


Data Sheet | Item Number: 857-168

Basic solid-state relay; Nominal input voltage: 60 VDC; Output voltage range: 24 ... 240 VAC; Limiting continuous current: 2 A

<https://www.wago.com/857-168>

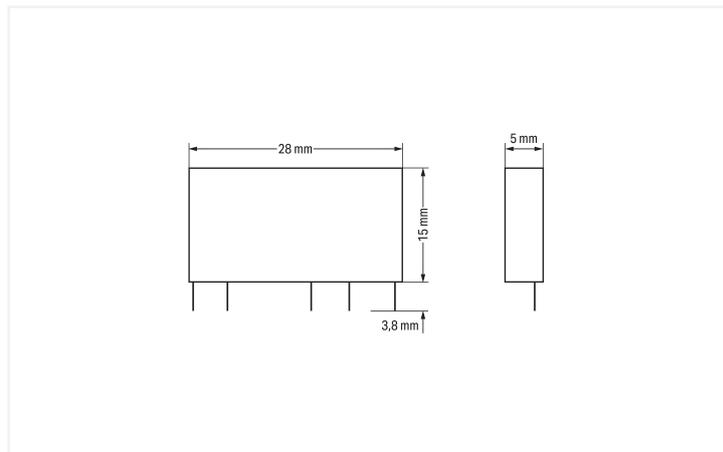

Notes

Note

Optocouplers and solid state relays are designed for use in signal processing networks that are not supplied directly by the low-voltage power supply network.

Technical data

Control circuit

Nominal input voltage U_N	60 VDC
Input voltage range (low level)	0 ... 10 VDC
Input voltage range (high level)	35 ... 72 VDC
Nominal input current at U_N	4 mA

Load circuit

Circuit type	2-wire connection Zero-voltage switching
Limiting continuous current	2 A
Nominal output voltage	230 VAC
Output voltage range	24 ... 240 VAC
Voltage drop	≤ 1.6 VAC
Leakage current at rated voltage	≤ 1.5 mA
Switching current (min.)	22 mA
Turn-on time	≤ 10 ms
Turn-off time	≤ 10 ms
Switching frequency	50 Hz / 60 Hz

Safety and protection

Dielectric strength (control/load circuit) (AC, 1 min)	3.75 kVrms
--	------------

Physical data

Width	5 mm / 0.197 inches
Height from the surface	15 mm / 0.591 inches
Depth	28 mm / 1.102 inches

Mechanical data

Mounting type	Pluggable module
---------------	------------------

Material data

Note (material data)	Information on material specifications can be found here
Insulation material (main housing)	Polyamide (PA66)
Flammability class per UL94	V0
Fire load	0 MJ
Weight	3.6 g

Environmental requirements

Ambient temperature (operation at U_N)	-30 ... +80 °C
Ambient temperature (storage)	-40 ... +100 °C
Relative humidity	5 ... 95 % (no condensation permissible)
Operating altitude (max.)	2000 m

Commercial data

Product Group	6 (INTERFACE ELECTRONIC)
PU (SPU)	20 pcs
Packaging type	Box
Country of origin	DE
GTIN	4045454997649
Customs tariff number	85365005000

Product Classification

UNSPSC	39122334
eCl@ss 10.0	27-26-15-03
eCl@ss 9.0	27-26-15-03
ETIM 9.0	EC001504
ETIM 10.0	EC001504
ECCN	NO US CLASSIFICATION

Environmental Product Compliance

RoHS Compliance Status	Compliant, No Exemption
------------------------	-------------------------

Approvals / Certificates

General approvals



Approval	Standard	Certificate Name
UL Underwriters Laboratories Inc.	UL 508	E340707

Downloads

Environmental Product Compliance

Compliance Search

Environmental Product Compliance 857-168	↓
---	---

Documentation

Bid Text

857-168	19.02.2019	xml 3.41 KB	↓
857-168	29.11.2018	doc 26.00 KB	↓

CAD/CAE-Data

CAD data

2D/3D Models 857-168	↓
----------------------	---

CAE data

EPLAN Data Portal 857-168	↓
WSCAD Universe 857-168	↓

Installation Notes

Installation



Removing a relay via ejector.

Subject to changes. Please also observe the further product documentation!

Current addresses can be found at: www.wago.com