

# Wall mounted receptacle

Part number: 9323



**MENNEKES**  
Elektrotechnik GmbH & Co. KG

Aloys-Mennekes-Straße 1  
57399 Kirchhundem  
GERMANY

[www.MENNEKES.org](http://www.MENNEKES.org)

# Product Description

- screw connection technology
- external fixing
- 25° inclination
- enclosure can be turned 180°
- receptacle is designed for adding an auxiliary contact switch
- highly resistant to chemicals

# Technical Details

| Wall mounted receptacle           | 9323                  |
|-----------------------------------|-----------------------|
| Ampere                            | 16A                   |
| Number of poles                   | 4p                    |
| Clock position                    | 7h                    |
| Nominal voltage AC                | 500V                  |
| Nominal frequency                 | 50 - 60 Hz            |
| Protection type IP                | IP67                  |
| Contact carrier                   | standard              |
| X-CONTACT                         | no                    |
| Connection                        | screw terminals       |
| Contact screw drive               | PZ2, slot             |
| Screw drive external screws       | PZ2, slot             |
| Pilot contact                     | without pilot contact |
| Pilot contact switch              | no                    |
| Cable entry at the top            | 1 x M25               |
| Cable entry at the bottom         | 2 x M25 (blind)       |
| Blind cable entry at the rear     | no                    |
| Enclosure base can be turned 180° | yes                   |
| Insertion direction               | angled                |
| Inclination                       | 25°                   |
| Type of mounting                  | external fixing       |
| Highly resistant to chemicals     | yes                   |
| Military version                  | no                    |
| Lockable                          | no                    |

| Wall mounted receptacle                                                                 | 9323                |
|-----------------------------------------------------------------------------------------|---------------------|
| Tightening torque connection terminal for cable cross-section 1,0 - 1,5 mm <sup>2</sup> | 0.6 Nm              |
| Tightening torque connection terminal for cable cross-section 2,5 - 4,0 mm <sup>2</sup> | 0.8 Nm              |
| Tightening torque connection terminal for cable cross-section 6 - 10 mm <sup>2</sup>    | 1.2 Nm              |
| Strip length PH + N solid conductor                                                     | 8 - 10 mm           |
| Strip length PE solid conductor                                                         | 12 - 17 mm          |
| Conductor cross-section min.                                                            | 1.5 mm <sup>2</sup> |
| Conductor cross-section max.                                                            | 4 mm <sup>2</sup>   |
| Weight (net)                                                                            | 378 g               |
| Packaging unit                                                                          | 5 pcs               |
| Quantity per pallet                                                                     | 420 pcs             |
| EAN / identification number                                                             | 4015394280415       |

#### Permissible ambient conditions

|                                   | Min.   | Max.  |
|-----------------------------------|--------|-------|
| Permissible ambient temperature   | -25 °C | 40 °C |
| Average temperature over 24 hours |        | 35 °C |

#### Material properties

|                 |                                         |
|-----------------|-----------------------------------------|
| Base            | PC/PET light grey [similar RAL 7035]    |
| Upper part      | PBT/PC light grey [similar RAL 7035]    |
| Hinged lid      | PA6 black [similar RAL 9005]            |
|                 | TPE black [similar RAL 9005]            |
|                 | PBT/PC squirrel grey [similar RAL 7000] |
| External screws | steel bare                              |

#### Material resistance

The material resistance overview can be found on the website in the section “Knowledge” - “Product knowledge” - “Materials”.

#### Material and environmental properties

RoHS 2011/65/EU incl. 2015/863/EU

✓

POP regulation (EU) 2019/1021

✓

Halogen-free

no

#### Regulations and Standards

Norm

DIN EN IEC 60309-2


Declaration of Conformity

CE

Test label

EAC, CQC

# Dimensional Drawing

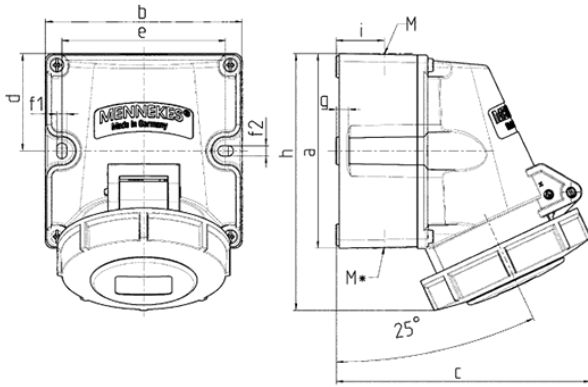

| Drawing<br>1 MB 622      | Amp.<br>Poles | 16                         |      |      | 32                         |      |      |
|--------------------------|---------------|----------------------------|------|------|----------------------------|------|------|
|                          |               | 3                          | 4    | 5    | 3                          | 4    | 5    |
| Dim. in mm               | a             | 100                        | 100  | 100  | 100                        | 100  | 100  |
|                          | b             | 101                        | 101  | 101  | 109                        | 109  | 109  |
|                          | c             | 117                        | 125  | 131  | 157                        | 157  | 160  |
|                          | d             | 50                         | 50   | 50   | 50                         | 50   | 50   |
|                          | e             | 84                         | 84   | 84   | 92                         | 92   | 92   |
|                          | f1            | 5.3                        | 5.3  | 5.3  | 5.3                        | 5.3  | 5.3  |
|                          | f2            | 5.3                        | 5.3  | 5.3  | 5.3                        | 5.3  | 5.3  |
|                          | g             | 6.5                        | 6.5  | 6.5  | 6.5                        | 6.5  | 6.5  |
|                          | h             | 131                        | 131  | 132  | 148                        | 148  | 148  |
|                          | i             | 24.7                       | 24.7 | 24.7 | 27.5                       | 27.5 | 27.5 |
|                          | M             | 25 (optional M20)          |      |      | 32 (optional M25)          |      |      |
|                          | M*            | 2x25 (blind) to be cut out |      |      | 2x25 (blind) to be cut out |      |      |
| Max. cable diam. (mm)    |               | 18 (M25) and 15 (M20)      |      |      | 25 (M32) and 18 (M25)      |      |      |
| Terminal for cond. cross |               | 1.5                        | 1.5  | 1.5  | 2.5                        | 2.5  | 2.5  |
| section (mm²) min.-max.  |               | —4                         | —4   | —4   | —6                         | —6   | —6   |