

PIXO PENDANT 3200LM 3CCT MB WB DALI WHITE
0004721



Features

• Simple and slick integral design. Extremely precise light beams due to the high-quality lenses. Easily replaceable lens system, die-cast aluminium body, beam angle: 36°, and 54° beam angle included in the packaging, Textured white finishing colour. Light color temperature: 2700-3000-4000K, 3-CCT switch on the housing of the product, System power: 29W, Fixture lumen output: 3200lm, efficacy: 110lm/W, Ra90 typical, LED chromacity: 3 step MacAdam ellipse LED source (SDCM3), IR/UV free light source without heat radiation. Operating voltage 220-240V / 50-60Hz, DALI-2 dimmable driver, ultra low LED flickering rate (5% or less)Ceiling surface mounting. Electrical protection: Class II. Degree of protection: IP20, suitable for indoor environment only. Push-in terminals for quick installation. Lifespan up to 100,000h, L90B10. Complete with 1.2m suspension cable, and a ceiling rose.Nominal product dimensions: D.81mmx1410mm. 5 years warranty. Recycling instructions for extra lens in this product: please contact us for recycling instructions or disposal.


Product Overview

Product name	PIXO PENDANT 3200LM 3CCT MB WB DALI WHITE
Technology	LED
Cap/Base	N/A
Housing	Aluminium
Mount	Ceiling surface mounting
General application	Museums & Galleries, Retail
ETIM Class	EC001743
E-number FI	4279905
Fixture luminous flux (lm)	3200
Luminaire efficacy (lm/W)	110

PIXO PENDANT 3200LM 3CCT MB WB DALI WHITE
0004721

Light colour	N/A
CRI (Ra)	90
Colour Variation Initial (SDCM)	3
Photobiological Risk Group	RG1
Total power consumption (W)	29
Electrical protection	Class II
Control gear type	LED driver constant current
Dimmable	Yes
Minimum dimming level (%)	1
Housing colour	White
IP rating	IP20
IK rating	IK03
Product EAN number	5410288047218
Warranty	5 years
Dimming method	DALI-2

Photometry

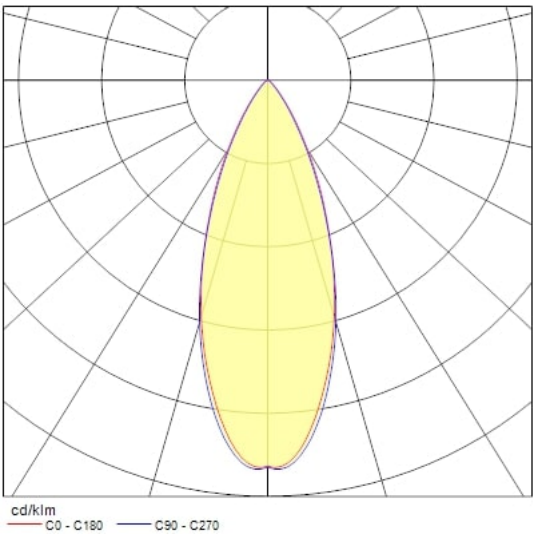

Technical drawings

