

START Highbay IP65 10000-20000lm 2CCT WB
0039443



Features

- Integrated LED highbay, RAL9006 White aluminium housing, 11.100 / 15.700 / 19.800lm for 4000K or 10.900 / 15.600 / 19.500lm for 6500K, 72 / 110 / 150W depends on the settings of the integrated switch for changing the colour temperature (4000/6500K) and light output level, 132lm/W @ 150W 4000K setting, CRI 80; 110° beam angle, IP65, IK08, lifespan L70:B50 120.000 hrs; (D x H) 270 x 115 mm, D-mark.


Product Overview

Product name	START Highbay IP65 10000-20000lm 2CCT WB
Technology	LED
Cap/Base	N/A
Housing	Aluminium
Mount	Suspended
General application	Logistics & Industry
ETIM Class	EC001716
E-number FI	4357151
Fixture luminous flux (lm)	19800
Luminaire efficacy (lm/W)	132
Light colour	Neutral White or Daylight
CRI (Ra)	80
Colour Variation Initial (SDCM)	5
Beam Angle (°)	110
Photobiological Risk Group	RG1
Total power consumption (W)	150
Electrical protection	Class I
Control gear type	LED driver constant current
Dimmable	No
LED Flickering Rate	Low (6% - 20%)

START Highbay IP65 10000-20000lm 2CCT WB
0039443

Housing colour	RAL9006
IP rating	IP65
IK rating	IK08
Product EAN number	5410288394435
Warranty	5 years
Dimming method	N/A

Photometry

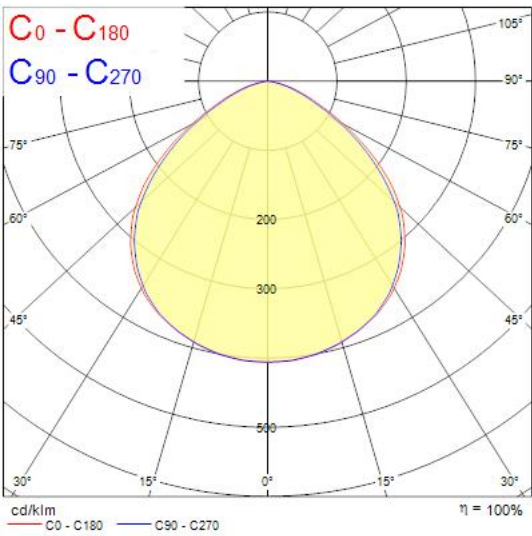

Technical drawings

