

NEW ENCLOSURES

XL³

& STRENGTH
& SIMPLICITY



-> CATALOGUE PAGES INSIDE

THE GLOBAL SPECIALIST
IN ELECTRICAL AND DIGITAL BUILDING INFRASTRUCTURES

 **legrand**[®]

XL³ S NEW ENCLOSURES



The XL³ S range has been specially designed to make the panel builder's job easier.

The strength and reliability of factory-assembled XL³ S enclosures, the comprehensive range, plus the numerous accessories offering a high degree of flexibility in installation are the main advantages of this new range.

DISCOVER OUR SERIES OF
VIDEOS DEVOTED TO THE
NEW XL³ S 160, 630
AND 4000 ENCLOSURES



XL³ S
160



XL³ S
630





02-03	Overview of the range
04-05	XL³ S 160
06-07	XL³ S 630/4000 The range
08-09	XL³ S 630/4000 The key points
10-11	XL³ S 630 Distribution
12-13	XL³ S 4000 Distribution
14-55	Catalogue pages

XL³ S

OVERVIEW OF THE RANGE



Residential

XL³ S 160 > PANELS UP TO 160 A



Offices

XL³ S 630 > PANELS UP TO 630 A



Standard commercial

XL³ S 4000 > PANELS UP TO 4000 A

Extent of the range

The XL³ S range consists of 3 families of enclosures in order to adapt to your site requirements as closely as possible: XL³ S 160, XL³ S 630 and XL³ S 4000.

The dimensions and capacities are designed in order to simplify choice and optimise costs, resulting in enclosures that are perfectly suited to your sites.

XL³ S 160
In up to 160 A



XL³ S 630
In up to 630 A



XL³ S 4000
In up to 4000 A



Width in number of modules per row

Compatible protection devices according to the enclosure size.

		24	36	16	24	36	16	24	36
DX ³ , TX ³	Modular circuit breakers up to 125 A								
DPX ³	160								
	250 / 250 HP / 630								
	1600								
DRX	125								
	250 / 250 HP / 630								
DPX-IS	250 / 630								
	1600								
SPX	000 / 00 / 1 / 2								
	3								
SPX ³ V									
SPX-D	160								
	250 / 400 / 630								
DPX ³	1600								
	2500								
	4000								

Faster installation time and ease of assembly

- Different fixing accessories created for easier assembly and finishing.



- All the enclosures are supplied ready-assembled in modular format.



- The new XL³ S 630 and 4000 enclosures benefit from common accessories, making it possible to optimise the amount of catalogue numbers in stock.
- They also benefit from dedicated supports which allow you to create a distribution system with copper or aluminium busbars.

Strength, rigidity and reliability

- Metal enclosures, with one-piece structure for maximum rigidity.
- Factory-assembled for guaranteed quality.
- Products certified by an independent body (LOVAG), allowing assemblies certified IEC 61439-2 and -3 to be created.




Services and tools

To aid the design, installation and maintenance of electrical panels.

- Range integrated in XLPro³.



- Technical support.
- Assembly instructions and guides (workshop specifications, assembly videos).

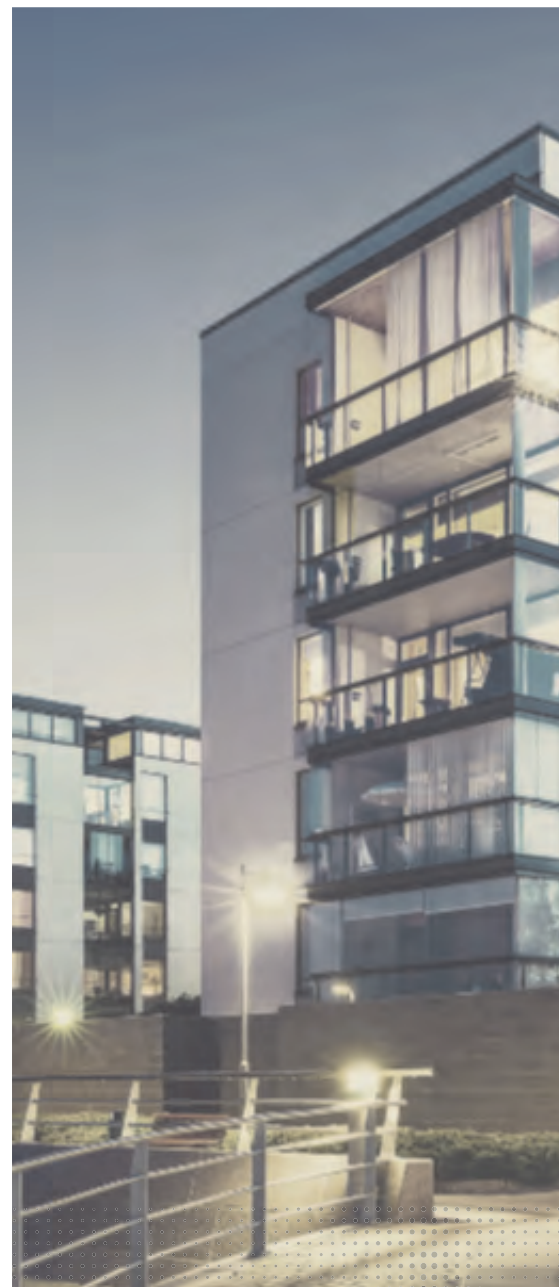

XL³ S 160

ONE-PIECE MODULAR ENCLOSURES READY TO USE



1 enclosure = 1 complete ready-to-use product

- One-piece metal enclosure for simple selection.
- IP30 without door/IP40 with door.
- A complete range available in both surface-mounting and flush-mounting versions for discreet integration in their environment, even outside an equipment room.
- Thanks to versions with 36 modules per row, you can create large-capacity enclosures with up to 288 modules to satisfy the requirements of commercial sector sites.

24 modules per row



36 modules per row



No. of modules/row	24	36
No. of rows	2 to 8	4 to 8
Capacity (no. of modules)	48 to 192	144 to 288

 Removable multi-row faceplates.
The height of the first and last row is optimised (200 mm) to take DPX³ 160 and DRX 125 MCCBs.

 Removable chassis allowing devices to be installed and wired outside the enclosure.

NUMEROUS ACCESSORIES FOR EASIER INSTALLATION AND SIMPLER MAINTENANCE



Wall mounting lugs



Blanking plates



Clip-on holders for self-adhesive labels




Self-adhesive document holders for plans




Height spacer, can be used to combine MCCBs and MCCBs on the same rail

XL³ S 160 - 24 modules - 2 and 4 rows

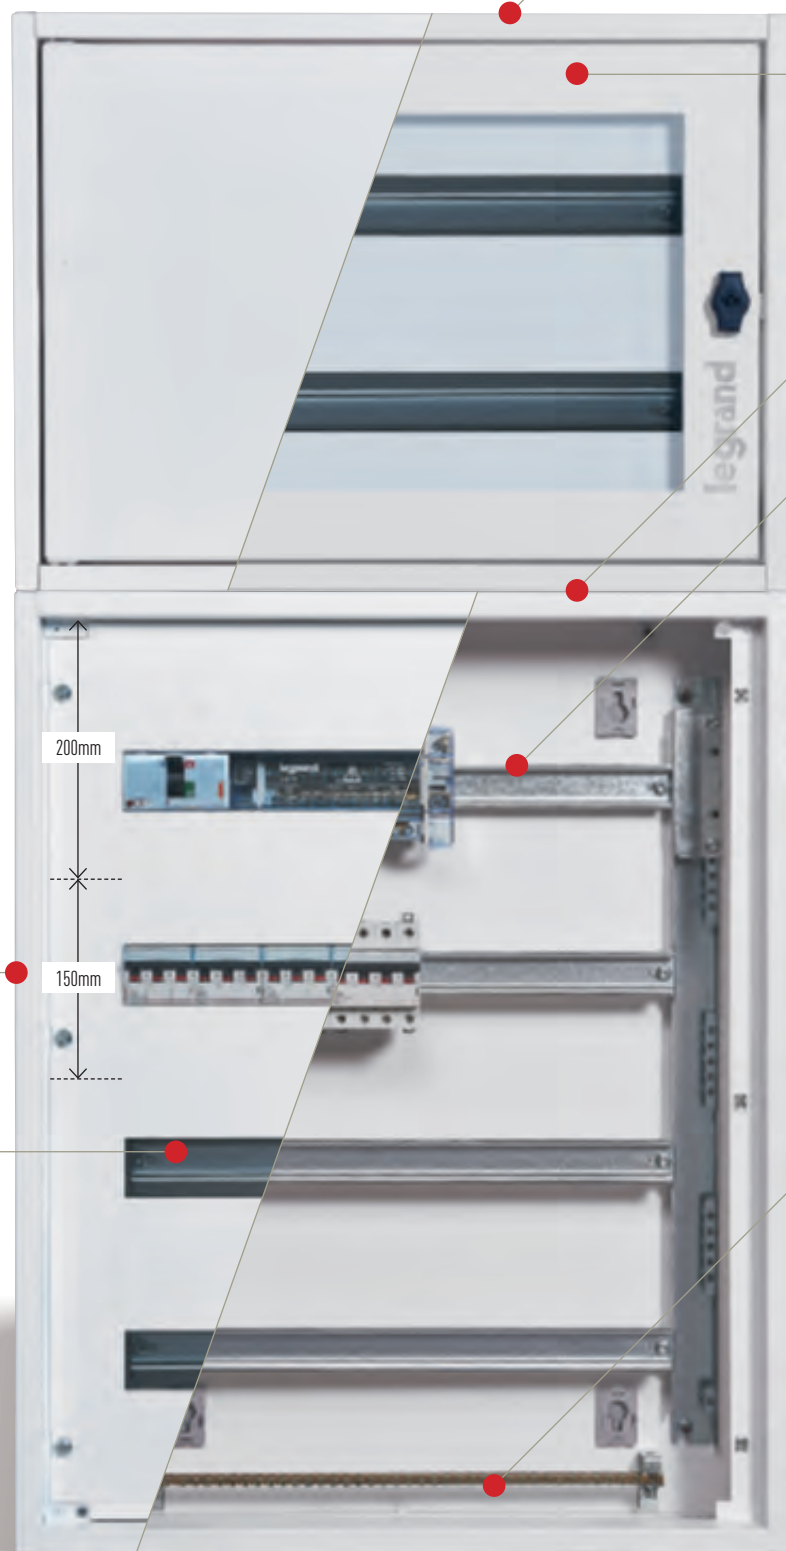

⌚ Equipped with cable entry plates with cut-outs to save time when installing



🔍 High-quality finish: White RAL 9003.

➡ XL³ S enclosures can be equipped with metal reversible doors.



⬆ Option of vertical joining thanks to the dedicated kit.


📏 Adjustable-depth DIN rails and removable, thus allowing 3 types of device to be mounted:

- modular devices
- DPX³ 160 MCCBs
- DRX 125 MCCBs or other devices of the same depth



📏 Equipped with supports for earth terminal blocks ready to take:

- IP2X terminal blocks
- brass terminal blocks
- copper terminal blocks

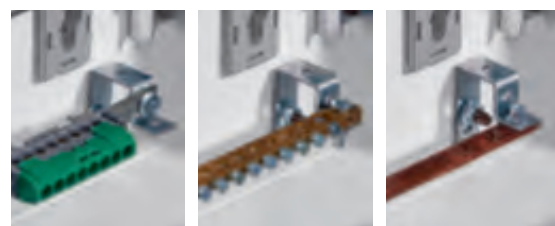

XL³ S 630 4000

CONFIGURABLE ENCLOSURES




- Rugged metal enclosures.
- Enclosures can be configured for greater flexibility depending on the choice of circuit breaker.
- Supplied assembled to save time when installing.
- **XL³ S 630**: 1 catalogue number = base + roof + structural uprights + functional uprights + fixing support for faceplates + rear panel.
- **XL³ S 4000**: 1 catalogue number = base + roof + structural uprights + corner pieces for plinth.
- IP30 without door/IP40 with door/IP43 with the dedicated kit.

XL³ S 630

Width (modules/row) usable width (mm)	Faceplate height (mm)	External cable sleeves (mm)
16 modules 450 mm	750	750
	900	900
	1050	1050
	1200	1200
24 modules 600 mm	1350	1350
	1500	1500
	1650	1650
	1800	1800
36 modules 800 mm	1950	1950
	2100	2100
	2250	2250

XL³ S 4000

Width (modules/row) usable width (mm)	Depth (mm)	Faceplate height (mm)	External cable sleeves (mm)
16 modules 350 mm			
24 modules 500 mm	400	1800 2000	1800 2000
	600		
	800		
36 modules 700 mm			

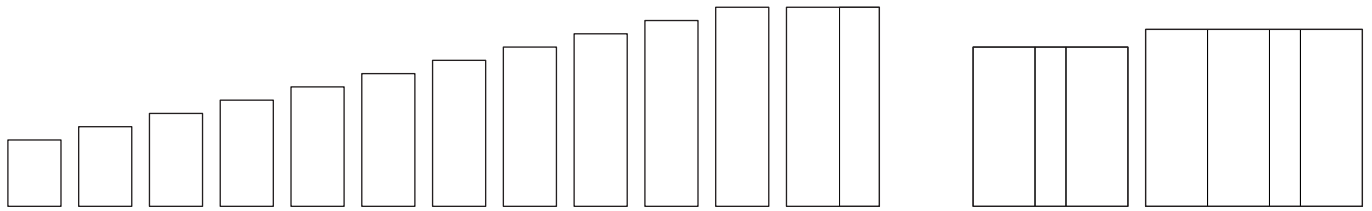

XL³ S 630 - 24 modules per row

XL³ S 4000 assembly consisting of 3 enclosures: 24, 16 and 36 modules



XL³ S 630

KEY POINTS 4000



Finishing kit for perfect aesthetic finish of enclosures without a door.



Faceplates with cut-outs available in all 3 enclosure widths to house the various protection devices up to 630 A (including in the 16-module width).



Fixed with (to be ordered separately):

- screws
- 1/4-turn screws
- snap-on fixing clips



Screw



1/4-turn screw



Snap-on fixing clips



Corner pieces for the plinth and trim panels supplied separately.



Covers all enclosure dimensions with a minimum amount of catalogue numbers to keep in stock.



High-quality finish:

- Metal doors and faceplates: White RAL 9003
- Body: Black RAL 7016



XL³ S enclosures can be equipped with metal or glass reversible doors.



Reversible handle.



Solid door

Glass door



The side panels of XL³ S 630 enclosures should be ordered separately, so that only the amount needed for installation are used, especially when enclosures are joined.

NUMEROUS ACCESSORIES FOR EASIER INSTALLATION AND SIMPLER MAINTENANCE



Lifting rings



Blanking plates




Clip-on holders for self-adhesive labels



Self-adhesive document holders for plans



Height spacer, can be used to combine MCBs and MCCBs on the same row

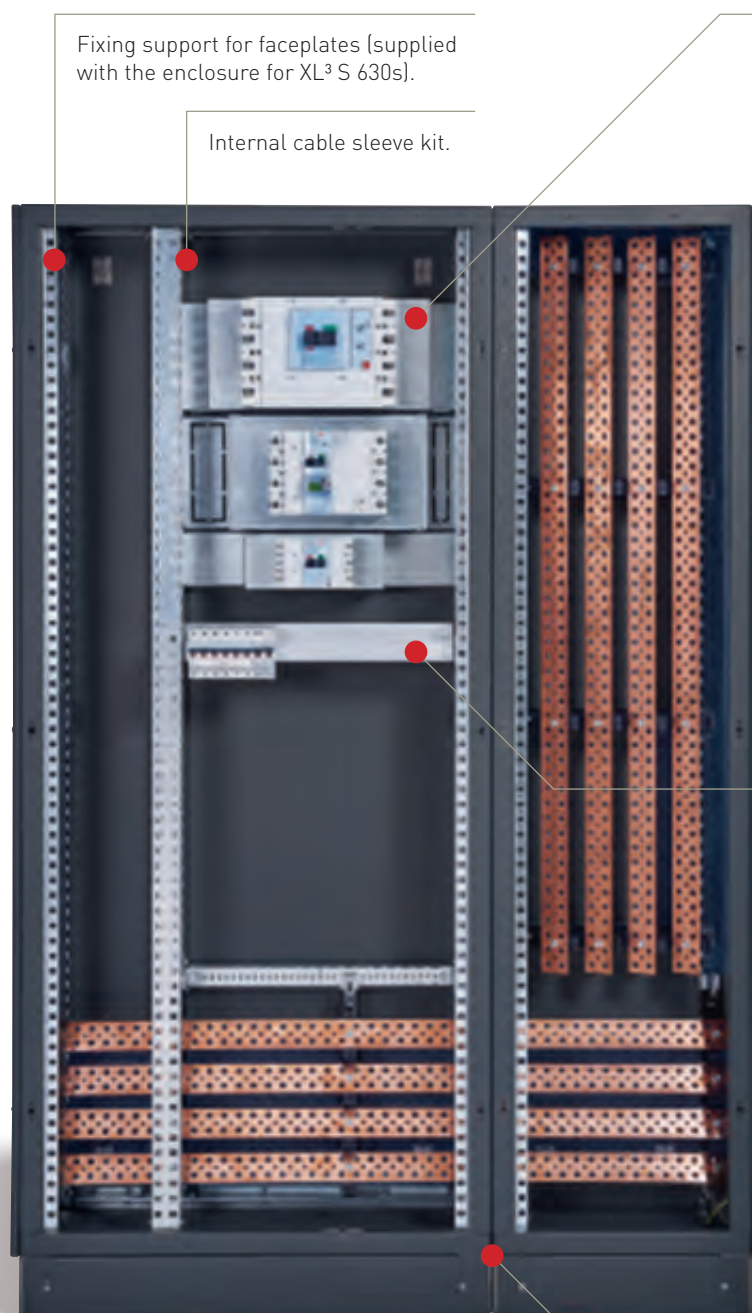


Fixing support for faceplates (supplied with the enclosure for XL³ S 630s).

Internal cable sleeve kit.

System for fixing plates on functional uprights with self-tapping screws.

Rails and universal plates (solid or perforated) allow even greater freedom when selecting devices.

Devices mounted on plate vertically and horizontally, with a reduced-height version to save even more time and optimise the whole installation to suit the busbar.

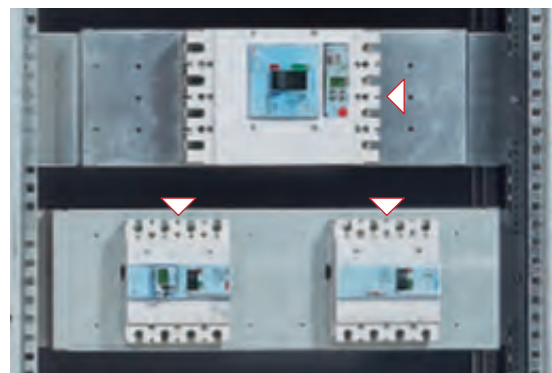

Adjustable-depth DIN rails which can be removed, allowing 3 types of device to be mounted:

- modular devices
- DPX³ 160 MCCBs
- DRX 125 MCCBs or other devices of the same depth



Removable cable gland plate.
Can be replaced by a Cabstop plate to save even more time when installing.



Option of joining at the side with dedicated kits (standard or reinforced) in order to increase the number of possible configurations and allow the installation to expand.




XL³ S 630

Fixing crosspieces and isolating supports for copper or aluminium busbars, specially designed to simplify selection, while allowing you to meet the requirements of your sites up to 630 A.


COPPER & ALUMINIUM DISTRIBUTION

XL³ S 630 enclosure equipped with copper busbars: main transfer horizontal + vertical in cable sleeve

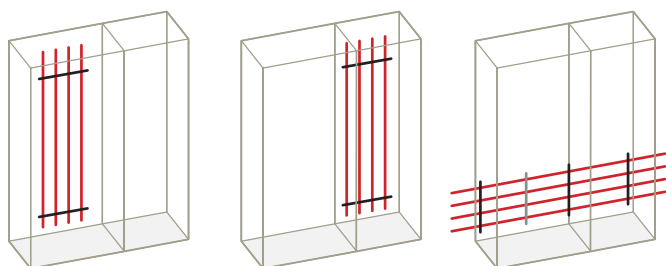


Fixing crosspiece

Thanks to the unique crosspiece fixing system, you have the option of fixing supports for copper or C-section aluminium busbars regardless of the enclosure dimensions.

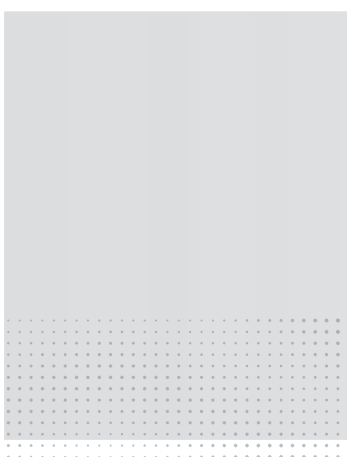

COPPER DISTRIBUTION



- Isolating support for copper busbars in sloping position for easier wiring.
- Mounted in vertical or horizontal position using fixing crosspieces adapted to the different enclosure widths.
- Isolating support available in sloping or staggered position for greater configuration flexibility.



Staggered position



Sloping position

XL³ S 630 enclosure equipped with a copper busbar
Vertical mounting at the back of enclosure

XL³ S 630 enclosure equipped with a C-section aluminium busbar
Vertical mounting in cable sleeve



→ **SELECTION CHART**
FIND ALL THE
CONFIGURATIONS AND
ACCESSORIES FOR
DISTRIBUTION
PAGES 50 TO 55.



- Isolating support for copper busbar in aligned position.
- Fixing crosspiece for busbar is screwed directly on the functional uprights at the back of the enclosure.



ALUMINIUM DISTRIBUTION



- Isolating support for C-section aluminium busbars in staggered position.
- Also available in aligned position version for busbar at the back of the enclosure.
- Aluminium distribution makes wiring faster and saves money on the whole installation.



Staggered position




Aligned position

XL³ S 4000

System of crosspieces and isolating supports for busbars up to 4000 A, designed to adapt easily to the different enclosure widths and depths, to the different mounting positions and to save you as much time as possible during installation.


COPPER & ALUMINIUM DISTRIBUTION

XL³ S 4000 enclosure equipped with copper busbars
Mounted vertically at the side in cable sleeve + transfer horizontal

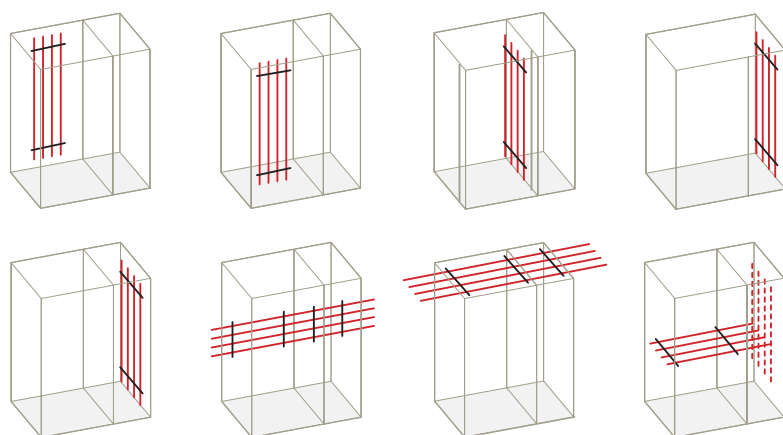

Supports for copper/ aluminium busbars


Using the kits for busbars, the same support is designed to take several dimensions of copper or C-section aluminium busbars.

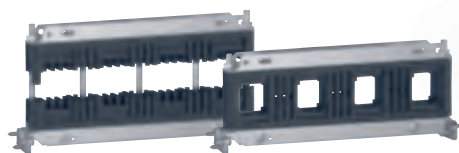

Isolating support equipped with kit for copper bars

Isolating support equipped with kit for C-section aluminium bars

COPPER DISTRIBUTION



- Isolating support for copper busbar in sloping position.
- Mounted in vertical or horizontal position using fixing crosspieces adapted to the different enclosure dimensions.
- Support available in sloping or staggered position for greater configuration flexibility.



Staggered position



Sloping position

COPPER OR ALUMINIUM DISTRIBUTION USING THE DEDICATED KITS



- Isolating support equipped with kit for copper bars.
- Mounted in vertical or horizontal position.
- Thanks to the kits for busbars, the isolating support can be used to install copper bars 5 or 10 mm thick and for heights between 50 and 125 mm.



XL³ S 4000 equipped with C-section aluminium busbars
Mounted vertically at the side in cable sleeve + transfer horizontal




Plate for mounting DMX³ air circuit breakers in XL³ S 4000 enclosures.




→ SELECTION TABLES

FIND ALL THE CONFIGURATIONS AND ACCESSORIES FOR DISTRIBUTION
PAGES 50 TO 55.



- Isolating support equipped with kit for C-section aluminium bars (75 and 125 mm fixing centres).
- Mounted in vertical or horizontal position.
- The support kit for double C-section aluminium busbars can be used to increase the current on busbars up to 3200 A.



ALUMINIUM DISTRIBUTION



- Isolating support for C-section aluminium busbar in staggered position.
- Also available in aligned position version for busbar at the back of the enclosure.
- The XL³ S 630 distribution system can also be installed vertically in XL³ S 4000 enclosures.



Staggered position up to 1600 A



Staggered position and aligned position up to 630 A

XL³ S 160 - 24 modules per row

“ready to use” metal distribution cabinets



3 372 04



3 372 24



Technical characteristics **p. 17**

Cabinets supplied with rails fitted (150 mm fixing centres) and full height faceplates

Doors and terminal blocks to be ordered separately

Take DPX³ 160 and modular protection devices

Used to create assemblies certified IEC 61439-2 and -3

IP 40 with door

IP 30 without door

Cut-outs in top and bottom for feeding cables through

Can take Lina 25 ducting

Pack Cat.Nos Surface-mounting 24-module cabinets

		Faceplates and body: RAL 9003						
Pack	Cat.Nos	No. of rows	No. of modules	Height (mm)	Width (mm)	Depth (mm)		
1	3 372 02	2	48	440	595	135		200
1	3 372 03	3	72	590	595	135		200
1	3 372 04	4	96	740	595	135		200
1	3 372 05	5	120	890	595	135		200
1	3 372 06	6	144	1040	595	135		200
1	3 372 07	7	168	1190	595	135		200
1	3 372 08	8	192	1340	595	135		200

Pack Cat.Nos Flush-mounting 24-module cabinets

		Supplied with fixing lugs Faceplates: RAL 9003						
Pack	Cat.Nos	No. of rows	No. of modules	Height (mm)	Width (mm)	Depth (mm)		
1	3 372 22	2	48	512	667	138		200
1	3 372 23	3	72	662	667	138		200
1	3 372 24	4	96	812	667	138		200
1	3 372 25	5	120	962	667	138		200
1	3 372 26	6	144	1112	667	138		200
1	3 372 27	7	168	1262	667	138		200
1	3 372 28	8	192	1412	667	138		200

XL³ S 160 - 36 modules per row

“ready to use” metal distribution cabinets



3 372 14



3 372 34



Technical characteristics **p. 17**

Cabinets supplied with rails fitted (150 mm fixing centres) and full height faceplates

Doors and terminal blocks to be ordered separately

Take DPX³ 160 and modular protection devices

Used to create assemblies certified IEC 61439-2 and -3






IP 40 with door

IP 30 without door






Cut-outs in top and bottom for feeding cables through

Can take Lina 25 ducting

Pack Cat.Nos Surface-mounting 36-module cabinets

Pack	Cat.Nos	Faceplates and body: RAL 9003					
		No. of rows	No. of modules	Height (mm)	Width (mm)	Depth (mm)	
1	3 372 14	4	144	740	810	135	
1	3 372 15	5	180	890	810	135	
1	3 372 16	6	216	1040	810	135	
1	3 372 17	7	252	1190	810	135	
1	3 372 18	8	288	1340	810	135	

Pack Cat.Nos Flush-mounting 36-module cabinets

Pack	Cat.Nos	Supplied with fixing lugs Faceplates: RAL 9003					
		No. of rows	No. of modules	Height (mm)	Width (mm)	Depth (mm)	
1	3 372 34	4	144	812	883	138	
1	3 372 35	5	180	962	883	138	
1	3 372 36	6	216	1112	883	138	
1	3 372 37	7	252	1262	883	138	
1	3 372 38	8	288	1412	883	138	

XL³ S 160

equipment and accessories



3 372 54



3 372 64



3 372 74



3 372 84



0 203 99

Pack	Cat.Nos	Metal doors
		Supplied with handle Cat.No 3 397 10
		For cabinets with 24 modules per row
		For cabinet (no. of modules)
1	3 372 52	2 × 24
1	3 372 53	3 × 24
1	3 372 54	4 × 24
1	3 372 55	5 × 24
1	3 372 56	6 × 24
1	3 372 57	7 × 24
1	3 372 58	8 × 24
		For cabinets with 36 modules per row
1	3 372 64	4 × 36
1	3 372 65	5 × 36
1	3 372 66	6 × 36
1	3 372 67	7 × 36
1	3 372 68	8 × 36

Pack	Cat.Nos	Glass doors
		For cabinets with 24 modules per row
		For cabinet (no. of modules)
1	3 372 72	2 × 24
1	3 372 73	3 × 24
1	3 372 74	4 × 24
1	3 372 75	5 × 24
1	3 372 76	6 × 24
1	3 372 77	7 × 24
1	3 372 78	8 × 24
		For cabinets with 36 modules per row
1	3 372 84	4 × 36
1	3 372 85	5 × 36
1	3 372 86	6 × 36
1	3 372 87	7 × 36
1	3 372 88	8 × 36

Pack	Cat.Nos	Replacement handle for doors
1	3 397 10	Handle for XL ³ S 160 door
1	3 397 15	Locking handle no. 405
		Supplied with a set of 2 keys

Pack	Cat.Nos	Accessories
1	3 374 04	Joining kit For connecting two surface-mounting XL ³ S 160 cabinets vertically
1	3 374 00	Wall mounting lugs Set of 4 lugs for wall mounting
1	3 374 06	Fixing kit for hollow partition Kit for fixing XL ³ S 160 flush-mounting cabinets in hollow partitions
1	3 374 05	Fixing support for ducting Set of 2 supports

Pack	Cat.Nos	Fixing plate and faceplate for DPX ³ 160
1	3 374 10	For XL ³ S 160 cabinets with 24 modules per row
1	3 374 11	For XL ³ S 160 cabinets with 36 modules per row

Pack	Cat.Nos	Rail position adjustment kit for DPX ³ 160
1	3 374 07	For positioning the rail at the correct height to take DPX ³ 160 MCCBs For XL ³ S 160 cabinets with 24 and 36 modules per row

Pack	Cat.Nos	Self-adhesive document holders for plans
		Open - RAL 7035
		External dimensions
		Height (mm) Width (mm)
20	0 365 80	235 340
20	0 365 81	165 260
		Internal dimensions
		Height (mm) Width (mm) Depth (mm)
		200 310 18
		130 230 18
		Closed - RAL 7035
1	0 365 82	Rigid, plastic, IP 50 Internal dimensions: 324 x 120 x 18 mm
		Transparent
10	0 097 99	Soft plastic, A4 - 305 x 220 mm

Pack	Cat.Nos	Rail height spacer
1	3 382 40	Used to combine modular devices and DPX ³ 160/250 on the same row
1	3 382 41	Used to combine modular devices and DRX on the same rail
1	3 382 42	Used to combine DRX and DPX ³ 160/250 on the same rail

Pack	Cat.Nos	White RAL 9003 blanking plates
20	0 016 60	5 modules. Separable into modules or half-modules
20	3 397 54	24 modules, untapped blanking panel which can be cut as required


Pack	Cat.Nos	Clip-on holders for self-adhesive labels
		Supplied with sheet of labels for marking rows on faceplate
10	3 397 55	24 modules
10	3 397 56	36 modules

Pack	Cat.Nos	Connection of protective conductors
		Additional brass bar
		For protective conductor. Fits using the lugs supplied with the cabinets
1	0 373 00	For 24-module width enclosure
1	3 397 57	For 36-module width enclosure
		Equipotential link conductor
1	3 397 53	Length 350 mm. Cross-section 6 mm ²

XL³ S 160

technical characteristics

■ Dimensions of surface-mounting cabinets

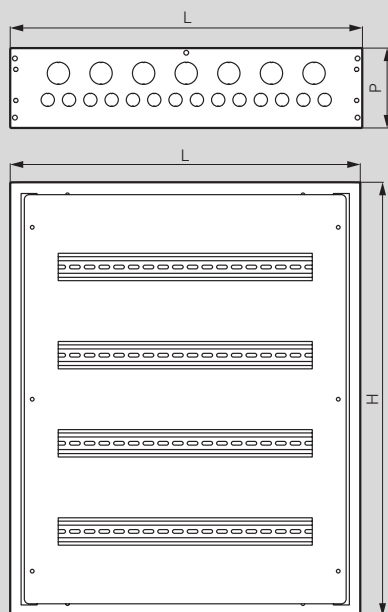


24-module cabinets

Cat.Nos	H (mm)	W (mm)	D (mm)
3 372 02	440	595	135
3 372 03	590	595	135
3 372 04	740	595	135
3 372 05	890	595	135
3 372 06	1040	595	135
3 372 07	1190	595	135
3 372 08	1340	595	135

36-module cabinets

Cat.Nos	H (mm)	W (mm)	D (mm)
3 372 14	740	810	135
3 372 15	890	810	135
3 372 16	1040	810	135
3 372 17	1190	810	135
3 372 18	1340	810	135

■ Dimensions of flush-mounting cabinets

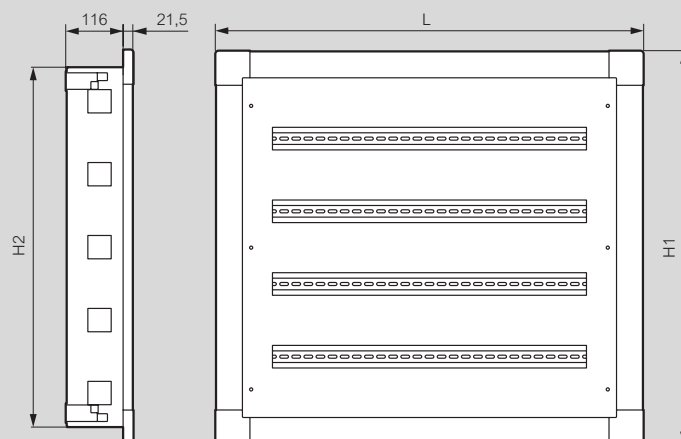

24-module cabinets

Cat.Nos	H1 (mm)	H2 (mm)	W (mm)
3 372 22	512	440	667
3 372 23	662	590	667
3 372 24	812	740	667
3 372 25	962	890	667
3 372 26	1112	1040	667
3 372 27	1262	1190	667
3 372 28	1412	1340	667

36-module cabinets

Cat.Nos	H1 (mm)	H2 (mm)	W (mm)
3 372 34	812	740	883
3 372 35	962	890	883
3 372 36	1112	1040	883
3 372 37	1262	1190	883
3 372 38	1412	1340	883

DEVICE	ENCLOSURE	POSITION	CONFIGURATION	
	FIXING ON RAIL			
MCBs	16 modules wide	Vertical	-	
	24 modules wide	Vertical	-	
	36 modules wide	Vertical	-	
DPX ³ 160	16 modules wide	Vertical	Without side motor-driven handle	
		Vertical	With e.l.c.b without side motor-driven handle	
		Vertical	With side motor-driven handle	
	24 modules wide	Vertical	Without side motor-driven handle	
		Vertical	With e.l.c.b without side motor-driven handle	
		Vertical	With side motor-driven handle	
	36 modules wide	Vertical	Without side motor-driven handle	
		Vertical	With e.l.c.b without side motor-driven handle	
		Vertical	With side motor-driven handle	
DPX ³ 250	16 modules wide	Vertical	Without side motor-driven handle	
		Vertical	With e.l.c.b without side motor-driven handle	
		Vertical	With side motor-driven handle	
		Vertical	With e.l.c.b and terminal shield	
	24 modules wide	Vertical	Without side motor-driven handle	
		Vertical	With e.l.c.b without side motor-driven handle	
		Vertical	With side motor-driven handle	
		Vertical	With e.l.c.b and terminal shield	
	36 modules wide	Vertical	Without side motor-driven handle	
		Vertical	With e.l.c.b without side motor-driven handle	
		Vertical	With side motor-driven handle	
		Vertical	With e.l.c.b and terminal shield	
DRX 125 HP	FIXING ON PLATE			
	16 modules wide	Horizontal	3P	
			4P	
	24 modules wide	Horizontal	3P	
			4P	
	36 modules wide	Horizontal	3P	
			4P	
	16 modules wide	Vertical	3P/4P	
			3P	
24 modules wide	Vertical	4P		
		3P		
36 modules wide	Vertical	4P		
		3P		
DPX ³ 160	16 modules wide	Horizontal	3P	
			3P or 4P with or without e.l.c.b	
	24 modules wide	Horizontal	3P	
			3P or 4P with or without e.l.c.b	
	36 modules wide	Horizontal	3P	
			3P or 4P with or without e.l.c.b	
	16 modules wide	Vertical	3P or 4P	
			4P with e.l.c.b	
			3P/4P with rotary handle	
	24 modules wide	Vertical	3P	
			4P	
			4P with e.l.c.b	
3P/4P with rotary handle				
36 modules wide	Vertical	3P		
		4P		
		4P with e.l.c.b		
		3P/4P with rotary handle		

	FIXING DEVICES			FACEPLATES	
	RAIL	PLATE	BRACKETS	HEIGHT (mm)	
FIXING ON RAIL					
	3 382 20	-	-	150	3 382 51
	3 382 23	-	-	150	3 382 52
	3 382 26	-	-	150	3 382 53
	3 382 20 + 4 210 71	-	-	300	3 382 71
	3 382 20 + 4 210 73	-	-	300	3 382 71
	3 382 20 + 4 210 68	-	-	300	3 382 71
	3 382 23 + 4 210 71	-	-	300	3 382 72
	3 382 23 + 4 210 73	-	-	300	3 382 72
	3 382 23 + 4 210 68	-	-	300	3 382 72
	3 382 26 + 4 210 71	-	-	300	3 382 73
	3 382 26 + 4 210 73	-	-	300	3 382 73
	3 382 26 + 4 210 68	-	-	300	3 382 73
	3 382 20 + 4 210 72	-	-	300	3 382 71
	3 382 20 + 4 210 74	-	-	300	3 382 71
	3 382 20 + 4 210 69	-	-	300	3 382 71
	3 382 20 + 4 210 74	-	-	400	3 382 81
	3 382 23 + 4 210 72	-	-	300	3 382 72
	3 382 23 + 4 210 74	-	-	300	3 382 72
	3 382 23 + 4 210 69	-	-	300	3 382 72
	3 382 23 + 4 210 74	-	-	400	3 382 82
	3 382 26 + 4 210 72	-	-	300	3 382 73
	3 382 26 + 4 210 74	-	-	300	3 382 73
	3 382 26 + 4 210 69	-	-	300	3 382 73
	3 382 26 + 4 210 74	-	-	400	3 382 83
FIXING ON PLATE					
	-	3 385 00	-	100	3 383 50
	-	3 385 01	-	150	3 383 51
	-	3 385 03	-	100	3 384 53
	-	3 385 04	-	150	3 384 54
	-	3 385 06	-	100	3 383 56
	-	3 385 07	-	150	3 383 57
	-	3 385 21	-	200	3 382 61
	-	3 385 23	-	200	3 382 62
	-	3 385 24	-	200	3 382 62
	-	3 385 26	-	200	3 382 63
	-	3 385 27	-	200	3 382 63
	-	3 383 00	-	100	3 383 50
	-	3 383 01	-	150	3 383 51
	-	3 383 03	-	100	3 383 53
	-	3 383 04	-	150	3 383 54
	-	3 383 06	-	100	3 383 56
	-	3 383 07	-	150	3 383 57
	-	3 383 20	-	300	3 382 71
	-	3 383 21	-	300	3 382 71
	-	3 383 80	-	300	3 382 71
	-	3 383 23	-	300	3 382 72
	-	3 383 24	-	300	3 382 72
	-	3 383 25	-	300	3 382 72
	-	3 383 81	-	300	3 382 72
	-	3 383 26	-	300	3 382 73
	-	3 383 27	-	300	3 382 73
	-	3 383 28	-	300	3 382 73
	-	3 383 82	-	300	3 382 73

XL³ S 630

selection chart (continued)

DEVICE	ENCLOSURE	POSITION	CONFIGURATION	
			FIXING ON PLATE	
DPX ³ 250	16 modules wide	Horizontal	3P 3P or 4P with or without e.l.c.b	
	24 modules wide	Horizontal	3P 3P or 4P with or without e.l.c.b	
	36 modules wide	Horizontal	3P 3P or 4P with or without e.l.c.b	
	16 modules wide	Vertical	3P or 4P 4P with e.l.c.b 3P/4P with rotary handle	
	24 modules wide	Vertical	3P 4P 4P with e.l.c.b 3P/4P with rotary handle	
	36 modules wide	Vertical	3P 4P 4P with e.l.c.b 3P/4P with rotary handle	
	16 modules wide	Horizontal	3P 4P	
	24 modules wide	Horizontal	3P 4P	
	36 modules wide	Horizontal	3P 4P	
	16 modules wide	Vertical	3P 4P	
	24 modules wide	Vertical	3P 4P	
	36 modules wide	Vertical	3P 4P	
DRX 250 HP	16 modules wide	Horizontal	3P 4P with or without e.l.c.b	
	24 modules wide	Horizontal	3P 4P with or without e.l.c.b	
	36 modules wide	Horizontal	3P 4P with or without e.l.c.b	
	16 modules wide	Vertical	3P 4P with or without e.l.c.b	
	24 modules wide	Vertical	3P 4P with or without e.l.c.b	
	36 modules wide	Vertical	3P 4P with or without e.l.c.b	
	16 modules wide	Horizontal	3P 4P with or without e.l.c.b	
	24 modules wide	Horizontal	3P 4P with or without e.l.c.b	
	36 modules wide	Horizontal	3P 4P with or without e.l.c.b	
	16 modules wide	Vertical	3P 4P with or without e.l.c.b	
	24 modules wide	Vertical	3P 4P with or without e.l.c.b	
	36 modules wide	Vertical	3P 4P with or without e.l.c.b	
DPX ³ 250 HP	16 modules wide	Horizontal	3P 4P with or without e.l.c.b	
	24 modules wide	Horizontal	3P 4P with or without e.l.c.b	
	36 modules wide	Horizontal	3P 4P with or without e.l.c.b	
	16 modules wide	Vertical	3P 4P with or without e.l.c.b	
	24 modules wide	Vertical	3P 4P with or without e.l.c.b	
	36 modules wide	Vertical	3P 4P with or without e.l.c.b	
	16 modules wide	Horizontal	3P or 4P	
	24 modules wide	Horizontal	3P or 4P	
	36 modules wide	Horizontal	3P or 4P	
	16 modules wide	Vertical	3P or 4P	
	24 modules wide	Vertical	3P or 4P	
	36 modules wide	Vertical	3P or 4P	
DPX-IS 250	16 modules wide	Horizontal	3P 3P or 4P without e.l.c.b	
	24 modules wide	Horizontal	3P 3P or 4P without e.l.c.b	
	36 modules wide	Horizontal	3P 3P or 4P without e.l.c.b	
	16 modules wide	Vertical	3P 3P/4P without e.l.c.b 4P with e.l.c.b 3P/4P with rotary handle 3P/4P with motor-driven handle	
	24 modules wide	Vertical	3P 3P/4P without e.l.c.b 4P with e.l.c.b 3P/4P with rotary handle 3P/4P with motor-driven handle 3P/4P transfer switch without motor-driven handle	
	36 modules wide	Vertical	3P 3P/4P without e.l.c.b 4P with e.l.c.b 3P/4P with rotary handle 3P/4P with motor-driven handle 3P/4P transfer switch without motor-driven handle	
	16 modules wide	Horizontal	3P or 4P	
	24 modules wide	Horizontal	3P or 4P	
	36 modules wide	Horizontal	3P or 4P	
	16 modules wide	Vertical	3P or 4P	
	24 modules wide	Vertical	3P or 4P	
	36 modules wide	Vertical	3P or 4P	
DPX ³ 630	16 modules wide	Horizontal	3P 3P or 4P without e.l.c.b	
	24 modules wide	Horizontal	3P 3P or 4P without e.l.c.b	
	36 modules wide	Horizontal	3P 3P or 4P without e.l.c.b	
	16 modules wide	Vertical	3P 3P/4P without e.l.c.b 4P with e.l.c.b 3P/4P with rotary handle 3P/4P with motor-driven handle	
	24 modules wide	Vertical	3P 3P/4P without e.l.c.b 4P with e.l.c.b 3P/4P with rotary handle 3P/4P with motor-driven handle 3P/4P transfer switch without motor-driven handle	
	36 modules wide	Vertical	3P 3P/4P without e.l.c.b 4P with e.l.c.b 3P/4P with rotary handle 3P/4P with motor-driven handle 3P/4P transfer switch without motor-driven handle	
	16 modules wide	Horizontal	3P or 4P	
	24 modules wide	Horizontal	3P or 4P	
	36 modules wide	Horizontal	3P or 4P	
	16 modules wide	Vertical	3P or 4P	
	24 modules wide	Vertical	3P or 4P	
	36 modules wide	Vertical	3P or 4P	
DPX-IS 630	16 modules wide	Horizontal	3P or 4P	
	24 modules wide	Horizontal	3P or 4P	
	36 modules wide	Horizontal	3P or 4P	
	16 modules wide	Vertical	3P or 4P	
	24 modules wide	Vertical	3P or 4P	
	36 modules wide	Vertical	3P or 4P	
	16 modules wide	Horizontal	3P or 4P	
	24 modules wide	Horizontal	3P or 4P	
	36 modules wide	Horizontal	3P or 4P	
	16 modules wide	Vertical	3P or 4P	
	24 modules wide	Vertical	3P or 4P	
	36 modules wide	Vertical	3P or 4P	

	FACEPLATES		
	PLATE	HEIGHT (mm)	
		FIXING ON PLATE	
	3 384 00	150	3 384 50
	3 384 01	200	3 384 51
	3 384 03	150	3 384 53
	3 384 04	200	3 384 54
	3 384 06	150	3 384 56
	3 384 07	200	3 384 57
	3 384 20	300	3 382 71
	3 384 21	300	3 382 71
	3 383 80	300	3 382 71
	3 384 23	300	3 382 72
	3 384 24	300	3 382 72
	3 384 25	300	3 382 72
	3 383 81	300	3 382 72
	3 384 26	300	3 382 73
	3 384 27	300	3 382 73
	3 384 28	300	3 382 73
	3 383 82	300	3 382 73
	3 386 00	150	3 384 50
	3 386 01	200	3 384 51
	3 386 03	150	3 384 53
	3 386 04	200	3 384 54
	3 386 06	150	3 384 56
	3 386 07	200	3 384 57
	3 386 20	300	3 382 71
	3 386 21	300	3 382 71
	3 386 23	300	3 382 72
	3 386 24	300	3 382 72
	3 386 26	300	3 382 73
	3 386 27	300	3 382 73
	3 386 00	150	3 386 50
	3 386 01	200	3 386 51
	3 386 03	150	3 386 53
	3 386 04	200	3 386 54
	3 386 06	150	3 386 56
	3 386 07	200	3 386 57
	3 386 20	300	3 386 70
	3 386 21	300	3 386 71
	3 386 23	300	3 386 73
	3 386 24	300	3 386 74
	3 386 26	300	3 386 76
	3 386 27	300	3 386 77
	3 389 02	300	3 389 42
	3 389 04	300	3 389 44
	3 389 20	300	3 382 71
	3 389 22	300	3 382 72
	3 389 24	300	3 382 73
	3 387 00	150	3 387 50
	3 387 01	200	3 387 51
	3 387 03	150	3 387 53
	3 387 04	200	3 387 54
	3 387 06	150	3 387 56
	3 387 07	200	3 387 57
	3 387 07	200	3 387 58
	3 387 20	400	3 387 70
	3 387 21	600	3 387 71
	3 386 86	400	3 383 92
	3 383 89	400	3 383 92
	3 387 24	400	3 387 74
	3 387 25	600	3 387 75
	3 383 87	400	3 383 93
	3 383 90	400	3 383 93
	3 384 80	400	3 384 84
	3 387 27	400	3 387 77
	3 387 28	600	3 387 78
	3 383 88	400	3 383 94
	3 383 91	400	3 383 94
	3 384 81	400	3 384 85
	3 390 02	300	3 390 41
	3 390 14	300	3 390 43
	3 390 20	400	3 390 50
	3 390 22	400	3 390 52
	3 390 24	400	3 390 54

XL³ S 630

selection chart (continued)

DEVICE	ENCLOSURE	POSITION	CONFIGURATION	
	FIXING ON PLATE			
DCX-M SIZE 1 UP TO 63 A	24 modules wide	Vertical	-	
DCX-M SIZE 2 UP TO 160 A	24 modules wide	Vertical	-	
DCX-M SIZE 3 UP TO 400 A	24 modules wide	Vertical	-	
DCX-M SIZE 4 UP TO 630 A	24 modules wide	Vertical	-	
SPX 000	16 modules wide	Vertical	3P	
	24 modules wide	Vertical	3P	
	36 modules wide	Vertical	3P	
SPX 00	16 modules wide	Vertical	3P	
	24 modules wide	Vertical	3P	
	36 modules wide	Vertical	3P	
SPX 1	16 modules wide	Vertical	3P	
	24 modules wide	Vertical	3P	
	36 modules wide	Vertical	3P	
SPX 2	16 modules wide	Vertical	3P	
	24 modules wide	Vertical	3P	
	36 modules wide	Vertical	3P	
SPX 3	24 modules wide	Vertical	3P	
	36 modules wide	Vertical	3P	
SPX-D 160	16 modules wide	Vertical	3P or 4P	
	24 modules wide	Vertical	3P or 4P	
	36 modules wide	Vertical	3P or 4P	
SPX 000	FIXING ON BUSBARS			
	16 modules wide	Vertical	3P	
	24 modules wide	Vertical	3P	
	36 modules wide	Vertical	3P	
SPX 00	16 modules wide	Vertical	3P	
	24 modules wide	Vertical	3P	
	36 modules wide	Vertical	3P	
SPX 1	16 modules wide	Vertical	3P	
	24 modules wide	Vertical	3P	
	36 modules wide	Vertical	3P	
SPX 2	16 modules wide	Vertical	3P	
	24 modules wide	Vertical/Horizontal ⁽¹⁾	3P	
	36 modules wide	Vertical/Horizontal ⁽²⁾	3P	
SPX 3	24 modules wide	Vertical/Horizontal ⁽¹⁾	3P	
	36 modules wide	Vertical/Horizontal ⁽²⁾	3P	

1: With crosspiece Cat.No 3 379 81
2: With crosspiece Cat.No 3 379 82

	FIXING DEVICES			FACEPLATES	
	RAIL	PLATE	BRACKETS	HEIGHT (MM)	
	FIXING ON PLATE				
	-	3 390 60	-	200	3 390 61
	-	3 390 62	-	200	3 390 63
	-	3 390 64	-	300	3 390 65
	-	3 390 66	-	400	3 390 67
	-	3 392 60	-	300	3 392 70
	-	3 392 61	-	300	3 392 71
	-	3 392 62	-	300	3 392 72
	-	3 392 60	-	300	3 393 00
	-	3 392 61	-	300	3 393 01
	-	3 392 62	-	300	3 393 02
	-	3 393 20	-	400	3 393 30
	-	3 393 21	-	400	3 393 31
	-	3 393 22	-	400	3 393 32
	-	3 393 50	-	400	3 393 60
	-	3 393 51	-	400	3 393 61
	-	3 393 52	-	400	3 393 62
	-	3 393 81	-	400	3 393 91
	-	3 393 82	-	400	3 393 92
	-	3 394 60	-	300	3 394 71
	-	3 394 61	-	300	3 394 73
	-	3 394 62	-	300	3 394 75
	FIXING ON BUSBARS				
	-	-	3 392 50	300	3 392 70
	-	-	3 392 50	300	3 392 71
	-	-	3 392 50	300	3 392 72
	-	-	3 392 50	300	3 393 00
	-	-	3 392 50	300	3 393 01
	-	-	3 392 50	300	3 393 02
	-	-	3 392 50	400	3 393 30
	-	-	3 392 50	400	3 393 31
	-	-	3 392 50	400	3 393 32
	-	-	3 392 50	400	3 393 60
	-	-	3 392 50	400	3 393 61
	-	-	3 392 50	400	3 393 62
	-	-	3 392 50	400	3 393 91
	-	-	3 392 50	400	3 393 92

XL³ S 630

distribution enclosures



Technical characteristics p. 35

Enclosures equipped with functional uprights and supplied with fixing supports for faceplates (fixing accessories for faceplates to be ordered separately p. 33)
Doors and side panels to be ordered separately
Take protection devices up to 630 A
Used to create assemblies certified IEC 61439-2
IP 40 with door
IP 30 without door
Removable, separable top and bottom panels
Can take Lina 25 ducting and IP 55 Cabstop cable gland plates (p. 34)


Pack	Cat.Nos	Enclosures				
		16 modules wide				
		Faceplates: RAL 9003				
		Body: RAL 7016				
		Height (mm)		Width (mm)		Depth (mm)
		total	faceplate	total	usable	
1	3 375 21	824	750	454	350	249
1	3 375 31	974	900	454	350	249
1	3 375 41	1124	1050	454	350	249
1	3 375 51	1274	1200	454	350	249
1	3 375 61	1424	1350	454	350	249
1	3 375 71	1574	1500	454	350	249
1	3 375 81	1724	1650	454	350	249
1	3 375 91	1874	1800	454	350	249
1	3 376 01	2024	1950	454	350	249
1	3 376 11	2174	2100	454	350	249
1	3 376 21	2324	2250	454	350	249
		24 modules wide				
1	3 375 22	824	750	604	500	249
1	3 375 32	974	900	604	500	249
1	3 375 42	1124	1050	604	500	249
1	3 375 52	1274	1200	604	500	249
1	3 375 62	1424	1350	604	500	249
1	3 375 72	1574	1500	604	500	249
1	3 375 82	1724	1650	604	500	249
1	3 375 92	1874	1800	604	500	249
1	3 376 02	2024	1950	604	500	249
1	3 376 12	2174	2100	604	500	249
1	3 376 22	2324	2250	604	500	249
		36 modules wide				
1	3 375 23	824	750	804	700	249
1	3 375 33	974	900	804	700	249
1	3 375 43	1124	1050	804	700	249
1	3 375 53	1274	1200	804	700	249
1	3 375 63	1424	1350	804	700	249
1	3 375 73	1574	1500	804	700	249
1	3 375 83	1724	1650	804	700	249
1	3 375 93	1874	1800	804	700	249
1	3 376 03	2024	1950	804	700	249
1	3 376 13	2174	2100	804	700	249
1	3 376 23	2324	2250	804	700	249

Pack	Cat.Nos	Internal cable sleeves				
		Internal cable sleeve kits				
		For mounting on either the right or left inside XL ³ S 630 enclosures				
		Height (mm)		Width (mm)		Depth (mm)
		total	faceplate	total	usable	
1	3 379 32	824	750	324	249	249
1	3 379 33	974	900	324	249	249
1	3 379 34	1124	1050	324	249	249
1	3 379 35	1274	1200	324	249	249
1	3 379 36	1424	1350	324	249	249
1	3 379 37	1574	1500	324	249	249
1	3 379 38	1724	1650	324	249	249
1	3 379 39	1874	1800	324	249	249
1	3 379 40	2024	1950	324	249	249
1	3 379 41	2174	2100	324	249	249
1	3 379 42	2324	2250	324	249	249
		External cable sleeves				
		Side cable sleeves				
		Fitted on either the right or left of enclosures using joining kits Cat.Nos 3 379 49/50				
		Height (mm)		Width (mm)		Depth (mm)
		total	faceplate	total	usable	
1	3 375 20	824	750	324	249	249
1	3 375 30	974	900	324	249	249
1	3 375 40	1124	1050	324	249	249
1	3 375 50	1274	1200	324	249	249
1	3 375 60	1424	1350	324	249	249
1	3 375 70	1574	1500	324	249	249
1	3 375 80	1724	1650	324	249	249
1	3 375 90	1874	1800	324	249	249
1	3 376 00	2024	1950	324	249	249
1	3 376 10	2174	2100	324	249	249
1	3 376 20	2324	2250	324	249	249
		Side panels				
		Set of 2 panels				
		For cabinets or cable sleeves with faceplate height (mm)				
1	3 378 62	750				
1	3 378 63	900				
1	3 378 64	1050				
1	3 378 65	1200				
1	3 378 66	1350				
1	3 378 67	1500				
1	3 378 68	1650				
1	3 378 69	1800				
1	3 378 70	1950				
1	3 378 71	2100				
1	3 378 72	2250				

Functional uprights for internal cable sleeves p. 26

XL³ S 630

doors for enclosures

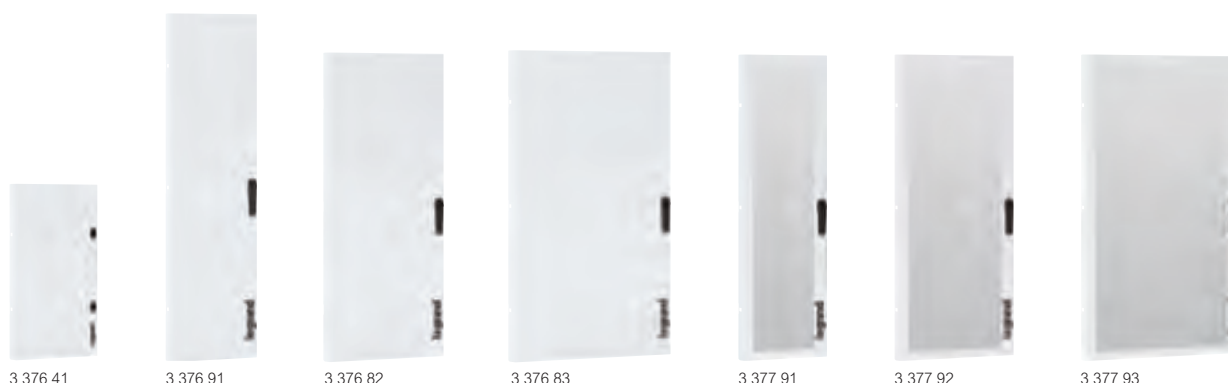

Pack	Cat.Nos	Metal doors for XL ³ S 630 enclosures
		Supplied with fixed handle Key barrel to be ordered separately 2 or 3 locking points (depending on door height)
		16 modules wide For cabinets with faceplate height (mm)
1	3 376 41	750
1	3 376 51	900
1	3 376 61	1050
1	3 376 71	1200
1	3 376 81	1350
1	3 376 91	1500
1	3 377 01	1650
1	3 377 11	1800
1	3 377 21	1950
1	3 377 31	2100
1	3 377 41	2250
		24 modules wide
1	3 376 42	750
1	3 376 52	900
1	3 376 62	1050
1	3 376 72	1200
1	3 376 82	1350
1	3 376 92	1500
1	3 377 02	1650
1	3 377 12	1800
1	3 377 22	1950
1	3 377 32	2100
1	3 377 42	2250
		36 modules wide
1	3 376 43	750
1	3 376 53	900
1	3 376 63	1050
1	3 376 73	1200
1	3 376 83	1350
1	3 376 93	1500
1	3 377 03	1650
1	3 377 13	1800
1	3 377 23	1950
1	3 377 33	2100
1	3 377 43	2250

Pack	Cat.Nos	Glass doors for XL ³ S 630 enclosures
		Supplied with fixed handle Key barrel to be ordered separately 2 or 3 locking points (depending on door height)
		16 modules wide For cabinets with faceplate height (mm)
1	3 377 51	750
1	3 377 61	900
1	3 377 71	1050
1	3 377 81	1200
1	3 377 91	1350
1	3 378 01	1500
1	3 378 11	1650
1	3 378 21	1800
1	3 378 31	1950
1	3 378 41	2100
1	3 378 51	2250
		24 modules wide
1	3 377 52	750
1	3 377 62	900
1	3 377 72	1050
1	3 377 82	1200
1	3 377 92	1350
1	3 378 02	1500
1	3 378 12	1650
1	3 378 22	1800
1	3 378 32	1950
1	3 378 42	2100
1	3 378 52	2250
		36 modules wide
1	3 377 53	750
1	3 377 63	900
1	3 377 73	1050
1	3 377 83	1200
1	3 377 93	1350
1	3 378 03	1500
1	3 378 13	1650
1	3 378 23	1800
1	3 378 33	1950
1	3 378 43	2100
1	3 378 53	2250



XL³ S 630

equipment



3 376 80



3 378 82



3 379 52



3 382 00



3 382 03

Pack	Cat.Nos	Metal doors for XL ³ S 630 cable sleeves
		Supplied with fixed handle Key barrel to be ordered separately 2 or 3 locking points (depending on door height) For cable sleeves with faceplate height (mm)
1	3 376 40	750
1	3 376 50	900
1	3 376 60	1050
1	3 376 70	1200
1	3 376 80	1350
1	3 376 90	1500
1	3 377 00	1650
1	3 377 10	1800
1	3 377 20	1950
1	3 377 30	2100
1	3 377 40	2250

Pack	Cat.Nos	Replacement handles for doors
1	3 397 11	For XL ³ S 630 with faceplate height 750 to 1200 mm
1	3 397 12	For XL ³ S 630 with faceplate height 1350 to 2250 mm
1	3 397 16	Locking handle no. 405 for XL ³ S 630 with faceplate height 750 to 1200 mm Supplied with a set of 2 keys
1	3 397 17	Locking handle no. 405 for XL ³ S 630 with faceplate height 1350 to 2250 mm Supplied with a set of 2 keys

Pack	Cat.Nos	Faceplate for cable sleeves
		For external cable sleeves For cable sleeves with faceplate height (mm)
1	3 378 82	750
1	3 378 84	900
1	3 378 86	1050
1	3 378 88	1200
1	3 378 90	1350
1	3 378 92	1500
1	3 378 94	1650
1	3 378 96	1800
1	3 378 98	1950
1	3 379 00	2100
1	3 379 02	2250
		For internal cable sleeves
1	3 379 12	750
1	3 379 13	900
1	3 379 14	1050
1	3 379 15	1200
1	3 379 16	1350
1	3 379 17	1500
1	3 379 18	1650
1	3 379 19	1800
1	3 379 20	1950
1	3 379 21	2100
1	3 379 22	2250

Pack	Cat.Nos	Wall mounting
1	3 379 52	Set of 4 lugs for wall mounting

Pack	Cat.Nos	Functional uprights for external cable sleeves
		For fixing equipment in external cable sleeves For cable sleeves with faceplate height (mm)
1	3 379 86	750
1	3 379 87	900
1	3 379 88	1050
1	3 379 89	1200
1	3 379 90	1350
1	3 379 91	1500
1	3 379 92	1650
1	3 379 93	1800
1	3 379 94	1950
1	3 379 95	2100
1	3 379 96	2250

Pack	Cat.Nos	Plinths for XL ³ S 630 and 4000 enclosures
		Height 100 mm
1	3 382 00	Corner pieces for plinth Set of 4 corner pieces
		Finishing panel for plinth Set of 2 plates Length (mm)
1	3 382 05	300
1	3 382 01	350
1	3 382 02	450
1	3 382 03	600
1	3 382 04	800

Pack	Cat.Nos	Joining kits
		For connecting two enclosures
1	3 379 50	Joining screws for XL ³ S 630 and 4000 enclosures
1	3 379 49	Joining plates for XL ³ S 630 and 4000 enclosures (to be used to strengthen joining)

Pack	Cat.Nos	Seal for IP 43 protection
1	3 379 51	Supplied ready to use for XL ³ S 630 and 4000 enclosures

Pack	Cat.Nos	IP 30 finishing kits
		Set of 2 finishing pieces Allow 1 horizontal kit and 1 vertical kit per enclosure
		Finishing kits - vertical mounting For enclosures with faceplate height (mm)
1	3 379 60	750
1	3 379 61	900
1	3 379 62	1050
1	3 379 63	1200
1	3 379 64	1350
1	3 379 65	1500
1	3 379 66	1650
1	3 379 67	1800
1	3 379 68	1950
1	3 379 69	2100
1	3 379 70	2250

Pack	Cat.Nos	Finishing kits - horizontal mounting
		For 16-module enclosures
1	3 379 72	For 24-module enclosures
1	3 379 73	For 36-module enclosures
1	3 379 74	For cable sleeves

XL³ S 630 - equipment for mounting modular devices and DPX³ on a rail




Pack	Cat.Nos	3-position rails
1	3 382 20	Used for mounting modular devices or DPX ³ 160/250 equipped with adaptors for rail
1	3 382 23	For 16-module enclosure
1	3 382 26	For 24-module enclosure
1	3 382 26	For 36-module enclosure
Rail height spacer		
1	3 382 40	Used to combine modular devices and DPX ³ 160/250 on the same rail
1	3 382 41	Used to combine modular devices and DRX on the same rail
1	3 382 42	Used to combine DRX and DPX ³ 160/250 on the same rail
Adaptors for mounting DPX³ 160 and 250 on a rail		
1	4 210 71	Used to mount DPX ³ on a rail
1	4 210 73	For DPX ³ 160 without side motor-driven handle
1	4 210 68	For DPX ³ 160 with e.l.c.b without side motor-driven handle
1	4 210 68	For all DPX ³ 160 devices with side motor-driven handle
1	4 210 72	For DPX ³ 250 without side motor-driven handle
1	4 210 74	For DPX ³ 250 with e.l.c.bs without side motor-driven handle
1	4 210 69	For all DPX ³ 250 devices with side motor-driven handle
Window faceplates		
		Fixed with locking clips, 1/4 turn screws or screws
Height 150 mm for modular devices		
1	3 382 51	For 16-module enclosure
1	3 382 52	For 24-module enclosure
1	3 382 53	For 36-module enclosure
Height 300 mm for DPX³ 160/250 and DPX-IS 250		
1	3 382 71	For 16-module enclosure
1	3 382 72	For 24-module enclosure
1	3 382 73	For 36-module enclosure
Height 400 mm for DPX³ 250 with e.l.c.b and terminal shields		
1	3 382 81	For 16-module enclosure
1	3 382 82	For 24-module enclosure
1	3 382 83	For 36-module enclosure

XL³ S 630 equipment for mounting DRX 125 HP on a plate




Pack	Cat.Nos	Fixing plates for DRX 125 HP on side uprights
Horizontal mounting		
1	3 385 00	For 16-module enclosure
1	3 385 03	For 24-module enclosure
1	3 385 06	For 36-module enclosure
Vertical mounting		
1	3 385 21	For 16-module enclosure
1	3 385 23	For 24-module enclosure
1	3 385 26	For 36-module enclosure
Faceplates for DPX³ 160/250 and DRX 125 HP/250 HP - horizontal mounting		
		Fixed with locking clips, 1/4 turn screws or screws
DPX³ 160 - DRX 125 HP		
1	3 383 53	For 24-module enclosure
1	3 383 56	For 36-module enclosure
Window faceplates		
		Fixed with locking clips, 1/4 turn screws or screws
Height 200 mm for DRX 125 HP and Vistop up to 160 A		
1	3 382 61	For 16-module enclosure
1	3 382 62	For 24-module enclosure
1	3 382 63	For 36-module enclosure




XL³ S 630

equipment for mounting DPX³ 160/250 on a plate

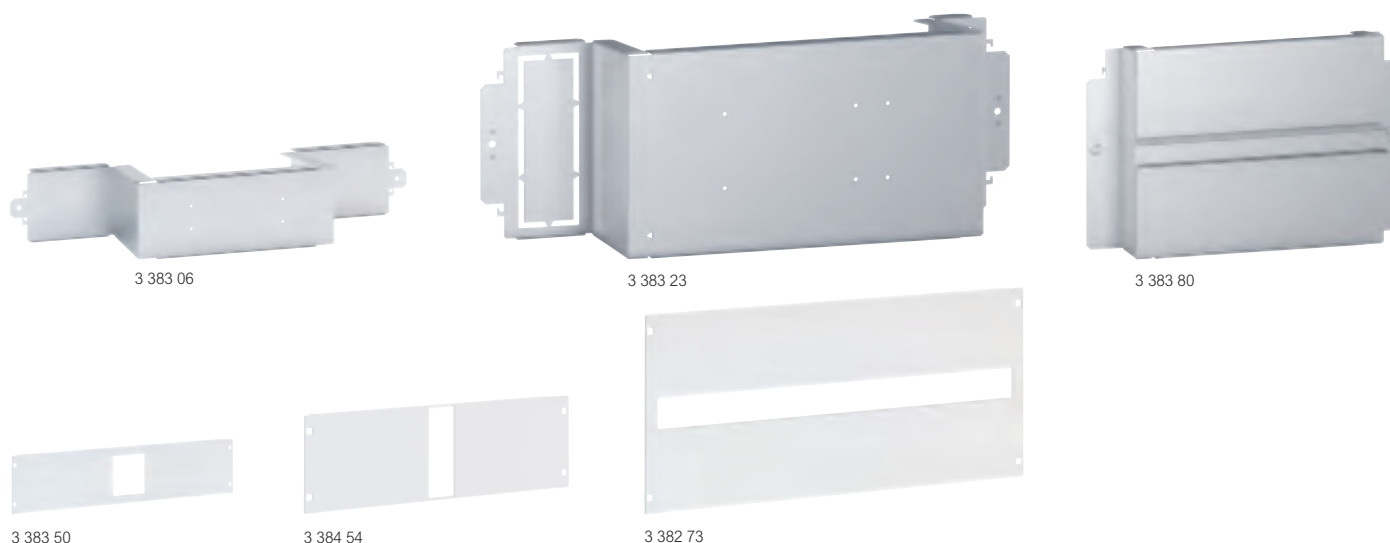

Pack	Cat.Nos		
	3P	4P	
1	3 383 00	3 383 01	DPX³ 160
1	3 383 03	3 383 04	For 16-module enclosure
1	3 383 06	3 383 07	For 24-module enclosure
1	3 384 00	3 384 01	DPX³ 250
1	3 384 03	3 384 04	For 16-module enclosure
1	3 384 06	3 384 07	For 24-module enclosure
1	3P/4P	3 383 20	Reduced height fixing plates for DPX³ 160/250 - horizontal mounting
	3P	4P	
1	3 383 23	3 383 24	DPX³ 160
1	3 383 26	3 383 27	For 16-module enclosure
	4P with e.l.c.b		
1	3 383 21		For 24-module enclosure
1	3 383 25		For 36-module enclosure
1	3 383 28		
	3P/4P		
1	3 384 20		DPX³ 250
	3P	4P	
1	3 384 23	3 384 24	For 16-module enclosure
1	3 384 26	3 384 27	For 24-module enclosure
	4P with e.l.c.b		
1	3 384 21		For 36-module enclosure
1	3 384 25		
1	3 384 28		
	3P/4P		
1	3 383 80		DPX³ 160/250 with rotary handle
1	3 383 81		For 16-module enclosure
1	3 383 82		For 24-module enclosure

Pack	Cat.Nos		
	3P	4P	
1	3 383 50	3 383 51	Faceplates for DPX³ 160/250 and DRX 125 HP/250 HP - horizontal mounting
1	3 383 53	3 383 54	Fixed with locking clips, 1/4 turn screws or screws
1	3 383 56	3 383 57	
1	3 384 50	3 384 51	DPX³ 160 - DRX 125 HP
1	3 384 53	3 384 54	For 16-module enclosure
1	3 384 56	3 384 57	For 24-module enclosure
1	3 384 50	3 384 51	DPX³ 250 - DRX 250 HP
1	3 384 53	3 384 54	For 16-module enclosure
1	3 384 56	3 384 57	For 24-module enclosure
			Faceplates for DPX³ 160/250 and DRX 250 HP - vertical mounting
			Fixed with locking clips, 1/4 turn screws or screws
1	3 382 71		Height 300 mm
1	3 382 72		For 16-module enclosure
1	3 382 73		For 24-module enclosure



XL³ S 630

equipment for mounting DRX/DPX³ 250 HP on a plate



3 386 03



3 386 01




3 386 56

Pack	Cat.Nos	Reduced height fixing plates for DRX/DPX ³ 250 HP - horizontal mounting
1	3 386 00	For 16-module enclosure
1	3 386 03	For 24-module enclosure
1	3 386 06	For 36-module enclosure


Pack	Cat.Nos	Fixing plates for DRX/DPX ³ 250 HP - horizontal mounting
1	3 386 01	For 16-module enclosure
1	3 386 04	For 24-module enclosure
1	3 386 07	For 36-module enclosure

Pack	Cat.Nos	Fixing plates for DRX/DPX ³ 250 HP - vertical mounting
1	3 386 20	For 16-module enclosure
1	3 386 23	For 24-module enclosure
1	3 386 26	For 36-module enclosure
1	3 386 21	For 16-module enclosure
1	3 386 24	For 24-module enclosure
1	3 386 27	For 36-module enclosure



Pack	Cat.Nos	Reduced height faceplates for DPX ³ 250 HP - horizontal mounting
1	3 386 50	For 16-module enclosure
1	3 386 53	For 24-module enclosure
1	3 386 56	For 36-module enclosure



Pack	Cat.Nos	Faceplates for DPX ³ 250 HP - horizontal mounting
1	3 386 51	For 16-module enclosure
1	3 386 54	For 24-module enclosure
1	3 386 57	For 36-module enclosure



Pack	Cat.Nos	Faceplates for DPX ³ 250 HP - vertical mounting
1	3 386 70	For 16-module enclosure
1	3 386 73	For 24-module enclosure
1	3 386 76	For 36-module enclosure
1	3 386 71	For 16-module enclosure
1	3 386 74	For 24-module enclosure
1	3 386 77	For 36-module enclosure



XL³ S 630

equipment for mounting DPX-IS 250 on a plate



3 389 20




3 382 73


Pack	Cat.Nos	Fixing plates for DPX-IS 250 - horizontal mounting
1	3 389 02	For 24-module enclosure
1	3 389 04	For 36-module enclosure

Pack	Cat.Nos	Fixing plates for DPX-IS 250 - vertical mounting
1	3 389 20	For 16-module enclosure
1	3 389 22	For 24-module enclosure
1	3 389 24	For 36-module enclosure

Pack	Cat.Nos	Faceplates for DPX-IS 250 - horizontal mounting
1	3 389 42	For 24-module enclosure
1	3 389 44	For 36-module enclosure



Pack	Cat.Nos	Faceplates for DPX-IS 250 - vertical mounting
1	3 382 71	For 16-module enclosure
1	3 382 72	For 24-module enclosure
1	3 382 73	For 36-module enclosure



XL³ S 630

equipment for mounting DPX-IS 630 on a plate




Pack	Cat.Nos	Fixing plates for DPX-IS 630 - horizontal mounting
1	3 390 02	For 24-module enclosure
1	3 390 14	For 36-module enclosure

Pack	Cat.Nos	Fixing plates for DPX-IS 630 - vertical mounting
1	3P/4P 3 390 20	For 16-module enclosure
1	3 390 22	For 24-module enclosure
1	3 390 24	For 36-module enclosure

Pack	Cat.Nos	Faceplates for DPX-IS 630 - horizontal mounting
1	3P/4P 3 390 41	Fixed with locking clips, 1/4 turn screws or screws For 24-module enclosure
1	3 390 43	For 36-module enclosure

Pack	Cat.Nos	Faceplates for DPX-IS 630 - vertical mounting
1	3P/4P 3 390 50	Fixed with locking clips, 1/4 turn screws or screws For 16-module enclosure
1	3 390 52	For 24-module enclosure
1	3 390 54	For 36-module enclosure



XL³ S 630

equipment for mounting DCX-M on a plate



Pack	Cat.Nos	Fixing plates for DCX-M - vertical mounting
1	3 390 60	For DCX-M size 1 - up to 63 A For 24-module enclosure
1	3 390 62	For DCX-M size 2 - up to 160 A For 24-module enclosure
1	3 390 64	For DCX-M size 3 - up to 400 A For 24-module enclosure
1	3 390 66	For DCX-M size 4 - up to 630 A For 24-module enclosure

Pack	Cat.Nos	Faceplates for DCX-M - vertical mounting
1	3 390 61	Fixed with locking clips, 1/4 turn screws or screws For DCX-M size 1 - up to 63 A For 24-module enclosure
1	3 390 63	For DCX-M size 2 - up to 160 A For 24-module enclosure
1	3 390 65	For DCX-M size 3 - up to 400 A For 24-module enclosure
1	3 390 67	For DCX-M size 4 - up to 630 A For 24-module enclosure

XL³ S 630

equipment for mounting SPX and SPX-D on busbars or plate



Pack Cat.Nos Fixing brackets for SPX insulating supports

1	3 392 50	Used to fix insulating supports Cat.No 6 052 46 for SPX on a busbar For SPX 000 to SPX 3 Cat.Nos 6 052 01/03/05/07/09
---	----------	---

Fixing plates for SPX - vertical mounting

For SPX 000 and 00
For SPX Cat.Nos 6 052 00/02

1	3 392 60	For 16-module enclosure
1	3 392 61	For 24-module enclosure
1	3 392 62	For 36-module enclosure

For SPX 1 For SPX Cat.No 6 052 04		
1	3 393 20	For 16-module enclosure
1	3 393 21	For 24-module enclosure
1	3 393 22	For 36-module enclosure


For SPX 2 For SPX Cat.No 6 052 06		
1	3 393 50	For 16-module enclosure
1	3 393 51	For 24-module enclosure
1	3 393 52	For 36-module enclosure

For SPX 3 For SPX Cat.No 6 052 08		
1	3 393 81	For 24-module enclosure
1	3 393 82	For 36-module enclosure


Faceplates for SPX - vertical mounting

Fixed with locking clips, 1/4 turn screws or screws


For SPX 000		
1	3 392 70	For 16-module enclosure
1	3 392 71	For 24-module enclosure
1	3 392 72	For 36-module enclosure




For SPX 00		
1	3 393 00	For 16-module enclosure
1	3 393 01	For 24-module enclosure
1	3 393 02	For 36-module enclosure



For SPX 1		
1	3 393 30	For 16-module enclosure
1	3 393 31	For 24-module enclosure
1	3 393 32	For 36-module enclosure



For SPX 2		
1	3 393 60	For 16-module enclosure
1	3 393 61	For 24-module enclosure
1	3 393 62	For 36-module enclosure




For SPX 3		
1	3 393 91	For 24-module enclosure
1	3 393 92	For 36-module enclosure




Pack Cat.Nos Faceplates for SPX - horizontal mounting

Fixed with locking clips, 1/4 turn screws or screws

For SPX 2 For SPX Cat.No 6 052 06		
1	3 393 65	For 24-module enclosure
1	3 393 66	For 36-module enclosure



For SPX 3 For SPX Cat.No 6 052 08		
1	3 393 95	For 24-module enclosure
1	3 393 96	For 36-module enclosure




Fixing plates for SPX-D 160 - vertical mounting

3P/4P		
1	3 394 60	For 16-module enclosure
1	3 394 61	For 24-module enclosure
1	3 394 62	For 36-module enclosure

Faceplates for SPX-D 160 - vertical mounting

Fixed with locking clips, 1/4 turn screws or screws

3P/4P		
1	3 394 71	For 16-module enclosure
1	3 394 73	For 24-module enclosure
1	3 394 75	For 36-module enclosure



XL³ S 630

universal plates and solid metal faceplates



Pack	Cat.Nos	Universal rails
1	3 382 43	For 16-module enclosure
1	3 382 44	For 24-module enclosure
1	3 382 45	For 36-module enclosure
Solid universal plates		
For 16-module enclosures		
		Height (mm)
1	3 395 40	200
1	3 395 41	300
1	3 395 42	400
1	3 395 43	600
For 24-module enclosures		
1	3 395 44	200
1	3 395 45	300
1	3 395 46	400
1	3 395 47	600
For 36-module enclosures		
1	3 395 48	200
1	3 395 49	300
1	3 395 50	400
1	3 395 51	600
Perforated universal plates		
For 16-module enclosures		
		Height (mm)
1	3 395 60	200
1	3 395 61	300
1	3 395 62	400
1	3 395 63	600
For 24-module enclosures		
1	3 395 64	200
1	3 395 65	300
1	3 395 66	400
1	3 395 67	600
For 36-module enclosures		
1	3 395 68	200
1	3 395 69	300
1	3 395 70	400
1	3 395 71	600
Universal support for cable sleeves		
1	3 397 51	Vertical sloping support for cable sleeve

Pack	Cat.Nos	Solid metal faceplates
		Fixed with locking clips, 1/4 turn screws or screws
Height 50 mm		
		For enclosures (modules) Faceplate usable height (mm)
1	3 395 92	16 49
1	3 395 95	24 49
1	3 395 98	36 49
Height 100 mm		
1	3 395 93	16 99
1	3 395 96	24 99
1	3 395 99	36 99
Height 150 mm		
1	3 395 94	16 149
1	3 395 97	24 149
1	3 396 00	36 149
Height 200 mm		
1	3 395 80	16 199
1	3 395 84	24 199
1	3 395 88	36 199
Height 300 mm		
1	3 395 81	16 299
1	3 395 85	24 299
1	3 395 89	36 299
Height 400 mm		
1	3 395 82	16 399
1	3 395 86	24 399
1	3 395 90	36 399
Height 600 mm		
1	3 395 83	16 599
1	3 395 87	24 599
1	3 395 91	36 599
Perforated faceplates for ventilation		
		Fixed with locking clips, 1/4 turn screws or screws
Height 150 mm		
1	3 390 80	For 16-module enclosure
1	3 390 81	For 24-module enclosure
1	3 390 82	For 36-module enclosure
Height 200 mm		
1	3 390 83	For 16-module enclosure
1	3 390 84	For 24-module enclosure
1	3 390 85	For 36-module enclosure
Fixing accessories for faceplates		
1	3 397 00	Set of 100 locking clips for quick fixing
1	3 397 01	Set of 100 1/4 turn screws
1	3 397 02	Set of 100 screws

XL³ S 630

busbar supports and accessories



Technical characteristics **see e-catalogue**
Busbar supports selection chart **p. 58 to 63**


Pack	Cat.Nos	Busbar supports
1	3 399 00	For copper busbars ≤ 400 A
1	3 399 01	Insulating support for flat copper busbars 18 x 4, 25 x 4, 25 x 5 and 32 x 5 mm in staggered position
1	3 399 02	Insulating support for flat copper bars 18 x 4, 25 x 4 and 32 x 5 mm in aligned position
1	3 399 03	For aluminium busbars ≤ 630 A
1	3 399 04	Compatible with C-section aluminium bars Cat.Nos 4 044 30/31/32 (p. 55)
1	3 399 05	Insulating support for aluminium bars in staggered position
1	3 399 06	Insulating lug support for aluminium bars in staggered position
1	3 399 07	Insulating support for aluminium bars in aligned position. Can be fixed on the enclosure functional uprights with the help of crosspieces
1	3 399 08	Cat.Nos 3 379 80/81/82 (to be ordered separately)
1	3 399 09	Insulating lug support for aluminium bars in aligned position. Can be fixed on the enclosure functional uprights with the help of crosspieces
1	3 399 10	Cat.Nos 3 379 80/81/82 (to be ordered separately)
1	3 399 11	For copper busbars ≤ 800 A
1	3 399 12	Insulating support for flat copper bars 18 x 4, 25 x 5, 32 x 5, 50 x 5 and 63 x 5 mm in sloping position
1	3 399 13	When installed in XL ³ S 630 enclosures I ≤ 630 A
1	3 379 79	Crosspieces
1	3 397 37	For external cable sleeves
1	3 379 80	For internal cable sleeves
1	3 379 81	For 16-module width enclosure/cable sleeve width: 450 mm
1	3 379 82	For 24-module width enclosure
1	3 379 83	For 36-module width enclosure
1	3 379 84	For depthwise installation (compatible with all XL ³ S 630 enclosures)
1	0 373 84	Plate for 630 A aluminium busbar
1	0 373 85	Connection plate for aluminium busbar
1	3 397 21	Earthing bar supports
1	3 397 22	For XL ³ S 630 and 4000 enclosures
1	0 373 01	Connection of protective conductors
1	3 397 57	Additional brass bar
1	3 397 58	For protective conductor. Fits onto functional uprights using the lugs supplied
1	3 397 59	For 24-module width enclosure
1	3 397 60	For 36-module width enclosure
1	3 397 53	Equipotential link conductor
1	3 397 54	Length 350 mm. Cross-section 6 mm ²
20	0 016 60	White RAL 9003 blanking plates
20	3 397 54	5 modules, separable into modules or half-modules
20	3 397 55	24 modules, untapped blanking panel which can be cut as required
10	3 397 55	Clip-on holders for self-adhesive labels
10	3 397 56	24 modules
10	3 397 56	36 modules

Pack	Cat.Nos	Fixing supports for Lina 25 ducting
1	3 397 58	Set of 2 supports
1	0 205 82	Fit directly onto functional uprights
1	0 205 82	Lifting rings
1	0 205 82	Set of 4
1	0 205 82	Maximum load of 340 kg per ring
1	0 365 80	Self-adhesive document holders for plans
1	0 365 81	Open - RAL 7035
20	0 365 80	External dimensions
20	0 365 81	Height (mm) Width (mm)
1	0 365 82	235 340
10	0 097 99	165 260
1	0 365 82	Internal dimensions
10	0 097 99	Height (mm) Width (mm) Depth (mm)
10	0 097 99	200 310 18
10	0 097 99	130 230 18
10	0 097 99	Closed - RAL 7035
10	0 097 99	Rigid, plastic, IP 50
10	0 097 99	Int. dimensions: 324 x 120 x 18 mm
10	0 097 99	Transparent
10	0 097 99	Soft plastic, A4 - 305 x 220 mm
1	3 379 54	Cable gland plates
1	3 379 55	Cable gland plates with foam seal
1	3 379 56	For cable sleeve
1	3 379 57	For 16-module width enclosure
1	3 379 58	For 24-module width enclosure
1	3 379 59	For 36-module width enclosure
1	0 364 94	IP 55 Cabstop plates
1	0 364 95	Cable gland plates
1	0 364 96	Cable entries consisting of a cable clamp providing mechanical strength, and elastomer areas ensuring a tight seal.
1	0 364 97	Can be pierced directly with the cable (no tool required). Fit the cable perfectly
1	0 364 98	Cable can be replaced
1	0 364 99	Flame-retardant polypropylene RAL 7035
1	0 364 99	2 mounting options:
1	0 364 99	- directly on cabinet cable entry plates
1	0 364 99	- on even surface with kit Cat.No 0 364 98
1	0 364 99	Supplied with:
1	0 364 99	- locking caps which can be used to block up a pierced entry and guarantee IP 55 protection
1	0 364 99	- cable release tools
1	0 364 94	Number of entries
1	0 364 95	Ø5 to 14 (mm)
1	0 364 96	Number of entries
1	0 364 97	Ø14 to 24 (mm)
1	0 364 98	Number of spare entries
1	0 364 99	Direct mounting on cable entry plates on Atlantic cabinets width (mm)
1	0 364 99	300
1	0 364 99	400
1	0 364 99	500-1000
1	0 364 99	600-800-1200
1	0 364 98	Mounting kit
1	0 364 98	Kit for Cabstop plates
1	0 364 98	For mounting 2 Cabstop plates:
1	0 364 98	Cat.Nos 0 364 94 or 95 and 0 364 96 or 97 (above)
1	0 364 98	Supplied with insulating screws. IP 55 maintained

XL³ S 630


technical characteristics

Installation principle

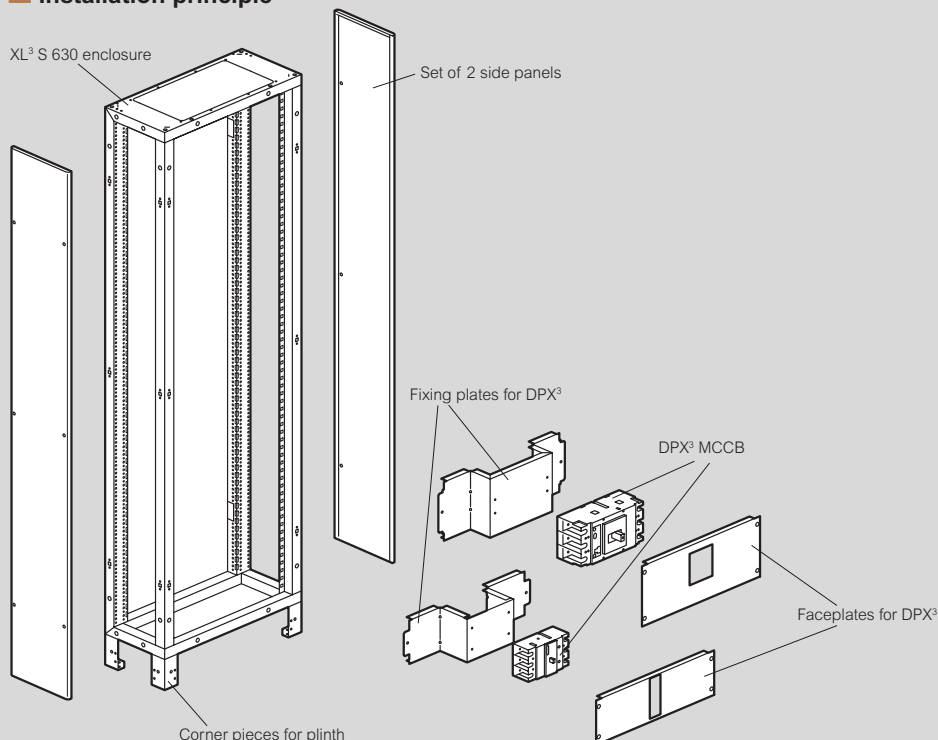

Dimensions

Enclosures and external cable sleeves

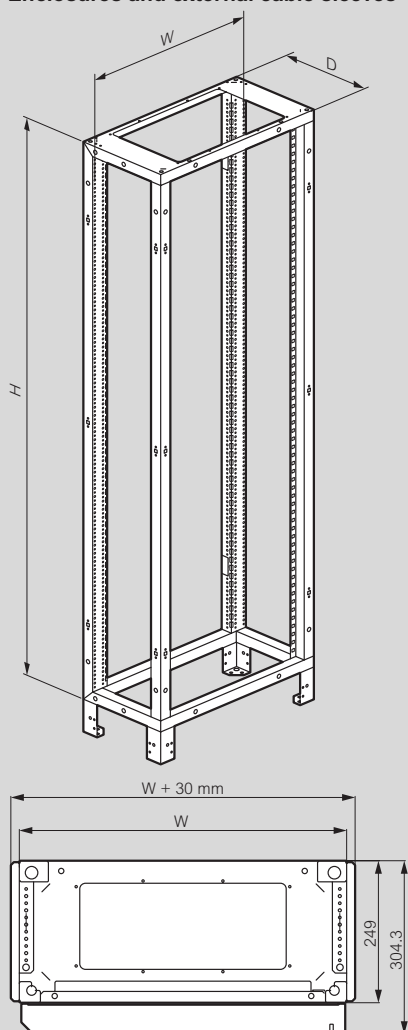

16-module enclosures

Cat.Nos	External dimensions (mm)		
	W	H	D
3 375 21	424	824	249
3 375 31	424	974	249
3 375 41	424	1124	249
3 375 51	424	1274	249
3 375 61	424	1424	249
3 375 71	424	1574	249
3 375 81	424	1724	249
3 375 91	424	1874	249
3 376 01	424	2024	249
3 376 11	424	2174	249
3 376 21	424	2324	249

24-module enclosures

Cat.Nos	External dimensions (mm)		
	W	H	D
3 375 22	574	824	249
3 375 32	574	974	249
3 375 42	574	1124	249
3 375 52	574	1274	249
3 375 62	574	1424	249
3 375 72	574	1574	249
3 375 82	574	1724	249
3 375 92	574	1874	249
3 376 02	574	2024	249
3 376 12	574	2174	249
3 376 22	574	2324	249

36-module enclosures

Cat.Nos	External dimensions (mm)		
	W	H	D
3 375 23	774	824	249
3 375 33	774	974	249
3 375 43	774	1124	249
3 375 53	774	1274	249
3 375 63	774	1424	249
3 375 73	774	1574	249
3 375 83	774	1724	249
3 375 93	774	1874	249
3 376 03	774	2024	249
3 376 13	774	2174	249
3 376 23	774	2324	249

External cable sleeves

Cat.Nos	External dimensions (mm)		
	W	H	D
3 375 20	324	824	249
3 375 30	324	974	249
3 375 40	324	1124	249
3 375 50	324	1274	249
3 375 60	324	1424	249
3 375 70	324	1574	249
3 375 80	324	1724	249
3 375 90	324	1874	249
3 376 00	324	2024	249
3 376 10	324	2174	249
3 376 20	324	2324	249

DEVICE	ENCLOSURE	POSITION	CONFIGURATION	
	FIXING ON RAIL			
MCBs	16 modules wide	Vertical	-	
	24 modules wide	Vertical	-	
	36 modules wide	Vertical	-	
DPX ³ 160	16 modules wide	Vertical	Without side motor-driven handle	
		Vertical	With e.l.c.b without side motor-driven handle	
		Vertical	With side motor-driven handle	
	24 modules wide	Vertical	Without side motor-driven handle	
		Vertical	With e.l.c.b without side motor-driven handle	
		Vertical	With side motor-driven handle	
	36 modules wide	Vertical	Without side motor-driven handle	
		Vertical	With e.l.c.b without side motor-driven handle	
		Vertical	With side motor-driven handle	
DPX ³ 250	16 modules wide	Vertical	Without side motor-driven handle	
		Vertical	With e.l.c.b without side motor-driven handle	
		Vertical	With side motor-driven handle	
		Vertical	With e.l.c.b and terminal shield	
	24 modules wide	Vertical	Without side motor-driven handle	
		Vertical	With e.l.c.b without side motor-driven handle	
		Vertical	With side motor-driven handle	
		Vertical	With e.l.c.b and terminal shield	
	36 modules wide	Vertical	Without side motor-driven handle	
		Vertical	With e.l.c.b without side motor-driven handle	
		Vertical	With side motor-driven handle	
		Vertical	With e.l.c.b and terminal shield	
DRX 125 HP	FIXING ON PLATE			
	16 modules wide	Horizontal/side uprights	3P	
			4P	
	24 modules wide	Horizontal/side uprights	3P	
			4P	
	36 modules wide	Horizontal/side uprights	3P	
			4P	
	16 modules wide	Horizontal/central upright	3P	
			4P	
	24 modules wide	Horizontal/central upright	3P	
			4P	
	36 modules wide	Horizontal/central upright	3P	
			4P	
	16 modules wide	Vertical/side uprights	3P/4P	
			3P	
24 modules wide	Vertical/side uprights	4P		
		3P		
36 modules wide	Vertical/side uprights	4P		
		3P		
DPX ³ 160	16 modules wide	Horizontal/side uprights	3P	
			4P with or without e.l.c.b	
	24 modules wide	Horizontal/side uprights	3P	
			4P with or without e.l.c.b	
	36 modules wide	Horizontal/side uprights	3P	
			4P with or without e.l.c.b	
	16 modules wide	Horizontal/central upright	3P	
			4P with or without e.l.c.b	
	24 modules wide	Horizontal/central upright	3P	
			4P with or without e.l.c.b	
	36 modules wide	Horizontal/central upright	3P	
			4P with or without e.l.c.b	
	16 modules wide	Vertical	3P or 4P	
			4P with e.l.c.b	
			3P/4P with rotary handle	
24 modules wide	Vertical	3P		
		4P		
		4P with e.l.c.b		
36 modules wide	Vertical	3P/4P with rotary handle		
		3P		
		4P		
36 modules wide	Vertical	4P with e.l.c.b		
		3P/4P with rotary handle		

	FIXING DEVICES			FACEPLATES	
	RAIL	PLATE	BRACKETS	HEIGHT (mm)	
	FIXING ON RAIL				
	3 382 20	-	-	150	3 382 51
	3 382 23	-	-	150	3 382 52
	3 382 26	-	-	150	3 382 53
	3 382 20 + 4 210 71	-	-	300	3 382 71
	3 382 20 + 4 210 73	-	-	300	3 382 71
	3 382 20 + 4 210 68	-	-	300	3 382 71
	3 382 23 + 4 210 71	-	-	300	3 382 72
	3 382 23 + 4 210 73	-	-	300	3 382 72
	3 382 23 + 4 210 68	-	-	300	3 382 72
	3 382 26 + 4 210 71	-	-	300	3 382 73
	3 382 26 + 4 210 73	-	-	300	3 382 73
	3 382 26 + 4 210 68	-	-	300	3 382 73
	3 382 20 + 4 210 72	-	-	300	3 382 71
	3 382 20 + 4 210 74	-	-	300	3 382 71
	3 382 20 + 4 210 69	-	-	300	3 382 71
	3 382 20 + 4 210 74	-	-	400	3 382 81
	3 382 23 + 4 210 72	-	-	300	3 382 72
	3 382 23 + 4 210 74	-	-	300	3 382 72
	3 382 23 + 4 210 69	-	-	300	3 382 72
	3 382 23 + 4 210 74	-	-	400	3 382 82
	3 382 26 + 4 210 72	-	-	300	3 382 73
	3 382 26 + 4 210 74	-	-	300	3 382 73
	3 382 26 + 4 210 69	-	-	300	3 382 73
	3 382 26 + 4 210 74	-	-	400	3 382 83
	FIXING ON PLATE				
	-	3 385 00	-	150	3 383 51
	-	3 385 01	-	150	3 383 51
	-	3 385 03	-	150	3 383 54
	-	3 385 04	-	150	3 383 54
	-	3 385 06	-	150	3 383 57
	-	3 385 07	-	150	3 383 57
	-	3 396 23	-	100	3 383 50
	-	3 396 15	-	150	3 383 51
	-	3 396 23	-	100	3 383 53
	-	3 396 15	-	150	3 383 54
	-	3 396 23	-	100	3 383 56
	-	3 396 15	-	150	3 383 57
	-	3 385 21	-	200	3 382 61
	-	3 385 23	-	200	3 382 62
	-	3 385 24	-	200	3 382 62
	-	3 385 26	-	200	3 382 63
	-	3 385 27	-	200	3 382 63
	-	3 383 00	-	150	3 383 51
	-	3 383 01	-	150	3 383 51
	-	3 383 04	-	150	3 383 54
	-	3 383 04	-	150	3 383 54
	-	3 383 07	-	150	3 383 57
	-	3 383 07	-	150	3 383 57
	-	3 396 20	-	100	3 383 50
	-	3 396 10	-	150	3 383 51
	-	3 396 20	-	100	3 383 53
	-	3 396 10	-	150	3 383 54
	-	3 396 20	-	100	3 383 56
	-	3 396 10	-	150	3 383 57
	-	3 383 20	-	300	3 382 71
	-	3 383 21	-	300	3 382 71
	-	3 383 80	-	300	3 382 71
	-	3 383 23	-	300	3 382 72
	-	3 383 24	-	300	3 382 72
	-	3 383 25	-	300	3 382 72
	-	3 383 81	-	300	3 382 72
	-	3 383 26	-	300	3 382 73
	-	3 383 27	-	300	3 382 73
	-	3 383 28	-	300	3 382 73
	-	3 383 82	-	300	3 382 73

XL³ S 4000

selection chart (continued)

DEVICE	ENCLOSURE	POSITION	CONFIGURATION		
	FIXING ON PLATE				
DPX³ 250	16 modules wide	Horizontal/side uprights	3P 4P with or without e.l.c.b		
	24 modules wide	Horizontal/side uprights	3P 4P with or without e.l.c.b		
	36 modules wide	Horizontal/side uprights	3P 4P with or without e.l.c.b		
	16 modules wide	Horizontal/central upright	3P 4P with or without e.l.c.b		
	24 modules wide	Horizontal/central upright	3P 4P with or without e.l.c.b		
	36 modules wide	Horizontal/central upright	3P 4P with or without e.l.c.b		
	16 modules wide	Vertical	3P or 4P 4P with e.l.c.b 3P/4P with rotary handle		
	24 modules wide	Vertical	3P 4P 4P with e.l.c.b 3P/4P with rotary handle		
	36 modules wide	Vertical	3P 4P 4P with e.l.c.b 3P/4P with rotary handle		
	DRX 250 HP	16 modules wide	Horizontal/side uprights	3P 4P	
		24 modules wide	Horizontal/side uprights	3P 4P	
		36 modules wide	Horizontal/side uprights	3P 4P	
		16 modules wide	Horizontal/central upright	3P 4P	
		24 modules wide	Horizontal/central upright	3P 4P	
		36 modules wide	Horizontal/central upright	3P 4P	
		16 modules wide	Vertical	3P 4P	
		24 modules wide	Vertical	3P 4P	
		36 modules wide	Vertical	3P 4P	
DPX³ 250 HP		16 modules wide	Horizontal/side uprights	3P 4P with or without e.l.c.b	
		24 modules wide	Horizontal/side uprights	3P 4P with or without e.l.c.b	
		36 modules wide	Horizontal/side uprights	3P 4P with or without e.l.c.b	
	16 modules wide	Horizontal/central upright	3P 4P with or without e.l.c.b		
	24 modules wide	Horizontal/central upright	3P 4P with or without e.l.c.b		
	36 modules wide	Horizontal/central upright	3P 4P with or without e.l.c.b		
	16 modules wide	Vertical	3P 4P with or without e.l.c.b		
	24 modules wide	Vertical	3P 4P with or without e.l.c.b		
	36 modules wide	Vertical	3P 4P with or without e.l.c.b		

	FIXING DEVICES			FACEPLATES	
	RAIL	PLATE	BRACKETS	HEIGHT (MM)	
	FIXING ON PLATE				
-		3 384 00	-	150	3 384 50
-		3 384 01	-	200	3 384 51
-		3 384 03	-	150	3 384 53
-		3 384 04	-	200	3 384 54
-		3 384 06	-	150	3 384 56
-		3 384 07	-	200	3 384 57
-		3 396 21	-	150	3 384 50
-		3 396 11	-	200	3 384 51
-		3 396 21	-	150	3 384 53
-		3 396 11	-	200	3 384 54
-		3 396 21	-	150	3 384 56
-		3 396 11	-	200	3 384 57
-		3 384 20	-	300	3 382 71
-		3 384 21	-	300	3 382 71
-		3 383 80	-	300	3 382 71
-		3 384 23	-	300	3 382 72
-		3 384 24	-	300	3 382 72
-		3 384 25	-	300	3 382 72
-		3 383 81	-	300	3 382 72
-		3 384 26	-	300	3 382 73
-		3 384 27	-	300	3 382 73
-		3 384 28	-	300	3 382 73
-		3 383 82	-	300	3 382 73
-		3 386 00	-	150	3 384 50
-		3 386 01	-	200	3 384 51
-		3 386 03	-	150	3 384 53
-		3 386 04	-	200	3 384 54
-		3 386 06	-	150	3 384 56
-		3 386 07	-	200	3 384 57
-		3 396 24	-	150	3 384 50
-		3 396 16	-	200	3 384 51
-		3 396 24	-	150	3 384 53
-		3 396 16	-	200	3 384 54
-		3 396 24	-	150	3 384 56
-		3 396 16	-	200	3 384 57
-		3 386 20	-	300	3 382 71
-		3 386 21	-	300	3 382 71
-		3 386 23	-	300	3 382 72
-		3 386 24	-	300	3 382 72
-		3 386 26	-	300	3 382 73
-		3 386 27	-	300	3 382 73
-		3 386 00	-	150	3 386 50
-		3 386 01	-	200	3 386 51
-		3 386 03	-	150	3 386 53
-		3 386 04	-	200	3 386 54
-		3 386 06	-	150	3 386 56
-		3 386 07	-	200	3 386 57
-		3 396 24	-	150	3 386 50
-		3 396 16	-	200	3 386 51
-		3 396 24	-	150	3 386 53
-		3 396 16	-	200	3 386 54
-		3 396 24	-	150	3 386 56
-		3 396 16	-	200	3 386 57
-		3 386 20	-	300	3 386 70
-		3 386 21	-	300	3 386 71
-		3 386 23	-	300	3 386 73
-		3 386 24	-	300	3 386 74
-		3 386 26	-	300	3 386 76
-		3 386 27	-	300	3 386 77

XL³ S 4000

selection chart (continued)

DEVICE	ENCLOSURE	POSITION	CONFIGURATION	
DPX ³ 630	16 modules wide	Horizontal/side uprights	3P	
			3P or 4P without e.l.c.b	
	24 modules wide	Horizontal/side uprights	3P	
			3P or 4P without e.l.c.b	
	36 modules wide	Horizontal/side uprights	3P	
			3P or 4P without e.l.c.b	
	16 modules wide	Horizontal/central upright	4P with e.l.c.b	
			3P	
	24 modules wide	Horizontal/central upright	4P with or without e.l.c.b	
			3P	
	36 modules wide	Horizontal/central upright	4P with or without e.l.c.b	
			3P	
	16 modules wide	Vertical	4P without e.l.c.b	
			4P with e.l.c.b	
	24 modules wide	Vertical	3P/4P without e.l.c.b	
			4P with e.l.c.b	
	36 modules wide	Vertical	3P/4P with rotary handle	
			3P/4P with motor-driven handle	
DPX-IS 630	24 modules wide	Horizontal/side uprights	3P/4P without e.l.c.b	
	36 modules wide	Horizontal/side uprights	4P with e.l.c.b	
	16 modules wide	Horizontal/central upright	3P/4P with rotary handle	
	24 modules wide	Horizontal/central upright	3P/4P with motor-driven handle	
	36 modules wide	Horizontal/central upright	3P	
DPX ³ 1600	16 modules wide	Vertical	3P or 4P	
	24 modules wide	Vertical	3P or 4P	
	36 modules wide	Vertical	3P or 4P	
	24 modules wide	Vertical	3P	
	36 modules wide	Vertical	4P	
DPX-IS 1600	24 modules wide	Horizontal	3P	
	36 modules wide	Horizontal	4P	
	16 modules wide	Horizontal	3P	
	24 modules wide	Horizontal	4P	
	36 modules wide	Horizontal	3P/4P	
DCX-M SIZE 1 UP TO 63 A	24 modules wide	Vertical	3P/4P	
DCX-M SIZE 2 UP TO 160 A	24 modules wide	Vertical	-	
DCX-M SIZE 3 UP TO 400 A	24 modules wide	Vertical	-	
DCX-M SIZE 4 UP TO 800 A	24 modules wide	Vertical	-	
DCX-M SIZE 5 UP TO 1250 A	24 modules wide	Vertical	-	
DCX-M SIZE 6 UP TO 1600 A	36 modules wide	Vertical	-	

	FIXING DEVICES			FACEPLATES	
	RAIL	PLATE	BRACKETS	HEIGHT (MM)	
	FIXING ON PLATE				
	-	3 387 00	-	150	3 387 50
	-	3 387 01	-	200	3 387 51
	-	3 387 03	-	150	3 387 53
	-	3 387 04	-	200	3 387 54
	-	3 387 06	-	150	3 387 56
	-	3 387 07	-	200	3 387 57
	-	3 387 07	-	200	3 387 58
	-	3 396 22	-	150	3 387 50
	-	3 396 12	-	200	3 387 51
	-	3 396 22	-	150	3 387 53
	-	3 396 12	-	200	3 387 54
	-	3 396 22	-	150	3 387 56
	-	3 396 12	-	200	3 387 57
	-	3 396 12	-	200	3 387 58
	-	3 387 20	-	400	3 387 70
	-	3 387 21	-	600	3 387 71
	-	3 383 86	-	400	3 383 92
	-	3 383 89	-	400	3 383 92
	-	3 387 24	-	400	3 387 74
	-	3 387 25	-	600	3 387 75
	-	3 383 87	-	400	3 383 93
	-	3 383 90	-	400	3 383 93
	-	3 384 80	-	400	3 384 84
	-	3 384 82	-	400	3 384 84
	-	3 387 27	-	400	3 387 77
	-	3 387 28	-	600	3 387 78
	-	3 383 88	-	400	3 383 94
	-	3 383 91	-	400	3 383 94
	-	3 384 81	-	400	3 384 85
	-	3 384 83	-	400	3 384 85
	-	3 390 02	-	300	3 390 41
	-	3 390 14	-	300	3 390 43
	-	3 396 14	-	300	3 390 43
	-	3 390 20	-	400	3 390 50
	-	3 390 22	-	400	3 390 52
	-	3 390 24	-	400	3 390 54
	-	3 388 01	-	300	3 388 41
	-	3 388 02	-	400	3 388 42
	-	3 388 03	-	300	3 388 43
	-	3 388 04	-	400	3 388 44
	-	3 388 10	-	350	3 388 50
	-	3 388 12	-	350	3 388 52
	-	3 388 14	-	350	3 388 54
	-	3 388 01	-	300	3 388 61
	-	3 388 02	-	400	3 388 62
	-	3 388 03	-	300	3 388 63
	-	3 388 04	-	400	3 388 64
	-	3 388 10	-	350	3 388 70
	-	3 388 12	-	350	3 388 72
	-	3 388 14	-	350	3 388 74
	-	3 390 60	-	200	3 390 61
	-	3 390 62	-	200	3 390 63
	-	3 390 64	-	300	3 390 65
	-	3 390 66	-	400	3 390 67
	-	3 390 68	-	700	3 390 69
	-	3 390 70	-	600	3 390 71

XL³ S 4000

selection chart (continued)

DEVICE	ENCLOSURE	POSITION	CONFIGURATION	
	FIXING ON PLATE			
SPX 000	16 modules wide	Vertical	3P	
	24 modules wide	Vertical	3P	
	36 modules wide	Vertical	3P	
SPX 00	16 modules wide	Vertical	3P	
	24 modules wide	Vertical	3P	
	36 modules wide	Vertical	3P	
SPX 1	16 modules wide	Vertical	3P	
	24 modules wide	Vertical	3P	
	36 modules wide	Vertical	3P	
SPX 2	16 modules wide	Vertical	3P	
	24 modules wide	Vertical	3P	
	36 modules wide	Vertical	3P	
SPX 3	24 modules wide	Vertical	3P	
	36 modules wide	Vertical	3P	
SPX 000	FIXING ON BUSBARS			
	16 modules wide	Vertical	3P	
	24 modules wide	Vertical	3P	
	36 modules wide	Vertical	3P	
SPX 00	16 modules wide	Vertical	3P	
	24 modules wide	Vertical	3P	
	36 modules wide	Vertical	3P	
SPX 1	16 modules wide	Vertical	3P	
	24 modules wide	Vertical	3P	
	36 modules wide	Vertical	3P	
SPX 2	24 modules wide	Horizontal ⁽¹⁾	3P	
	36 modules wide	Horizontal ⁽²⁾	3P	
	16 modules wide	Vertical	3P	
	24 modules wide	Vertical/Horizontal ⁽¹⁾	3P	
	36 modules wide	Vertical/Horizontal ⁽²⁾	3P	
SPX 3	24 modules wide	Horizontal ⁽¹⁾	3P	
	36 modules wide	Horizontal ⁽²⁾	3P	
	24 modules wide	Vertical/Horizontal ⁽¹⁾	3P	
	36 modules wide	Vertical/Horizontal ⁽²⁾	3P	
SPX ³ -V	36 modules wide	Horizontal	-	
	24 modules wide	Vertical	-	
	36 modules wide	Vertical	-	
SPX-D 160	FIXING ON PLATE			
	16 modules wide	Vertical	3P/4P	
	24 modules wide	Vertical	3P/4P	
	36 modules wide	Vertical	3P/4P	
SPX-D 250	24 modules wide	Vertical	3P/4P	
	36 modules wide	Vertical	3P/4P	
SPX-D 400	24 modules wide	Vertical	3P/4P	
	36 modules wide	Vertical	3P/4P	
SPX-D 630	24 modules wide	Vertical	3P/4P	
	36 modules wide	Vertical	3P/4P	
DMX ³ SIZE 1600	16 modules wide	Fixed version	3P	
	24 modules wide	Fixed version	3P/4P	
	36 modules wide	Fixed version	3P/4P	
	16 modules wide	Draw-out version	3P	
	24 modules wide	Draw-out version	3P/4P	
	36 modules wide	Draw-out version	3P/4P	
DMX ³ SIZE 2500	24 modules wide	Fixed/draw-out version	3P/4P	
	36 modules wide	Fixed/draw-out version	3P/4P	
DMX ³ SIZE 4000	36 modules wide	Fixed/draw-out version	3P/4P	
DMX-SP SIZE 2500	24 modules wide	Fixed version	3P/4P	
	36 modules wide	Fixed version	3P/4P	
	16 modules wide	Draw-out version	3P/4P	
	24 modules wide	Draw-out version	3P/4P	

1: With crosspiece Cat.No 3 379 81
2: With crosspiece Cat.No 3 379 82

	FIXING DEVICES			FACEPLATES	
	RAIL	PLATE	BRACKETS	HEIGHT (MM)	
	FIXING ON PLATE				
	-	3 392 60	-	300	3 392 70
	-	3 392 61	-	300	3 392 71
	-	3 392 62	-	300	3 392 72
	-	3 392 60	-	300	3 393 00
	-	3 392 61	-	300	3 393 01
	-	3 392 62	-	300	3 393 02
	-	3 393 20	-	400	3 393 30
	-	3 393 21	-	400	3 393 31
	-	3 393 22	-	400	3 393 32
	-	3 393 50	-	400	3 393 60
	-	3 393 51	-	400	3 393 61
	-	3 393 52	-	400	3 393 62
	-	3 393 81	-	400	3 393 91
	-	3 393 82	-	400	3 393 92
	FIXING ON BUSBARS				
	-	-	3 392 50	300	3 392 70
	-	-	3 392 50	300	3 392 71
	-	-	3 392 50	300	3 392 72
	-	-	3 392 50	300	3 393 00
	-	-	3 392 50	300	3 393 01
	-	-	3 392 50	300	3 393 02
	-	-	3 392 50	400	3 393 30
	-	-	3 392 50	400	3 393 31
	-	-	3 392 50	400	3 393 32
	-	-	3 392 50	500	3 393 65
	-	-	3 392 50	500	3 393 66
	-	-	3 392 50	400	3 393 60
	-	-	3 392 50	400	3 393 61
	-	-	3 392 50	400	3 393 62
	-	-	3 392 50	500	3 393 95
	-	-	3 392 50	500	3 393 96
	-	-	3 392 50	400	3 393 91
	-	-	3 392 50	400	3 393 92
	-	-	3 394 51	800	3 394 54
	-	-	3 394 50	800	3 394 52
	-	-	3 394 50	800	3 394 53
	FIXING ON PLATE				
	-	3 394 60	-	300	3 394 71
	-	3 394 61	-	300	3 394 73
	-	3 394 62	-	300	3 394 75
	-	3 394 81	-	450	3 394 93
	-	3 394 82	-	450	3 394 95
	-	3 394 81	-	450	3 394 93
	-	3 394 82	-	450	3 394 95
	-	3 395 21	-	450	3 395 33
	-	3 395 22	-	450	3 395 35
	-	3 391 01	-	500	3 391 20
	-	3 391 03	-	500	3 391 23
	-	3 391 05	-	500	3 391 25
	-	3 391 01	-	500	3 391 30
	-	3 391 03	-	500	3 391 33
	-	3 391 05	-	500	3 391 35
	-	3 391 43	-	600	3 391 63
	-	3 391 45	-	600	3 391 65
	-	3 391 85	-	600	3 392 05
		3 392 22	-	500	3 392 33
		3 392 25	-	500	3 392 35
		3 392 22	-	500	3 392 43
		3 392 25	-	500	3 392 45

XL³ S 4000

distribution enclosures and equipment



3 380 05 + 3 382 02
+ 3 382 03



3 380 06 + 3 382 03 x 2



3 380 07 + 3 382 03
+ 3 382 04



3 380 40

Doors, side or rear panels, supports for faceplates and functional uprights, to be ordered separately (except for corner enclosures).

Enclosures supplied with corner pieces for plinth

Take protection devices up to 4000 A. Used to create assemblies certified IEC 61439-2

IP 30 without door

IP 40 with door

External height 2000 or 2200 mm

Capacity 16 modules/row (424 mm wide enclosures), 24 modules/row (574 mm or 800 mm wide enclosures with internal wiring sleeve, 36 modules/row (774 mm wide enclosures)

Usable faceplate height 1800 mm or 2000 mm

Pack	Cat.Nos	Enclosures height 2000 mm			
		Depth 400 mm			
		Faceplate height (mm)	Number of modules per row	Width (mm)	
				total	usable
1	3 380 01	1800	16	424	350
1	3 380 02	1800	24	574	500
1	3 380 03	1800	36	774	700
		Depth 600 mm			
1	3 380 05	1800	16	424	350
1	3 380 06	1800	24	574	500
1	3 380 07	1800	36	774	700
		Depth 800 mm			
1	3 380 09	1800	16	424	350
1	3 380 10	1800	24	574	500
1	3 380 11	1800	36	774	700

		Enclosures height 2200 mm			
		Depth 400 mm			
		Faceplate height (mm)	Number of modules per row	Width (mm)	
				total	usable
1	3 380 21	2000	16	424	350
1	3 380 22	2000	24	574	500
1	3 380 23	2000	36	774	700
		Depth 600 mm			
1	3 380 25	2000	16	424	350
1	3 380 26	2000	24	574	500
1	3 380 27	2000	36	774	700
		Depth 800 mm			
1	3 380 29	2000	16	424	350
1	3 380 30	2000	24	574	500
1	3 380 31	2000	36	774	700

		Corner enclosures
		Supplied with side panels, solid door and plinths
		Height 2000 mm
		For enclosure depth (mm)
1	3 380 40	400
1	3 380 41	600
1	3 380 42	800
		Height 2200 mm
1	3 380 50	400
1	3 380 51	600
1	3 380 52	800

		External cable sleeves		
		Fitted on either the right or left of enclosures using joining kits Cat.Nos 3 379 49/50		
		For enclosures height 2000 mm		
		Faceplate height (mm)	Width total (mm)	For enclosure depth (mm)
1	3 380 00	1800	350	400
1	3 380 04	1800	350	600
1	3 380 08	1800	350	800
		For enclosures height 2200 mm		
1	3 380 20	2000	350	400
1	3 380 24	2000	350	600
1	3 380 28	2000	350	800


		Metal doors
		Supplied with fixed handle
		Height 2000 mm
		For enclosures width (mm)
1	3 381 00	350
1	3 381 01	450
1	3 381 02	600
1	3 381 03	800
		Height 2200 mm
1	3 381 10	350
1	3 381 11	450
1	3 381 12	600
1	3 381 13	800

		Glass doors
		Supplied with fixed handle
		Height 2000 mm
		For enclosures width (mm)
1	3 381 20	450
1	3 381 21	600
1	3 381 22	800
		Height 2200 mm
1	3 381 30	450
1	3 381 31	600
1	3 381 32	800

		Replacement handles for doors		
		For XL ³ S 4000		
1	3 397 13	Locking handle no. 405		
1	3 397 18	Supplied with a set of 2 keys		

XL³ S 4000

equipment

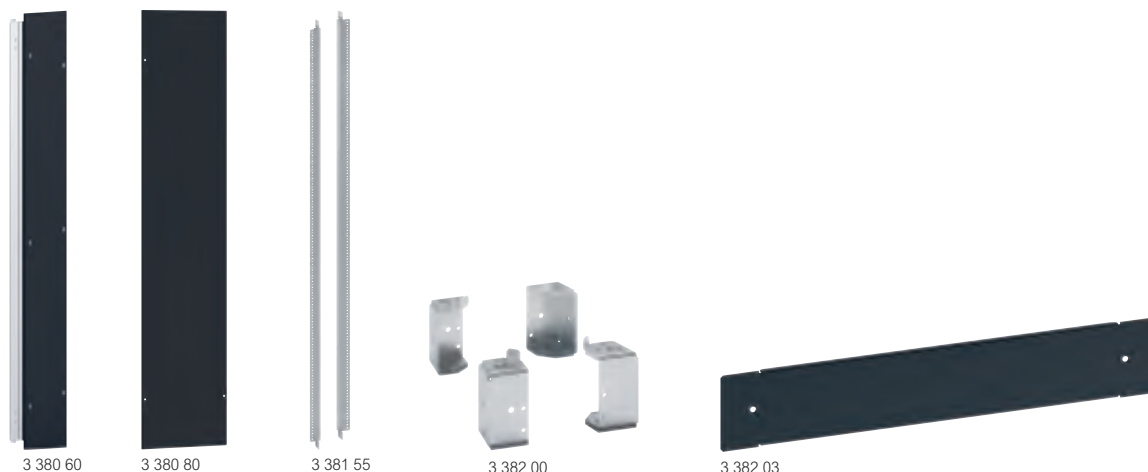

Pack Cat.Nos Side or rear panels

		Fixed with a 1/4 turn screw
		Height 2000 mm
		Width (mm)
1	3 380 60 ¹	200
1	3 380 80	350
1	3 380 61	400
1	3 380 81	450
1	3 380 62	600
1	3 380 63	800
		Height 2200 mm
1	3 380 70 ¹	200
1	3 380 90	350
1	3 380 71	400
1	3 380 91	450
1	3 380 72	600
1	3 380 73	800

		Faceplate supports
1	3 381 56	Faceplate supports for enclosure height 2000 mm
1	3 381 58	Faceplate supports for enclosure height 2200 mm

		Side functional uprights
		For fixing equipment in horizontal or vertical position
		Set of 2 uprights
1	3 381 55	For enclosures height 2000 mm
1	3 381 57	For enclosures height 2200 mm

		Intermediate uprights
1	3 381 46	For enclosures height 2000 mm
1	3 381 47	For enclosures height 2200 mm

		Central functional uprights
		For fixing equipment in horizontal position only
		For enclosures height 2000 mm
		For enclosures width (mm)
1	3 381 60	450
1	3 381 61	600
1	3 381 62	800
		For enclosures height 2200 mm
1	3 381 63	450
1	3 381 64	600
1	3 381 65	800

		Internal cable sleeve kits
1	3 381 43	For XL ³ S 4000 enclosure height 2000 mm
1	3 381 53	For XL ³ S 4000 enclosure height 2200 mm

Pack Cat.Nos Plinths for XL³ S 630 and 4000 enclosures

		Height 100 mm
		Corner pieces for plinth
		Set of 4 corner pieces
		Finishing panel for plinth
		Set of 2 plates
		Length (mm)
1	3 382 05	300
1	3 382 01	350
1	3 382 06	400
1	3 382 02	450
1	3 382 03	600
1	3 382 04	800

		Plinths for corner enclosures
		Kits consisting of screws, corner pieces and finishing panel for plinth
		Used in addition to the plinth supplied with the enclosure to double the height (200 mm)
1	3 382 10	For corner enclosure 400 x 400 mm
1	3 382 11	For corner enclosure 600 x 600 mm
1	3 382 12	For corner enclosure 800 x 800 mm

		Joining kits
		For connecting two enclosures
1	3 379 50	Joining screws for XL ³ S 630 and 4000 enclosures
1	3 379 49	Joining plates for XL ³ S 630 and 4000 enclosures (to be used to strengthen joining)

		Seal for IP 43 protection
1	3 379 51	Supplied ready to use for XL ³ S 630 and 4000 enclosures

		IP 30 finishing kits
		Set of 2 finishing pieces
		Allow 1 horizontal kit and 1 vertical kit per enclosure
		Finishing kits - vertical mounting
		For enclosures with faceplate height (mm)
1	3 379 67	1800
1	3 381 80	2000
		Finishing kits - horizontal mounting
		For enclosures with modules/row (width)
1	3 379 72	16 modules
1	3 379 73	24 modules
1	3 379 74	36 modules
1	3 379 71	For cable sleeves

1: Used when joining 2 enclosures of different depths

XL³ S 4000 - equipment for mounting modular devices and DPX³ on a rail





3 382 52

Pack	Cat.Nos	3-position rails
1	3 382 20	Used for mounting modular devices or DPX ³ 160/250 equipped with adaptors for rail
1	3 382 23	For 16-module enclosure
1	3 382 26	For 24-module enclosure
1	3 382 26	For 36-module enclosure
Rail height spacer		
1	3 382 40	Used to combine modular devices and DPX ³ 160/250 on the same rail
1	3 382 41	Used to combine modular devices and DRX on the same rail
1	3 382 42	Used to combine DRX and DPX ³ 160/250 on the same rail
Adaptors for mounting DPX³ 160 and 250 on a rail		
1	4 210 71	Used to mount DPX ³ on a rail
1	4 210 73	For DPX ³ 160 without side motor-driven handle
1	4 210 68	For DPX ³ 160 with e.l.c.b without side motor-driven handle
1	4 210 68	For all DPX ³ 160 devices with side motor-driven handle
1	4 210 72	For DPX ³ 250 without side motor-driven handle
1	4 210 74	For DPX ³ 250 with e.l.c.bs without side motor-driven handle
1	4 210 69	For all DPX ³ 250 devices with side motor-driven handle
Window faceplates		
		Fixed with locking clips, 1/4 turn screws or screws
1	3 382 51	Height 150 mm for modular devices
1	3 382 52	For 16-module enclosure
1	3 382 53	For 24-module enclosure
1	3 382 53	For 36-module enclosure
1	3 382 71	Height 300 mm for DPX³ 160/250 and DPX-IS 250
1	3 382 72	For 16-module enclosure
1	3 382 72	For 24-module enclosure
1	3 382 73	For 36-module enclosure
1	3 382 81	Height 400 mm for DPX³ 250 with e.l.c.b and terminal shield
1	3 382 82	For 16-module enclosure
1	3 382 82	For 24-module enclosure
1	3 382 83	For 36-module enclosure

XL³ S 4000

equipment for mounting DRX 125 HP on a plate

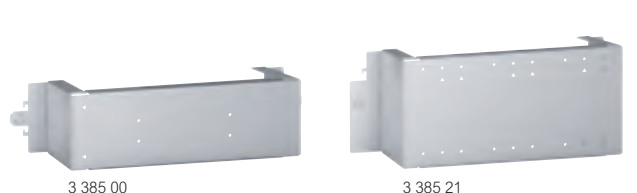

3 396 23




3 382 62

Pack	Cat.Nos	Fixing plates for DRX 125 HP on side uprights
1	3 385 00	Horizontal mounting
1	3 385 03	For 16-module enclosure
1	3 385 06	For 24-module enclosure
1	3 385 07	For 36-module enclosure
1	3 385 21	Vertical mounting
1	3 385 21	For 16-module enclosure
1	3 385 23	For 24-module enclosure
1	3 385 26	For 36-module enclosure
Fixing plates for DRX 125 HP on central upright		
1	3 396 23	For horizontal mounting
1	3 396 15	For DRX 125 HP - 3P
1	3 396 15	For DRX 125 HP - 4P
Reduced height faceplates for DPX³ 160/250 and DRX 125 HP/250 HP - horizontal mounting		
		Fixed with locking clips, 1/4 turn screws or screws
1	3 383 50	DPX³ 160 and DRX 125 HP fixed on central upright
1	3 383 53	For 16-module enclosure
1	3 383 53	For 24-module enclosure
1	3 383 56	For 36-module enclosure
Faceplates for DPX³ 160/250 and DRX 125 HP/250 HP - horizontal mounting		
		Fixed with locking clips, 1/4 turn screws or screws
1	3 383 51	DPX³ 160 and DRX 125 HP, 3P/4P fixed on side uprights or 4P on central upright
1	3 383 54	For 16-module enclosure
1	3 383 57	For 24-module enclosure
1	3 383 57	For 36-module enclosure
Window faceplates		
		Fixed with locking clips, 1/4 turn screws or screws
1	3 382 61	Height 200 mm for DRX 125 HP and Vistop up to 160 A
1	3 382 62	For 16-module enclosure
1	3 382 62	For 24-module enclosure
1	3 382 63	For 36-module enclosure

XL³ S 4000

equipment for mounting DPX³ 160/250 on a plate

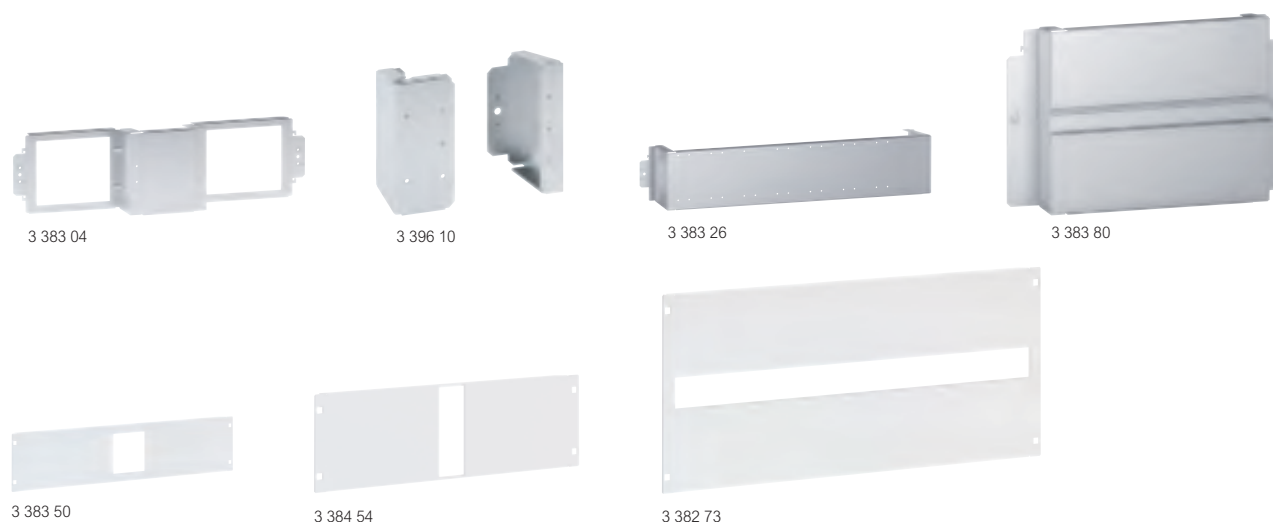

Fixing plates for DPX³ 160/250 horizontal mounting on side uprights

Pack	Cat.Nos	
1	3P 3 383 00 4P 3 383 01	DPX³ 160 For 16-module enclosure
1	3P/4P 3 383 04	For 24-module enclosure
1	3 383 07	For 36-module enclosure
1	3P 3 384 00 4P 3 384 01	DPX³ 250 For 16-module enclosure
1	3 384 03 3 384 04	For 24-module enclosure
1	3 384 06 3 384 07	For 36-module enclosure

Fixing plates for DPX³ 160/250 horizontal mounting on central upright

1	3P 3 396 20	For DPX ³ 160
1	3 396 21	For DPX ³ 250
1	4P 3 396 10	For DPX ³ 160 with or without e.l.c.b
1	3 396 11	For DPX ³ 250 with or without e.l.c.b

Fixing plates for DPX³ 160/250 - vertical mounting


1	3P/4P 3 383 20	DPX³ 160 For 16-module enclosure
1	3P 3 383 23 4P 3 383 24	For 24-module enclosure
1	3 383 26 3 383 27	For 36-module enclosure
1	4P with e.l.c.b 3 383 21	For 16-module enclosure
1	3 383 25	For 24-module enclosure
1	3 383 28	For 36-module enclosure
1	3P/4P 3 384 20	DPX³ 250 For 16-module enclosure
1	3P 3 384 23 4P 3 384 24	For 24-module enclosure
1	3 384 26 3 384 27	For 36-module enclosure
1	4P with e.l.c.b 3 384 21	For 16-module enclosure
1	3 384 25	For 24-module enclosure
1	3 384 28	For 36-module enclosure
1	3P/4P 3 383 80	DPX³ 160/250 with rotary handle For 16-module enclosure
1	3 383 81	For 24-module enclosure
1	3 383 82	For 36-module enclosure

Reduced height faceplates for DPX³ 160/250 and DRX 125 HP/250 HP - horizontal mounting

Fixed with locking clips, 1/4 turn screws or screws


DPX³ 160 and DRX 125 HP fixed on central upright

1	3P 3 383 50	For 16-module enclosure
1	3 383 53	For 24-module enclosure
1	3 383 56	For 36-module enclosure



DPX³ 250 and DRX 250 HP fixed on side uprights or on central upright

1	3 384 50	For 16-module enclosure
1	3 384 53	For 24-module enclosure
1	3 384 56	For 36-module enclosure




Faceplates for DPX³ 160/250 and DRX 125 HP/250 HP - horizontal mounting

Fixed with locking clips, 1/4 turn screws or screws


DPX³ 160 and DRX 125 HP, 3P/4P fixed on side uprights or 4P on central upright

1	3 383 51	For 16-module enclosure
1	3 383 54	For 24-module enclosure
1	3 383 57	For 36-module enclosure



DPX³ 250 and DRX 250 HP fixed on side uprights or on central upright

1	4P 3 384 51	For 16-module enclosure
1	3 384 54	For 24-module enclosure
1	3 384 57	For 36-module enclosure




Faceplates for DPX³ 160/250, DRX 250 HP and DPX-IS 250 - vertical mounting

Fixed with locking clips, 1/4 turn screws or screws


Height 300 mm

1	3P/4P 3 382 71	For 16-module enclosure
1	3 382 72	For 24-module enclosure
1	3 382 73	For 36-module enclosure



XL³ S 4000

equipment for mounting DRX/DPX³ 250 HP on a plate

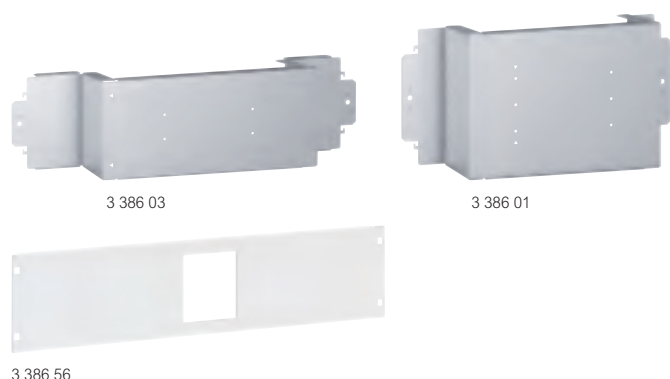



Pack	Cat.Nos	
1	3P 3 386 00	Reduced height fixing plates for DRX/DPX³ 250 HP - horizontal mounting
1	3 386 03	For 16-module enclosure
1	3 386 06	For 24-module enclosure
1	3 386 07	For 36-module enclosure
1	3P/4P 3 386 01	Fixing plates for DRX/DPX³ 250 HP - horizontal mounting
1	3 386 04	For 16-module enclosure
1	3 386 07	For 24-module enclosure
1	3 386 07	For 36-module enclosure
1	3P 4P 3 396 24 3 396 16	Fixing plates for DRX/DPX³ 250 HP - horizontal mounting on central upright
1		For DRX/DPX ³ 250 HP
1	3P 3 386 20	Fixing plates for DRX/DPX³ 250 HP - vertical mounting
1	3 386 23	DRX/DPX³ 250 HP
1	3 386 26	For 16-module enclosure
1	3 386 26	For 24-module enclosure
1	3 386 26	For 36-module enclosure
1	4P 3 386 21	DRX/DPX³ 250 HP with or without e.l.c.b
1	3 386 24	For 16-module enclosure
1	3 386 27	For 24-module enclosure
1	3 386 27	For 36-module enclosure
1	3P 3 386 50	Reduced height faceplates for DPX³ 250 HP - horizontal mounting
1	3 386 53	Fixed with locking clips, 1/4 turn screws or screws
1	3 386 56	For 16-module enclosure
1	3 386 53	For 24-module enclosure
1	3 386 56	For 36-module enclosure
1	4P 3 386 51	Faceplates for DPX³ 250 HP - horizontal mounting
1	3 386 54	Fixed with locking clips, 1/4 turn screws or screws. For DRX/DPX ³ 250 HP with or without e.l.c.b
1	3 386 57	For 16-module enclosure
1	3 386 57	For 24-module enclosure
1	3 386 57	For 36-module enclosure
1	3P 3 386 70	Faceplates for DPX³ 250 HP - vertical mounting
1	3 386 73	Fixed with locking clips, 1/4 turn screws or screws
1	3 386 76	DPX³ 250 HP
1	3 386 70	For 16-module enclosure
1	3 386 73	For 24-module enclosure
1	3 386 76	For 36-module enclosure
1	4P 3 386 71	DPX³ 250 HP with or without e.l.c.b
1	3 386 74	For 16-module enclosure
1	3 386 77	For 24-module enclosure
1	3 386 77	For 36-module enclosure

XL³ S 4000

equipment for mounting DPX-IS 250 on a plate



Pack	Cat.Nos	
1	3P/4P 3 389 02	Fixing plates for DPX-IS 250 - horizontal mounting
1	3 389 04	For 24-module enclosure
1	3 389 04	For 36-module enclosure
1	3P/4P 3 396 13	Fixing plates for DPX-IS 250 - mounting on central upright
1		For DPX-IS 250
1	3P/4P 3 389 20	Fixing plates for DPX-IS 250 - vertical mounting
1	3 389 22	For 16-module enclosure
1	3 389 24	For 24-module enclosure
1	3 389 24	For 36-module enclosure
1	3P/4P 3 389 42	Faceplates for DPX-IS 250 - horizontal mounting
1	3 389 44	Fixed with locking clips, 1/4 turn screws or screws
1	3 389 44	For 24-module enclosure
1	3 389 44	For 36-module enclosure
1	3P/4P 3 382 71	Faceplates for DPX-IS 250 - vertical mounting
1	3 382 72	Fixed with locking clips, 1/4 turn screws or screws
1	3 382 73	Height 300 mm
1	3 382 71	For 16-module enclosure
1	3 382 72	For 24-module enclosure
1	3 382 73	For 36-module enclosure



XL³ S 4000

equipment for mounting DPX³ 630 and DRX 630 on a plate



Pack	Cat.Nos	
	3P 4P	
1	3 387 00 3 387 01	For 16-module enclosure
1	3 387 03 3 387 04	For 24-module enclosure
1	3 387 16 3 387 07	For 36-module enclosure

Fixing plates for DPX³ 630 and DRX 630 - horizontal mounting on side uprights

For 16-module enclosure
For 24-module enclosure
For 36-module enclosure

	3P	
1	3 396 22	For DPX ³ 630
	4P	
1	3 396 12	For DPX ³ 630 with or without e.l.c.b

Fixing plates for DPX³ 630 - horizontal mounting on central upright

For DPX³ 630

	3P/4P	
1	3 387 20	For 16-module enclosure
1	3 387 24	For 24-module enclosure
1	3 387 27	For 36-module enclosure
	4P with e.l.c.b	
1	3 387 21	For 16-module enclosure
1	3 387 25	For 24-module enclosure
1	3 387 28	For 36-module enclosure

Fixing plates for DPX³ 630 and DRX 630 - vertical mounting

Without e.l.c.b
For 16-module enclosure
For 24-module enclosure
For 36-module enclosure

With e.l.c.b
For 16-module enclosure
For 24-module enclosure
For 36-module enclosure

	3P/4P	
1	3 383 86	For 16-module enclosure
1	3 383 87	For 24-module enclosure
1	3 383 88	For 36-module enclosure

Fixing plates for DPX³ 630 with rotary handle - vertical mounting

For 16-module enclosure
For 24-module enclosure
For 36-module enclosure

	3P/4P	
1	3 383 89	For 16-module enclosure
1	3 383 90	For 24-module enclosure
1	3 383 91	For 36-module enclosure

Fixing plates for DPX³ 630 with motor-driven handle - vertical mounting

For 16-module enclosure
For 24-module enclosure
For 36-module enclosure

	3P/4P	
1	3 384 80	For 24-module enclosure
1	3 384 81	For 36-module enclosure
	3P/4P	
1	3 384 82	For 24-module enclosure
1	3 384 83	For 36-module enclosure

Fixing plates for DPX³ 630 transfer switch version - vertical mounting

Transfer switch without motor-driven handle
For 24-module enclosure
For 36-module enclosure

Transfer switch with motor-driven handle
For 24-module enclosure
For 36-module enclosure


	3P 4P	
1	3 387 50 3 387 51	
1	3 387 53 3 387 54	
1	3 387 56 3 387 57	
	4P with e.l.c.b	
1	3 387 58	

Faceplates for DPX³ 630 and DRX 630 - horizontal mounting

For 16-module enclosure
For 24-module enclosure
For 36-module enclosure

With e.l.c.b

For 36-module enclosure



	3P/4P	
1	3 387 70	
1	3 387 74	
1	3 387 77	
	4P with e.l.c.b	
1	3 387 71	
1	3 387 75	
1	3 387 78	

Faceplates for DPX³ 630 and DRX 630 - vertical mounting

Fixed with locking clips, 1/4 turn screws or screws

Without e.l.c.b

For 16-module enclosure
For 24-module enclosure
For 36-module enclosure

With e.l.c.b

For 16-module enclosure
For 24-module enclosure
For 36-module enclosure



	3P/4P	
1	3 383 92	
1	3 383 93	
1	3 383 94	

Faceplates for DPX³ 630 with rotary or motor-driven handle - vertical mounting

Fixed with locking clips, 1/4 turn screws or screws
For 16-module enclosure
For 24-module enclosure
For 36-module enclosure




	3P/4P	
1	3 384 84	
1	3 384 85	

Faceplates for DPX³ 630 transfer switch - vertical mounting

Fixed with locking clips, 1/4 turn screws or screws


With or without motor-driven handle

For 24-module enclosure
For 36-module enclosure




XL³ S 4000


equipment for mounting DPX-IS 630 on a plate

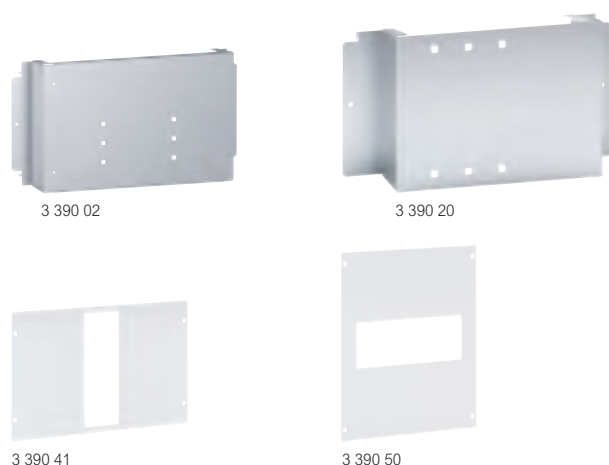




Pack	Cat.Nos	
1	3P/4P 3 390 02	Fixing plates for DPX-IS 630 - horizontal mounting on side uprights For 24-module enclosure
1	3 390 14	For 36-module enclosure
1	3P 3 396 14	Fixing plates for DPX-IS 630 - horizontal mounting on central upright For DPX-IS 630
1	3P/4P 3 390 20	Fixing plates for DPX-IS 630 - vertical mounting For 16-module enclosure
1	3 390 22	For 24-module enclosure
1	3 390 24	For 36-module enclosure
1	3P/4P 3 390 41	Faceplates for DPX-IS 630 - horizontal mounting Fixed with locking clips, 1/4 turn screws or screws
1	3 390 43	For 24-module enclosure
1	3 390 43	For 36-module enclosure
1	3P/4P 3 390 50	Faceplates for DPX-IS 630 - vertical mounting Fixed with locking clips, 1/4 turn screws or screws
1	3 390 52	For 16-module enclosure
1	3 390 54	For 24-module enclosure
1	3 390 54	For 36-module enclosure



XL³ S 4000 - equipment for mounting DPX³ 1600 and DPX-IS 1600 on a plate

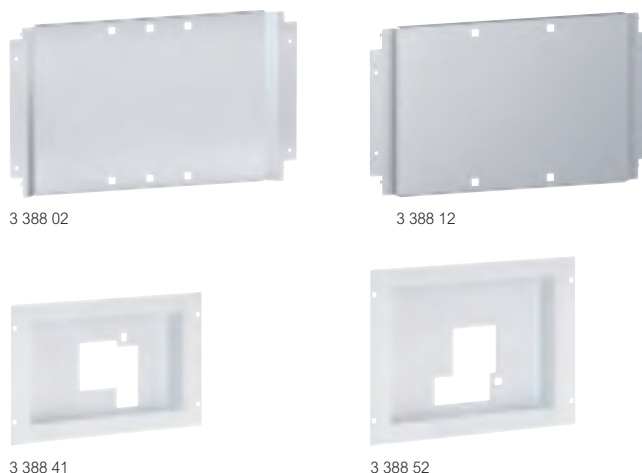

Pack	Cat.Nos	
1	3P 3 388 01	Fixing plates for DPX³ 1600 and DPX-IS 1600 - horizontal mounting For 24-module enclosure
1	4P 3 388 02	For 36-module enclosure
1	3P 3 388 10	Fixing plates for DPX³ 1600 and DPX-IS 1600 - vertical mounting For 16-module enclosure
1	3P/4P 3 388 12	For 24-module enclosure
1	3 388 14	For 36-module enclosure
1	3P 3 388 41	Faceplates for DPX³ 1600 fixed on a plate Fixed with locking clips, 1/4 turn screws or screws
1	4P 3 388 42	Horizontal mounting For 24-module enclosure
1	3 388 43	For 36-module enclosure
1	3 388 50	Vertical mounting For 16-module enclosure
1	3P/4P 3 388 52	For 24-module enclosure
1	3 388 54	For 36-module enclosure
1	3P/4P 3 394 55	Faceplates for DPX³ 1600 fixed on SPX³-V collector rail Fixed with locking clips, 1/4 turn screws or screws
1	3P/4P 3 388 61	Faceplates for DPX-IS 1600 Fixed with locking clips, 1/4 turn screws or screws
1	4P 3 388 62	Horizontal mounting For 24-module enclosure
1	3 388 63	For 36-module enclosure
1	3 388 70	Vertical mounting For 16-module enclosure
1	3P/4P 3 388 72	For 24-module enclosure
1	3 388 74	For 36-module enclosure



XL³ S 4000

equipment for mounting DCX-M on a plate



3 390 60



3 390 61

Pack	Cat.Nos	Fixing plates for DCX-M - vertical mounting
1	3 390 60	For DCX-M size 1 - up to 63 A For 24-module enclosure
1	3 390 62	For DCX-M size 2 - up to 160 A For 24-module enclosure
1	3 390 64	For DCX-M size 3 - up to 400 A For 24-module enclosure
1	3 390 66	For DCX-M size 4 - up to 800 A For 24-module enclosure
1	3 390 68	For DCX-M size 5 - up to 1250 A For 24-module enclosure
1	3 390 70	For DCX-M size 6 - up to 1600 A For 36-module enclosure

Pack	Cat.Nos	Faceplates for DCX-M - vertical mounting
1	3 390 61	For DCX-M size 1 - up to 63 A For 24-module enclosure
1	3 390 63	For DCX-M size 2 - up to 160 A For 24-module enclosure
1	3 390 65	For DCX-M size 3 - up to 400 A For 24-module enclosure
1	3 390 67	For DCX-M size 4 - up to 800 A For 24-module enclosure
1	3 390 69	For DCX-M size 5 - up to 1250 A For 24-module enclosure
1	3 390 71	For DCX-M size 6 - up to 1600 A For 36-module enclosure

XL³ S 4000

equipment for mounting SPX on a busbar or plate



3 392 50



3 392 62



3 393 20



3 393 95



3 393 01

Pack Cat.Nos Fixing brackets for SPX insulating supports

Pack	Cat.Nos	
1	3 392 50	For fixing insulating supports Cat.No 6 052 46 for SPX on a busbar
		For SPX 000 to SPX 3 Cat.Nos 6 052 01/03/05/07/09

Fixing plates for SPX - vertical mounting

Pack	Cat.Nos	
1	3 392 60	For 16-module enclosure
1	3 392 61	For 24-module enclosure
1	3 392 62	For 36-module enclosure
For SPX 1		
		For SPX Cat.No 6 052 04
1	3 393 20	For 16-module enclosure
1	3 393 21	For 24-module enclosure
1	3 393 22	For 36-module enclosure
For SPX 2		
		For SPX Cat.No 6 052 06
1	3 393 50	For 16-module enclosure
1	3 393 51	For 24-module enclosure
1	3 393 52	For 36-module enclosure
For SPX 3		
		For SPX Cat.No 6 052 08
1	3 393 81	For 24-module enclosure
1	3 393 82	For 36-module enclosure





Pack Cat.Nos Faceplates for SPX - horizontal mounting

Pack	Cat.Nos	
		Fixed with locking clips, 1/4 turn screws or screws
1	3 393 65	For SPX 2
1	3 393 66	For 24-module enclosure
		For 36-module enclosure
1	3 393 95	For SPX 3
1	3 393 96	For 24-module enclosure
		For 36-module enclosure



Faceplates for SPX - vertical mounting

Pack	Cat.Nos	
		Fixed with locking clips, 1/4 turn screws or screws
1	3 392 70	For SPX 000
1	3 392 71	For 16-module enclosure
1	3 392 72	For 24-module enclosure
		For 36-module enclosure
1	3 393 00	For SPX 00
1	3 393 01	For 16-module enclosure
1	3 393 02	For 24-module enclosure
		For 36-module enclosure
1	3 393 30	For SPX 1
1	3 393 31	For 16-module enclosure
1	3 393 32	For 24-module enclosure
		For 36-module enclosure
1	3 393 60	For SPX 2
1	3 393 61	For 16-module enclosure
1	3 393 62	For 24-module enclosure
		For 36-module enclosure
1	3 393 91	For SPX 3
1	3 393 92	For 24-module enclosure
		For 36-module enclosure



Fixing accessories for faceplates p. 33

XL³ S 4000

equipment for mounting SPX³-V and SPX-D on a busbar or plate



3 394 50




3 394 53




3 394 61



3 394 73

Pack	Cat.Nos	Fixing brackets for SPX ³ -V insulating supports
1	3 394 51	For fixing insulating supports Cat.No 6 058 80 for SPX ³ -V on a busbar
1	3 394 50	For SPX ³ -V - horizontal mounting For SPX ³ -V - vertical mounting
Faceplates for SPX³-V		
		Fixed with locking clips, 1/4 turn screws or screws
1	3 394 54	For SPX³-V - horizontal mounting For 36-module enclosure
1	3 394 52	For SPX³-V - vertical mounting For 24-module enclosure
1	3 394 53	For 36-module enclosure
		
1	3 394 57	Blanking plate for SPX³-V faceplate For SPX ³ -V faceplate

Pack	Cat.Nos	Fixing plates for SPX-D - vertical mounting
		For SPX-D 3P or 4P
1	3 394 60	For SPX-D 160 For 16-module enclosure
1	3 394 61	For 24-module enclosure
1	3 394 62	For 36-module enclosure
1	3 394 81	For SPX-D 250 and 400 For 24-module enclosure
1	3 394 82	For 36-module enclosure
1	3 395 21	For SPX-D 630 For 24-module enclosure
1	3 395 22	For 36-module enclosure
		Faceplates for SPX-D - vertical mounting
		Fixed with locking clips, 1/4 turn screws or screws
	3P/4P	For SPX-D 160
1	3 394 71	For 16-module enclosure
1	3 394 73	For 24-module enclosure
1	3 394 75	For 36-module enclosure
1	3 394 93	For SPX-D 250 and 400 For 24-module enclosure
1	3 394 95	For 36-module enclosure
1	3 395 33	For SPX-D 630 For 24-module enclosure
1	3 395 35	For 36-module enclosure



XL³ S 4000

equipment for mounting DMX³ and DMX-SP on a plate



Pack Cat.Nos Fixing plates for DMX³ size 1600

Pack	Cat.Nos	Fixing plates for DMX ³ size 1600
1	3P/4P	Fixed or draw-out version
1	3 391 01	For 16-module enclosure
1	3 391 03	For 24-module enclosure
1	3 391 05	For 36-module enclosure

Faceplates for DMX³ size 1600

Fixed with locking clips, 1/4 turn screws or screws

1	3P	Fixed version	
1	3 391 20	For 16-module enclosure	
1	3P/4P	Fixed version	
1	3 391 23	For 24-module enclosure	
1	3 391 25	For 36-module enclosure	
1	3P	Draw-out version	
1	3 391 30	For 16-module enclosure	
1	3P/4P	Fixed version	
1	3 391 33	For 24-module enclosure	
1	3 391 35	For 36-module enclosure	

Fixing plates for DMX³ size 2500

1	3P/4P	Fixed and draw-out version
1	3 391 43	For 24-module enclosure
1	3 391 45	For 36-module enclosure

Faceplates for DMX³ size 2500

Fixed with locking clips, 1/4 turn screws or screws

1	3P/4P	Fixed and draw-out version	
1	3 391 63	For 24-module enclosure	
1	3 391 65	For 36-module enclosure	

Fixing plates for DMX³ size 4000

1	3P/4P	Fixed and draw-out version
1	3 391 85	For 36-module enclosure

Faceplates for DMX³ size 4000

1	3P/4P	Fixed and draw-out version	
1	3 392 05	For 36-module enclosure	
1	3 392 05	For 36-module enclosure	

Pack Cat.Nos Fixing plates for DMX-SP size 2500

Pack	Cat.Nos	Fixing plates for DMX-SP size 2500
1	3P/4P	Fixed and draw-out version
1	3 392 22	For 24-module enclosure
1	3 392 25	For 36-module enclosure

Faceplates for DMX-SP size 2500

Fixed with locking clips, 1/4 turn screws or screws


1	3P/4P	Fixed version	
1	3 392 33	For 24-module enclosure	
1	3 392 35	For 36-module enclosure	
1	3P/4P	Draw-out version	
1	3 392 43	For 24-module enclosure	
1	3 392 45	For 36-module enclosure	

XL³ S 4000

universal accessories and mounting plates



3 395 40



3 395 60

Pack	Cat.Nos	Universal rails
1	3 382 43	For 16-module enclosure
1	3 382 44	For 24-module enclosure
1	3 382 45	For 36-module enclosure

Solid universal plates

For 16-module enclosures

		Height (mm)
1	3 395 40	200
1	3 395 41	300
1	3 395 42	400
1	3 395 43	600

For 24-module enclosures

1	3 395 44	200
1	3 395 45	300
1	3 395 46	400
1	3 395 47	600

For 36-module enclosures

1	3 395 48	200
1	3 395 49	300
1	3 395 50	400
1	3 395 51	600

Perforated universal plates

For 16-module enclosures

		Height (mm)
1	3 395 60	200
1	3 395 61	300
1	3 395 62	400
1	3 395 63	600

For 24-module enclosures

1	3 395 64	200
1	3 395 65	300
1	3 395 66	400
1	3 395 67	600

For 36-module enclosures

1	3 395 68	200
1	3 395 69	300
1	3 395 70	400
1	3 395 71	600

Universal support for cable sleeve

1	3 397 51	Vertical sloping support for cable sleeve
---	----------	---

Full-height solid mounting plates

For installation in XL³ S 4000 enclosures

		For enclosures	Height (mm)	Width (mm)
1	3 381 70	2000	600	
1	3 381 71	2000	800	
1	3 381 72	2200	600	
1	3 381 73	2200	800	

Intermediate plate

For installation in XL³ S 4000 enclosures

1	3 381 74	For enclosures height 2200 mm Can be cut to height 2000 mm
---	----------	---

XL³ S 4000

solid faceplates and fixing accessories for faceplates



3 395 88



3 395 85



3 390 80

Full-height solid metal faceplates

		Fixed with locking clips, 1/4 turn screws or screws			
		Faceplate total height (mm)	Faceplate usable height (mm)	Faceplate total width (mm)	Faceplate usable width (mm)
1	3 378 96	2000	1800	350	343
1	3 381 50	2200	2000	350	343

Solid metal faceplates

Fixed with locking clips, 1/4 turn screws or screws

Height 50 mm

		For enclosures (modules)	Faceplate usable height (mm)
1	3 395 92	16	49
1	3 395 95	24	49
1	3 395 98	36	49

Height 100 mm

1	3 395 93	16	99
1	3 395 96	24	99
1	3 395 99	36	99

Height 150 mm

1	3 395 94	16	149
1	3 395 97	24	149
1	3 396 00	36	149

Height 200 mm

1	3 395 80	16	199
1	3 395 84	24	199
1	3 395 88	36	199

Height 300 mm

1	3 395 81	16	299
1	3 395 85	24	299
1	3 395 89	36	299

Height 400 mm

1	3 395 82	16	399
1	3 395 86	24	399
1	3 395 90	36	399

Height 600 mm

1	3 395 83	16	599
1	3 395 87	24	599
1	3 395 91	36	599

Perforated plates for ventilation

Fixed with locking clips, 1/4 turn screws or screws

Height 150 mm

1	3 390 80	For 16-module enclosure
1	3 390 81	For 24-module enclosure
1	3 390 82	For 36-module enclosure

Height 200 mm


1	3 390 83	For 16-module enclosure
1	3 390 84	For 24-module enclosure
1	3 390 85	For 36-module enclosure

Fixing accessories for faceplates

1	3 397 00	Set of 100 locking clips for quick fixing
1	3 397 01	Set of 100 1/4 turn screws
1	3 397 02	Set of 100 screws

XL³ S 4000

busbar supports and accessories

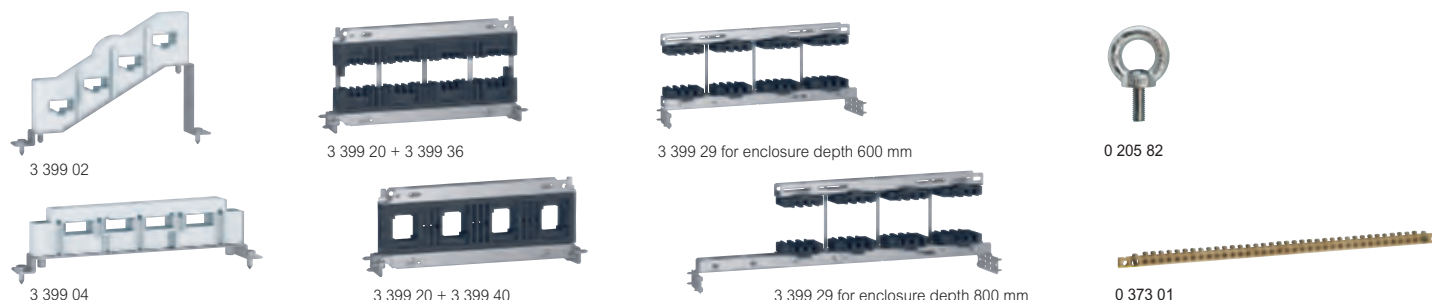

Technical characteristics see e-catalogue
Busbar supports selection chart p. 58


Pack	Cat.Nos	Busbar supports	Pack	Cat.Nos	Kits for busbar supports
1	3 399 00	For copper busbars ≤ 400 A Insulating support for flat copper bars 18 x 4, 25 x 4, 25 x 5 and 32 x 5 mm in staggered position			Used to make aluminium busbars with supports Cat.Nos. 3 399 25/26/27 and either copper or aluminium busbars with supports Cat.Nos 3 399 20/21/22/23
1	3 399 01	Insulating support for flat copper bars 18 x 4, 25 x 4 and 32 x 5 mm in aligned position Can be fixed on the enclosure functional uprights with the help of crosspieces Cat.Nos 3 379 81/82 (to be ordered separately) (p. 30)	1	3 399 36	For flat copper bars Bar thickness: 5 mm; bar height: up to 63 mm
		For aluminium busbars ≤ 630 A Compatible with C-section aluminium bars Cat.Nos 4 044 30/31/32 (p. 55)	1	3 399 37	For flat copper bars Bar thickness: 5 mm; bar height: from 75 to 125 mm
1	3 399 02	Insulating support for aluminium bars in staggered position	1	3 399 38	For flat copper bars Bar thickness: 10 mm; bar height: up to 60 mm
1	3 399 03	Insulating lug support for aluminium bars in staggered position	1	3 399 39	For flat copper bars Bar thickness: 10 mm; bar height: from 80 to 120 mm
1	3 399 04	Insulating support for aluminium bars in aligned position. Can be fixed on the enclosure functional uprights with the help of crosspieces Cat.Nos 3 379 81/82 (to be ordered separately) (p. 30)	1	3 399 40	For aluminium C-section bars (1600 A max.) Supplied with accessories to transform busbar support into lug support
1	3 399 05	Insulating lug support for aluminium bars in aligned position. Can be fixed on the enclosure functional uprights with the help of crosspieces Cat.Nos 3 379 81/82 (to be ordered separately) (p. 30)	1	3 399 24	For double aluminium C-section bars (3200 A max.) Supplied with accessories to transform busbar support into lug support
1	3 399 06	For copper busbars ≤ 800 A Insulating support for flat copper busbars 18 x 4, 25 x 5, 32 x 5, 50 x 5 and 63 x 5 mm in sloping position			Crosspieces
		For aluminium busbars ≤ 1600 A Compatible with C-section aluminium bars Cat.Nos 0 373 54/55/56/57/58 (p. 55) in staggered position. Fixing centres: 75 mm	1	3 397 30	For external cable sleeves width: 350 mm
1	3 399 31	Length: 300 mm (for enclosure depth 400 mm)	1	3 397 31	For 16-module enclosure or width: 450 mm
1	3 399 32	Length: 500 mm (for enclosure depth 600 mm)	1	3 397 34	For enclosure depth: 400 mm
1	3 399 33	Length: 700 mm (for enclosure depth 800 mm)	1	3 397 35	For 24-module enclosure or depth 600 mm
		For copper/aluminium busbars ≤ 3200 A Compatible with C-section aluminium bars Cat.Nos 0 373 54/55/56/57/58 (p. 55) To be equipped with the kits for busbar supports Cat.Nos 3 399 24/36/37/38/39/40 according to the busbar dimensions and type	1	3 397 36	For 36-module enclosure or depth 800 mm
1	3 399 20	For copper/aluminium busbars in aligned position. Fixing centres: 75 mm For enclosures depth/width: 400/450 mm			Plate for 630 A aluminium busbar
1	3 399 21	For copper/aluminium busbars in aligned position. Fixing centres: 75 mm For enclosures depth/width: 600 mm	1	0 373 84	Connection plate for aluminium busbar
1	3 399 22	For copper/aluminium busbars in aligned position. Fixing centres: 75 mm For enclosures depth/width: 800 mm			Earthing bar supports
1	3 399 23	Additional support for copper/aluminium busbars. Fixing centres: 75 mm. Mounted in addition to fixed supports Cat.Nos 3 399 20/21/22 to comply with clearance distances (Isc withstand)	1	3 397 21	For XL3 S 630 and 4000 enclosures
1	3 399 25	For aluminium busbars in aligned position. Fixing centres: 125 mm For enclosures depth/width: 600 mm			Connection of protective conductors
1	3 399 26	For aluminium busbars in aligned position. Fixing centres: 125 mm For enclosures depth/width: 800 mm			Additional brass bar
1	3 399 27	Additional support for aluminium busbars. Fixing centres: 125 mm. Mounted in addition to fixed supports Cat.Nos 3 399 25/26 to comply with clearance distances (Isc withstand)	1	0 373 01	For protective conductor. Fits onto functional uprights using the lugs supplied
1	3 399 29	For copper busbars ≤ 4000 A For copper busbars in aligned position. Fixing centres: 125 mm For enclosures depth: 600/800 mm	1	3 397 57	For 24-module width enclosure For 36-module width enclosure
1	3 399 30	Additional support for copper busbars in aligned position. Fixing centres: 125 mm. Mounted in addition to fixed supports Cat.No 3 399 29 to comply with clearance distances (Isc withstand)	1	3 397 53	Equipotential link conductor Length 350 mm. Cross-section 6 mm ²
					White RAL 9003 blanking plates
			20	0 016 60	5 modules, separable into modules or half-modules
			20	3 397 54	24 modules, untapped blanking panel which can be cut as required
					Clip-on holders for self-adhesive labels
			10	3 397 55	24 modules
			10	3 397 56	36 modules
					Fixing supports for Lina 25 ducting
			1	3 397 58	Set of 2 supports Fits directly onto functional uprights
					Lifting rings
			1	0 205 82	Set of 4 Maximum load of 340 kg per ring

XL³ S 4000

technical characteristics

■ Dimensions

Fixing to the floor

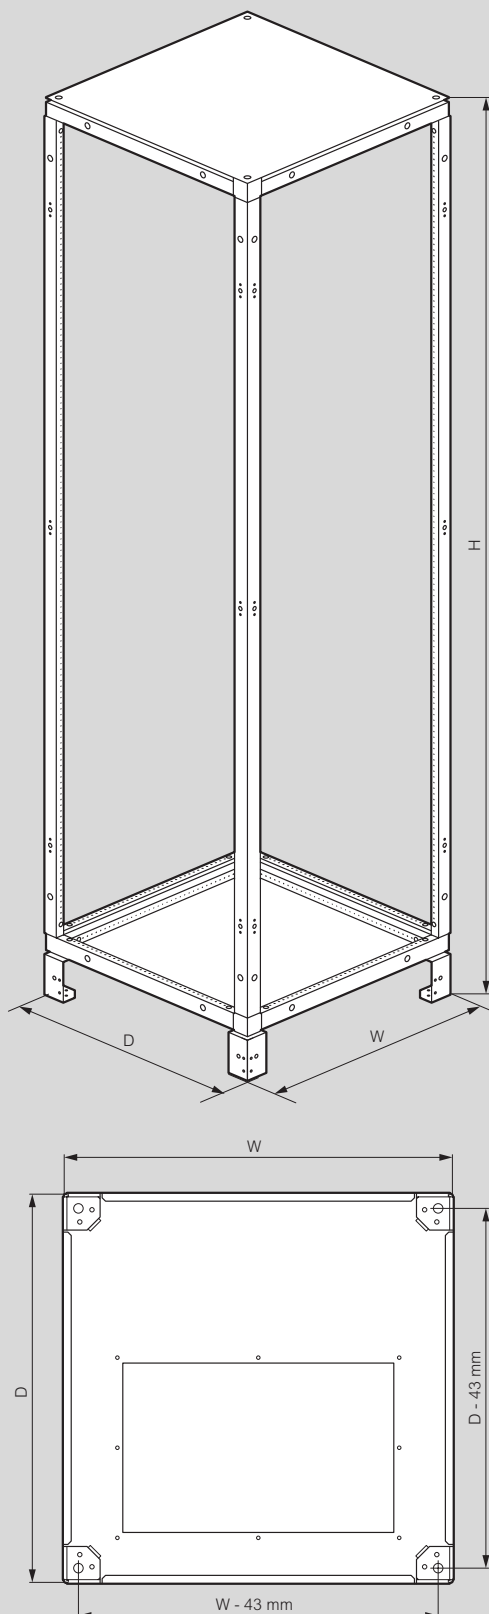







Cat.Nos	External dimensions (mm)		
	W	H	D
3 380 01	424	1981	374
3 380 02	574	1981	374
3 380 03	774	1981	374
3 380 05	424	1981	574
3 380 06	574	1981	574
3 380 07	774	1981	574
3 380 09	424	1981	774
3 380 10	574	1981	774
3 380 11	774	1981	774
3 380 21	424	2181	374
3 380 22	574	2181	374
3 380 23	774	2181	374
3 380 25	424	2181	574
3 380 26	574	2181	574
3 380 27	774	2181	574
3 380 29	424	2181	774
3 380 30	574	2181	774
3 380 31	774	2181	774

External cable sleeves

Cat.Nos	External dimensions (mm)		
	W	H	D
3 380 00	324	1981	374
3 380 04	324	1981	574
3 380 08	324	1981	774
3 380 20	324	2181	374
3 380 24	324	2181	574
3 380 28	324	2181	774

XL³ S 630 and XL³ S 4000

insulating busbar supports selection chart







Max. In (A)			Flat copper bars				Mounting
			400	800	3000	4000	
Supports							
			3 399 00	3 399 01	3 399 06	3 399 20/21/22/23 (fixing centres: 75 mm)	3 399 29/30 (fixing centres: 125 mm)
XL ³ S 630							
	Vertical at back of cable sleeve	W: 450 mm	3 399 00 + 3 379 80		3 399 06 ⁽¹¹⁾		
	Vertical at back of cabinet or enclosure	W: 16 modules					
		W: 24 modules		3 399 01 + 3 379 81			
		W: 36 modules		3 399 01 + 3 379 82			
	Main horizontal at back of enclosure	Cable sleeve width: 350 mm	3 399 00 + 3 379 79 x 2 ⁽¹⁾		3 399 06 ⁽¹¹⁾ + 3 379 79 x 2 ⁽¹⁾		
		W: 16 modules	3 399 00 + 3 379 80 x 2 ⁽¹⁾		3 399 06 ⁽¹¹⁾ + 3 379 80 x 2 ⁽¹⁾		
		W: 24 modules	3 399 00 + 3 379 81 x 2 ⁽¹⁾		3 399 06 ⁽¹¹⁾ + 3 379 81 x 2 ⁽¹⁾		
		W: 36 modules	3 399 00 + 3 379 82 x 2 ⁽¹⁾		3 399 06 ⁽¹¹⁾ + 3 379 82 x 2 ⁽¹⁾		
XL ³ S 4000							
	Main horizontal at top or bottom of enclosure	D: 400			3 399 20/23 + 3 399 36/37/38/39 ⁽⁵⁾		
		D: 600	Front access ⁽²⁾		3 399 21/23 + 3 399 36/37/38/39 ⁽⁵⁾		
			Rear access ⁽³⁾		3 399 21/23 + 3 399 36/37/38/39 or 3 399 20/23 + 3 399 36/37/38/39 ⁽⁶⁾	3 399 29/30	
		D: 800	Front access ⁽²⁾		3 399 22/23 + 3 399 36/37/38/39 ⁽⁵⁾		
			Rear access ⁽³⁾		3 399 22/23 + 3 399 36/37/38/39 or 3 399 21/23 + 3 399 36/37/38/39 ⁽⁶⁾	3 399 29/30	
	Horizontal transfer	D: 400			3 399 20/23 + 3 399 36/37/38/39 ⁽⁷⁾		
		D: 600	Front access ⁽²⁾		3 399 21/23 + 3 399 36/37/38/39 ⁽⁷⁾		
			Rear access ⁽³⁾		3 399 21/23 + 3 399 36/37/38/39 ⁽⁷⁾ or 3 399 20/23 + 3 399 36/37/38/39 ⁽⁸⁾	3 399 29/30	
		D: 800	Front access ⁽²⁾		3 399 22/23 + 3 399 36/37/38/39 ⁽⁷⁾		
			Rear access ⁽³⁾		3 399 22/23 + 3 399 36/37/38/39 ⁽⁷⁾ or 3 399 21/23 + 3 399 36/37/38/39 ⁽⁸⁾	3 399 29/30	
	Vertical lateral inside cable sleeve	D: 400	3 399 00 + 3 397 34		3 399 20/23 + 3 399 36/37/38/39 ⁽⁴⁾		
		D: 600	Front access ⁽²⁾	3 399 06 + 3 397 35	3 399 21/23 + 3 399 36/37/38/39		
			Rear access ⁽³⁾	3 399 06 + 3 397 35	3 399 21/23 + 3 399 36/37/38/39		
		D: 800	Front access ⁽²⁾	3 399 06 + 3 397 36	3 399 22/23 + 3 399 36/37/38/39		
			Rear access ⁽³⁾	3 399 06 + 3 397 36	3 399 22/23 + 3 399 36/37/38/39		

1: Only if fixed supports are added between the cabinet structural uprights (depending on required Ipk)

2: The horizontal main busbar is in the front position in the cabinet. The vertical busbars are therefore accessible from the front of the enclosure, behind the front panel (mainly via the cable sleeves).

3: The horizontal main busbar is at the back of the enclosure. The vertical busbars are accessible from the back of the enclosure, by removing the rear panels.

4: Connection possible only with a horizontal top or bottom busbar made of C-section aluminium bars. 5: Partial chassis.

C-section aluminium bars							
630		1600			3200		
							
3 399 02/03	3 399 04/05	3 399 20/21/22/23 (fixing centres: 75 mm)	3 399 31/32/33 (fixing centres: 75 mm)	3 399 25/26/27 (fixing centres: 125 mm)	3 399 20/21/22/23 (fixing centres: 75 mm)	3 399 25/26/27 (fixing centres: 125 mm)	
XL ³ S 630							
3 399 02/03 + 3 379 79							
	3 399 04/05 + 3 379 80						
	3 399 04/05 + 3 379 81						
	3 399 04/05 + 3 379 82						
3 399 02/03 + 3 379 79 x 2 ⁽¹⁾							
3 399 02/03 + 3 379 80 x 2 ⁽¹⁾							
3 399 02/03 + 3 379 81 x 2 ⁽¹⁾							
3 399 02/03 + 3 379 82 x 2 ⁽¹⁾							
XL ³ S 4000							
		3 399 20/23 + 3 399 40 ⁽⁶⁾			3 399 20 + 3 399 23 + 3 399 24 ⁽⁶⁾		
		3 399 21/23 + 3 399 40 ⁽⁶⁾		3 399 25/27 + 3 399 40 ⁽⁶⁾	3 399 21 + 3 399 23 + 3 399 24 ⁽⁶⁾	3 399 25 + 3 399 27 + 3 399 24 ⁽⁶⁾	
		3 399 21/23 + 3 399 40 or 3 399 20/23 + 3 399 40 ⁽⁶⁾		3 399 25/27 + 3 399 40 ⁽⁶⁾	3 399 21 + 3 399 23 + 3 399 24 or 3 399 20 + 3 399 23 + 3 399 24 ⁽⁶⁾	3 399 25 + 3 399 27 + 3 399 24 ⁽⁶⁾	
		3 399 22/23 + 3 399 40 ⁽⁶⁾		3 399 26/27 + 3 399 40 ⁽⁶⁾	3 399 22 + 3 399 23 + 3 399 24 ⁽⁶⁾	3 399 26 + 3 399 27 + 3 399 24 ⁽⁶⁾	
		3 399 22/23 + 3 399 40 or 3 399 21/23 + 3 399 40 ⁽⁶⁾		3 399 26/27 + 3 399 40 or 3 399 25/27 + 3 399 40 ⁽⁶⁾	3 399 22 + 3 399 23 + 3 399 24 or 3 399 21 + 3 399 23 + 3 399 24 ⁽⁶⁾	3 399 26 + 3 399 27 + 3 399 24 or 3 399 25 + 3 399 27 + 3 399 24 ⁽⁶⁾	
		3 399 20/23 + 3 399 40 ⁽⁷⁾			3 399 20 + 3 399 23 + 3 399 24 ⁽⁷⁾		
		3 399 21/23 + 3 399 40 ⁽⁷⁾		3 399 25/27 + 3 399 40 ⁽⁷⁾	3 399 21 + 3 399 23 + 3 399 24 ⁽⁷⁾	3 399 25 + 3 399 27 + 3 399 24 ⁽⁷⁾	
		3 399 21/23 + 3 399 40 ⁽⁷⁾ or 3 399 20/23 + 3 399 40 ⁽⁶⁾		3 399 25/27 + 3 399 40 ⁽⁷⁾	3 399 21 + 3 399 23 + 3 399 24 ⁽⁷⁾ or 3 399 20 + 3 399 23 + 3 399 24 ⁽⁶⁾	3 399 25 + 3 399 27 + 3 399 24 ⁽⁷⁾	
		3 399 22/23 + 3 399 40 ⁽⁷⁾		3 399 26/27 + 3 399 40 ⁽⁷⁾	3 399 22 + 3 399 23 + 3 399 24 ⁽⁷⁾	3 399 26 + 3 399 27 + 3 399 24 ⁽⁷⁾	
		3 399 22/23 + 3 399 40 ⁽⁷⁾ or 3 399 21/23 + 3 399 40 ⁽⁶⁾		3 399 26/27 + 3 399 40 ⁽⁷⁾ or 3 399 25/27 + 3 399 40 ⁽⁶⁾	3 399 22 + 3 399 23 + 3 399 24 ⁽⁷⁾ or 3 399 21 + 3 399 23 + 3 399 24 ⁽⁶⁾	3 399 26 + 3 399 27 + 3 399 24 ⁽⁷⁾ or 3 399 25 + 3 399 27 + 3 399 24 ⁽⁶⁾	
3 399 02/03 + 3 397 34		3 399 20/23 + 3 399 40 ⁽⁴⁾					
3 399 02/03 + 3 397 35		3 399 21/23 + 3 399 40		3 399 25/27 + 3 399 40			
3 399 02/03 + 3 397 35		3 399 21/23 + 3 399 40		3 399 25/27 + 3 399 40			
3 399 02/03 + 3 397 36		3 399 22/23 + 3 399 40		3 399 26/27 + 3 399 40			
3 399 02/03 + 3 397 36		3 399 22/23 + 3 399 40		3 399 26/27 + 3 399 40			

6: Mounting behind the crosspiece of the central upright.









7: Mounting on crosspieces in the enclosure.

8: Mounting behind functional uprights.

9: Except depth 400 mm. 10: The 2 sets of bars are placed one above the other in the height of the cabinet. 11: 630 A max.

XL³ S 4000

insulating busbar supports selection chart (continued)

Max. In (A)			Flat copper bars				
			400	800	3000	4000	
Supports							
Mounting			 3 399 00	 3 399 01	 3 399 06	 3 399 20/21/22/23 (fixing centres: 75 mm)	 3 399 29/30 (fixing centres: 25 mm)
XL ³ S 4000							
 Vertical lateral inside cable sleeve W: 350 mm	D: 400		3 399 00 + 3 397 34			3 399 20/23 + 3 399 36/37/38/39 ⁽³⁾	
	D: 600	Front access ⁽¹⁾	3 399 00 + 3 397 35		3 399 06 + 3 397 35	3 399 21/23 + 3 399 36/37/38/39	
		Rear access ⁽²⁾	3 399 00 + 3 397 35		3 399 06 + 3 397 35	3 399 21/23 + 3 399 36/37/38/39	
	D: 800	Front access ⁽¹⁾	3 399 00 + 3 397 36		3 399 06 + 3 397 36	3 399 22/23 + 3 399 36/37/38/39	
		Rear access ⁽²⁾	3 399 00 + 3 397 36		3 399 06 + 3 397 36	3 399 22/23 + 3 399 36/37/38/39	
	D: 800		3 399 00 + 3 397 36		3 399 06 + 3 397 36	3 399 22/23 + 3 399 36/37/38/39	3 399 29/30
 Vertical lateral inside cable sleeve W: 450 mm	D: 400		3 399 00 + 3 397 34			3 399 20/23 + 3 399 36/37/38/39 ⁽³⁾	
	D: 600	Front access ⁽¹⁾	3 399 00 + 3 397 35		3 399 06 + 3 397 35	3 399 21/23 + 3 399 36/37/38/39	
		Rear access ⁽²⁾	3 399 00 + 3 397 35		3 399 06 + 3 397 35	3 399 21/23 + 3 399 36/37/38/39	3 399 29/30
	D: 800	Front access ⁽¹⁾	3 399 00 + 3 397 36		3 399 06 + 3 397 36	3 399 22/23 + 3 399 36/37/38/39	
		Rear access ⁽²⁾	3 399 00 + 3 397 36		3 399 06 + 3 397 36	3 399 22/23 + 3 399 36/37/38/39	3 399 29/30
	D: 800 mm				3 399 06 + 3 397 35	3 399 21/23 + 3 399 36/37/38/39	
 Vertical lateral in enclosure behind functional uprights	D: 600 mm					3 399 20/23 + 3 399 36/37/38/39	
	D: 800 mm				3 399 06 + 3 397 35	3 399 21/23 + 3 399 36/37/38/39	
 Vertical lateral inside 36-module enclosures with central upright	D: 600 mm				3 399 06 + 3 397 35		
	D: 800 mm				3 399 06 + 3 397 36		
 Vertical at back of enclosures between functional uprights	W: 16 modules						
	W: 24 modules			3 399 01 + 3 379 81			
	W: 36 modules			3 399 01 + 3 379 82			
 Vertical at back of enclosure or cable sleeve	W: 16 modules/450 mm					3 399 20/23 + 3 399 36/37/38/39 ⁽⁶⁾	
	W: 24 modules				3 399 06 + 3 397 35	3 399 21/23 + 3 399 36/37/38/39 ⁽⁶⁾	
	W: 36 modules				3 399 06 + 3 397 36	3 399 22/23 + 3 399 36/37/38/39 ⁽⁶⁾	
 Main horizontal at the back of the enclosure ⁽⁸⁾	Internal cable sleeve					3 399 20 + 3 399 36/37/38/39 + 3 397 36 x 2	
	Internal cable sleeve with intermediate upright at back					3 399 20 + 3 399 36/37/38/39 + 3 397 37 x 2	
	Cable sleeve width: 350 mm					3 399 20 + 3 399 36/37/38/39 + 3 397 30 x 2	3 399 29 + 3 397 30 x 2
	Cable sleeve width: 450 mm/16 modules					3 399 20 + 3 399 36/37/38/39 + 3 397 31 x 2	3 399 29 + 3 397 31 x 2
	W: 24 modules					3 399 20 + 3 399 36/37/38/39 + 3 397 35 x 2	3 399 29 + 3 397 35 x 2
	W: 36 modules					3 399 20 + 3 399 36/37/38/39 + 3 397 36 x 2	3 399 29 + 3 397 36 x 2

1: The horizontal main busbar is in the front position in the cabinet. The vertical busbars are therefore accessible from the front of the enclosure, behind the front panel (mainly via the cable sleeves).

2: The horizontal main busbar is at the back of the enclosure. The vertical busbars are accessible from the back of the enclosure, by removing the rear panels.

3: Connection possible only with a horizontal top or bottom busbar made of C-section aluminium bars.

4: Partial chassis. 5: Mounting behind the crosspiece of the central upright.

C-section aluminium busbars							
630		1600			3200		
3 399 02/03	3 399 04/05	3 399 20/21/22/23 (fixing centres: 75 mm)	3 399 31/32/33 (fixing centres: 75 mm)	3 399 25/26/27 (fixing centres: 125 mm)	3 399 20/21/22/23 (fixing centres: 75 mm)	3 399 25/26/27 (fixing centres: 125 mm)	
XL ³ S 4000							
3 399 02/03 + 3 397 34		3 399 20/23 + 3 399 40 ⁽³⁾	3 399 31 ⁽³⁾				
3 399 02/03 + 3 397 35		3 399 21/23 + 3 399 40	3 399 32	3 399 25/27 + 3 399 40	3 399 21 + 3 399 23 + 3 399 24	3 399 25 + 3 399 27 + 3 399 24	
3 399 02/03 + 3 397 35		3 399 21/23 + 3 399 40	3 399 32	3 399 25/27 + 3 399 40	3 399 21 + 3 399 23 + 3 399 24	3 399 25 + 3 399 27 + 3 399 24	
3 399 02/03 + 3 397 36		3 399 22/23 + 3 399 40	3 399 33	3 399 26/27 + 3 399 40	3 399 22 + 3 399 23 + 3 399 24	3 399 26 + 3 399 27 + 3 399 24	
3 399 02/03 + 3 397 36		3 399 22/23 + 3 399 40	3 399 33	3 399 26/27 + 3 399 40	3 399 22 + 3 399 23 + 3 399 24	3 399 26 + 3 399 27 + 3 399 24	
3 399 02/03 + 3 397 34		3 399 20/23 + 3 399 40 ⁽³⁾	3 399 31 ⁽³⁾				
3 399 02/03 + 3 397 35		3 399 21/23 + 3 399 40	3 399 32	3 399 25/27 + 3 399 40	3 399 21 + 3 399 23 + 3 399 24	3 399 25 + 3 399 27 + 3 399 24	
3 399 02/03 + 3 397 35		3 399 21/23 + 3 399 40	3 399 32	3 399 25/27 + 3 399 40	3 399 21 + 3 399 23 + 3 399 24	3 399 25 + 3 399 27 + 3 399 24	
3 399 02/03 + 3 397 36		3 399 22/23 + 3 399 40	3 399 33	3 399 26/27 + 3 399 40	3 399 22 + 3 399 23 + 3 399 24	3 399 26 + 3 399 27 + 3 399 24	
3 399 02/03 + 3 397 36		3 399 22/23 + 3 399 40	3 399 33	3 399 26/27 + 3 399 40	3 399 22 + 3 399 23 + 3 399 24	3 399 26 + 3 399 27 + 3 399 24	
3 399 02/03 + 3 397 34		3 399 20/23 + 3 399 40					
3 399 02/03 + 3 397 35		3 399 21/23 + 3 399 40		3 399 25/27 + 3 399 40			
	3 399 04/05 + 3 379 80						
	3 399 04/05 + 3 379 81						
	3 399 04/05 + 3 379 82						
		3 399 20/23 + 3 399 40 ⁽⁶⁾					
		3 399 21/23 + 3 399 40 ⁽⁶⁾		3 399 25/27 + 3 399 40 ⁽⁶⁾			
		3 399 22/23 + 3 399 40 ⁽⁶⁾		3 399 26/27 + 3 399 40 ⁽⁶⁾			
		3 399 20 + 3 399 40 + 3 397 36 x 2		3 399 25 + 3 399 40 + 3 397 36 x 2	3 399 20 x 2 ⁽⁹⁾ + 3 397 36 x 3	3 399 25 x 2 ⁽⁹⁾ + 3 397 36 x 3	
		3 399 20 + 3 399 40 + 3 397 37 x 2		3 399 25 + 3 399 40 + 3 397 37 x 2	3 399 20 x 2 ⁽⁹⁾ + 3 397 37 x 3	3 399 25 x 2 ⁽⁹⁾ + 3 397 37 x 3	
		3 399 20 + 3 399 40 + 3 397 30 x 2		3 399 25 + 3 399 40 + 3 397 30 x 2	3 399 20 x 2 ⁽⁹⁾ + 3 397 30 x 3	3 399 25 x 2 ⁽⁹⁾ + 3 397 30 x 3	
		3 399 20 + 3 399 40 + 3 397 31 x 2		3 399 25 + 3 399 40 + 3 397 31 x 2	3 399 20 x 2 ⁽⁹⁾ + 3 397 31 x 3	3 399 25 x 2 ⁽⁹⁾ + 3 397 31 x 3	
		3 399 20 + 3 399 40 + 3 397 35 x 2		3 399 25 + 3 399 40 + 3 397 35 x 2	3 399 20 x 2 ⁽⁹⁾ + 3 397 35 x 3	3 399 25 x 2 ⁽⁹⁾ + 3 397 35 x 3	
		3 399 20 + 3 399 40 + 3 397 36 x 2		3 399 25 + 3 399 40 + 3 397 36 x 2	3 399 20 x 2 ⁽⁹⁾ + 3 397 36 x 3	3 399 25 x 2 ⁽⁹⁾ + 3 397 36 x 3	

6: Mounting on crosspieces in the enclosure.


7: Mounting behind functional uprights.




8: Except depth 400 mm.

9: The 2 sets of bars are placed one above the other in the height of the cabinet.

XL³ S 630 and XL³ S 4000



Busbar selection



			≤ 400				≤ 800					
Flat copper busbar supports			 3 399 00				 3 399 01				 3 399 06	
			Vertical busbar		Horizontal busbar		Vertical busbar		Vertical busbar		Horizontal busbar	
Flat copper bars												
Cat.Nos	Cross-section (mm)	Number of bars per pole	I (A)		I (A)		I (A)		I (A)		I (A)	
			IP ≤ 30	IP > 30	IP ≤ 30	IP > 30	IP ≤ 30	IP > 30	IP ≤ 30	IP > 30	IP ≤ 30	IP > 30
0 374 34	18 × 4	1	245	200	245	200	245	200	245	200	245	200
0 374 38	25 × 4	1	280	250	280	250	-	-	-	-	-	-
0 374 18	25 × 5	1	330	270	330	270	330	270	330	270	330	270
0 374 19	32 × 5	1	450	400	450	400	450	400	450	400	450	400
0 374 40	50 × 5	1	-	-	-	-	-	-	700	630	630	550
		2	-	-	-	-	-	-	-	-	-	-
		3	-	-	-	-	-	-	-	-	-	-
		4	-	-	-	-	-	-	-	-	-	-
0 374 41	63 × 5	1	-	-	-	-	-	-	800	700	720	630
		2	-	-	-	-	-	-	-	-	-	-
		3	-	-	-	-	-	-	-	-	-	-
		4	-	-	-	-	-	-	-	-	-	-
0 374 59	75 × 5	1	-	-	-	-	-	-	-	-	-	-
		2	-	-	-	-	-	-	-	-	-	-
		3	-	-	-	-	-	-	-	-	-	-
		4	-	-	-	-	-	-	-	-	-	-
0 374 43	80 × 5	1	-	-	-	-	-	-	-	-	-	-
		2	-	-	-	-	-	-	-	-	-	-
		3	-	-	-	-	-	-	-	-	-	-
		4	-	-	-	-	-	-	-	-	-	-
0 374 46	100 × 5	1	-	-	-	-	-	-	-	-	-	-
		2	-	-	-	-	-	-	-	-	-	-
		3	-	-	-	-	-	-	-	-	-	-
		4	-	-	-	-	-	-	-	-	-	-
	125 × 5	1	-	-	-	-	-	-	-	-	-	-
		2	-	-	-	-	-	-	-	-	-	-
		3	-	-	-	-	-	-	-	-	-	-
		4	-	-	-	-	-	-	-	-	-	-
	50 × 10	1	-	-	-	-	-	-	-	-	-	-
		2	-	-	-	-	-	-	-	-	-	-
		3	-	-	-	-	-	-	-	-	-	-
	60 × 10	1	-	-	-	-	-	-	-	-	-	-
		2	-	-	-	-	-	-	-	-	-	-
		3	-	-	-	-	-	-	-	-	-	-
	80 × 10	1	-	-	-	-	-	-	-	-	-	-
		2	-	-	-	-	-	-	-	-	-	-
		3	-	-	-	-	-	-	-	-	-	-
	100 × 10	1	-	-	-	-	-	-	-	-	-	-
		2	-	-	-	-	-	-	-	-	-	-
		3	-	-	-	-	-	-	-	-	-	-
	120 × 10	1	-	-	-	-	-	-	-	-	-	-
		2	-	-	-	-	-	-	-	-	-	-
		3	-	-	-	-	-	-	-	-	-	-

			≤ 630				≤ 1600					
C-section aluminium busbar supports			 3 399 02/03				 3 399 04/05				 3 399 31/32/33 (fixing centres: 75 mm)	
			Vertical busbar		Horizontal busbar		Vertical busbar		Vertical busbar			
C-section aluminium bars												
Cat.Nos	Cross-section (mm)	Number of bars per pole	I (A)		I (A)		I (A)		I (A)			
			IP ≤ 30	IP > 30	IP ≤ 30	IP > 30	IP ≤ 30	IP > 30	IP ≤ 30	IP > 30	IP ≤ 30	IP > 30
4 044 30	187	1	320	250	320	250	320	250	-	-	-	-
4 044 31	238	1	500	400	500	400	500	400	-	-	-	-
4 044 32	323	1	700	630	700	630	700	630	-	-	-	-
0 373 54	524	1	-	-	-	-	-	-	800	630	-	-
0 373 55	549	1	-	-	-	-	-	-	1000	800	-	-
0 373 56	586	1	-	-	-	-	-	-	1250	1000	-	-
0 373 57	686	1	-	-	-	-	-	-	1450	1250	-	-
0 373 58	824	1	-	-	-	-	-	-	1750	1600	-	-
0,373 58 x 2	824 x 2	2	-	-	-	-	-	-	-	-	-	-

1: One support Cat.No 3 399 20/21/22 combined with one support Cat.No 3 399 23.
2: One support Cat.No 3 399 25/26 combined with one support Cat.No 3 399 27.

Busbars and accessories





≤ 3000				≤ 4000			
 3 399 20/21/22/23 (fixing centres: 75 mm)		 3 399 29/30 (fixing centres: 125 mm)					
Vertical busbar		Horizontal busbar		Vertical busbar		Horizontal busbar	
 I (A)		 I (A)		 I (A)		 I (A)	
IP ≤ 30	IP > 30	IP ≤ 30	IP > 30	IP ≤ 30	IP > 30	IP ≤ 30	IP > 30
-	-	-	-	-	-	-	-
-	-	-	-	-	-	-	-
-	-	-	-	-	-	-	-
-	-	-	-	-	-	-	-
700	630	430	350	700	630	500	420
1150	1000	650	510	1180	1020	750	630
1600	1380	1000	900	1600	1380	1000	900
-	-	-	-	2020	1720	1120	1000
800	700	500	400	800	700	600	500
1350	1150	770	590	1380	1180	750	630
1900	1600	1100	1000	1900	1600	1100	1000
-	-	-	-	2350	1950	1350	1200
950	850	600	475	950	850	700	600
1500	1300	890	700	1600	1400	1000	850
2200	1900	1250	1100	2200	1900	1250	1100
-	-	-	-	2700	2300	1600	1400
1000	900	630	500	1000	900	750	630
1650	1450	940	740	1700	1480	1050	900
2350	2000	1300	1150	2350	2000	1300	1150
-	-	-	-	2850	2400	1650	1450
1250	1050	750	580	1250	1050	850	700
1900	1600	1120	900	2050	1800	1200	1050
2900	2450	1600	1400	2900	2450	1600	1400
-	-	-	-	3500	2900	1900	1650
1450	1270	1000	800	1450	1270	1000	800
2500	2150	1450	1250	2500	2150	1450	1250
3450	2900	1800	1600	3450	2900	1800	1600
-	-	-	-	4150	3450	2150	1950
950	850	880	650	950	850	880	650
1680	1470	1250	1050	1680	1470	1250	1050
-	-	-	-	2300	2030	2000	1600
1150	1020	1000	800	1150	1020	1000	800
2030	1750	1600	1250	2030	1750	1600	1250
-	-	-	-	2800	2400	2250	1850
1460	1270	1150	950	1460	1270	1150	950
2500	2150	1700	1500	2500	2150	1700	1500
-	-	-	-	3450	2900	2500	2000
1750	1500	1350	1150	1750	1500	1350	1150
3050	2550	2000	1650	3050	2550	2000	1650
-	-	-	-	4150	3500	2900	2400
2000	1750	1650	1450	2000	1750	1650	1450
3600	3000	2500	2000	3600	3000	2500	2000
-	-	-	-	4800	4000	3500	3000

≤ 1600/3200			
 3 399 20/21/22/23 (fixing centres: 75 mm)		 3 399 25/26/27 (fixing centres: 125 mm)	
Vertical busbar		Horizontal busbar	
 I (A)		 I (A)	
IP ≤ 30	IP > 30	IP ≤ 30	IP > 30
-	-	-	-
-	-	-	-
-	-	-	-
-	-	-	-
800	630	630	500
1000	800	800	630
1250	1000	1000	800
1450	1250	1250	1000
1750	1600	1400	1250
3500 ⁽¹⁾	3200 ⁽¹⁾	2400	2000
800	630	630	500
1000	800	800	630
1250	1000	1000	800
1450	1250	1250	1000
1750	1600	1400	1250
3500 ⁽²⁾	3200 ⁽²⁾	2400	2000



4 044 32 + 3 399 02 + 3 379 80 (p. 20)

Pack	Cat.Nos	C-section aluminium bars		
		Tinned copper aluminium C-section busbars Electrolytic compatibility with copper guaranteed		
		30 x 14 mm - length 1600 mm		
		Cross-section (mm)	I permissible (A)	
			IP ≤ 30	IP > 30
1	4 044 30	187	320	250
1	4 044 31	238	500	400
1	4 044 32	323	700	630
		40 x 30 mm - length 1780 mm		
1	0 373 54	524	800	630
1	0 373 55	549	1000	800
1	0 373 56	586	1250	1000
1	0 373 57	686	1450	1250
1	0 373 58	824	1750	1600
		Insulating caps for nuts		
1	3 399 41	Pack of 50 M8 caps		
1	3 399 42	Pack of 50 M10 caps		
1	3 399 43	Pack of 50 M12 caps		

		Copper busbars					
		Rigid, flat, threaded holes					
		Cross-section (mm)	I permissible (A)		Holes Ø mm	Length (mm)	
			IP ≤ 30	IP > 30			
10	0 373 88	12 × 2	110	80	M5	990	
10	0 373 89	12 × 4	160	125	M5	990	
10	0 374 33	15 × 4	200	160	M6	990	
10	0 374 34	18 × 4	245	200	M6	990	
10	0 374 38	25 × 4	280	250	M6	990	
4	0 374 18	25 × 5	330	270	M6	1750	
4	0 374 19	32 × 5	450	400	M6	1750	
		Rigid, flat, clearance holes					
1	0 374 40	50 × 5	700	630	10.5 - 6.5	1750	
1	0 374 41	63 × 5	800	700	10.5 - 8.5	1750	
1	0 374 59	75 × 5	950	850	10.5 - 6.5	1750	
1	0 374 43	80 × 5	1000	900	10.5 - 6.5	1750	
1	0 374 46	100 × 5	1250	1050	10.5 - 6.5	1750	

		Accessories		
		Insulating strip		
10	0 373 11	Insulating strip for flat copper bars 18 x 4, 25 x 4, 25 x 5 and 32 x 5 mm, length 1 m Supplied with fixing clips		
		Insulating screws		
50	0 367 74	M6 x 10		
		HF screws with contact washer		
50	0 367 75	M6 x 10		

Catalogue number index

Cat.Nos	Page	Pack	Cat.Nos	Page	Pack	Cat.Nos	Page	Pack	Cat.Nos	Page	Pack	Cat.Nos	Page	Pack	Cat.Nos	Page	Pack
0 016 00			3 372 27	14	1	3 375 92	24	1	3 377 82	25	1	3 379 50	26	1	3 380 62	45	1
0 016 60	34	20	28	-	1	93	-	1	83	-	1	51	-	1	63	-	1
0 097 00			34	15	1	3 376 00			91	-	1	52	-	1	70	-	1
0 097 99	34	10	35	-	1	3 376 00	24	1	92	-	1	54	34	1	71	-	1
0 205 00			36	-	1	01	-	1	3 378 00			55	-	1	72	-	1
0 205 82	34	1	37	-	1	02	-	1	3 378 01	25	1	56	-	1	73	-	1
0 364 00			38	-	1	03	-	1	02	-	1	57	-	1	80	-	1
0 364 94	34	1	52	16	1	10	-	1	03	-	1	60	26	1	81	-	1
95	-	1	53	-	1	11	-	1	11	-	1	61	-	1	90	-	1
96	-	1	54	-	1	12	-	1	12	-	1	62	-	1	91	-	1
97	-	1	55	-	1	13	-	1	13	-	1	63	-	1	3 381 00		
98	-	1	56	-	1	20	-	1	21	-	1	64	-	1	3 381 00	44	1
0 365 00			57	-	1	21	-	1	22	-	1	65	-	1	01	-	1
0 365 80	34	20	58	-	1	22	-	1	23	-	1	66	-	1	02	-	1
81	-	20	64	-	1	23	-	1	31	-	1	67	-	1	03	-	1
82	-	1	65	-	1	40	26	1	32	-	1	68	-	1	10	-	1
0 367 00			66	-	1	41	25	1	33	-	1	69	-	1	11	-	1
0 367 74	63	50	67	-	1	42	-	1	41	-	1	70	-	1	12	-	1
75	-	50	72	-	1	43	-	1	42	-	1	71	-	1	13	-	1
0 373 00			73	-	1	50	26	1	43	-	1	72	-	1	20	-	1
0 373 00	16	1	74	-	1	51	25	1	51	-	1	73	-	1	21	-	1
01	34	1	75	-	1	52	-	1	52	-	1	74	-	1	22	-	1
11	63	10	76	-	1	53	-	1	53	-	1	79	34	1	30	-	1
54	-	1	77	-	1	60	26	1	52	-	1	80	-	1	31	-	1
55	-	1	78	-	1	61	25	1	53	-	1	81	-	1	32	-	1
56	-	1	84	-	1	62	-	1	62	24	1	82	-	1	33	-	1
57	-	1	85	-	1	63	-	1	63	-	1	83	-	1	43	45	1
58	-	1	86	-	1	70	26	1	64	-	1	86	26	1	46	-	1
84	34	1	87	-	1	71	25	1	65	-	1	87	-	1	47	-	1
88	63	10	88	-	1	72	-	1	66	-	1	88	-	1	50	55	1
89	-	10	3 374 00			73	-	1	67	-	1	89	-	1	53	-	1
0 374 00			3 374 00	16	1	80	26	1	68	-	1	90	-	1	55	45	1
0 374 18	63	4	04	-	1	81	25	1	69	-	1	91	-	1	56	-	1
19	-	4	05	-	1	82	-	1	70	-	1	92	-	1	57	-	1
33	-	10	06	-	1	83	-	1	71	-	1	93	-	1	58	-	1
34	-	10	07	-	1	90	26	1	72	-	1	94	-	1	60	-	1
38	-	10	10	-	1	91	25	1	82	26	1	95	-	1	61	-	1
40	-	1	11	-	1	92	-	1	84	-	1	96	-	1	62	-	1
41	-	1	3 375 00			93	-	1	86	-	1	3 380 00			63	-	1
43	-	1	3 375 20	24	1	3 377 00			88	-	1	3 380 00	44	1	64	-	1
46	-	1	21	-	1	3 377 00	26	1	90	-	1	01	-	1	65	-	1
49	-	1	22	-	1	01	25	1	92	-	1	02	-	1	70	55	1
3 372 00			23	-	1	02	-	1	94	-	1	03	-	1	71	-	1
3 372 02	14	1	30	-	1	03	-	1	96	-	1	04	-	1	72	-	1
03	-	1	31	-	1	10	26	1	98	-	1	05	-	1	73	-	1
04	-	1	32	-	1	11	25	1	3 379 00			06	-	1	74	-	1
05	-	1	33	-	1	12	-	1	3 379 00	26	1	07	-	1	80	45	1
06	-	1	40	-	1	13	-	1	02	-	1	08	-	1	3 382 00		
07	-	1	41	-	1	20	26	1	12	-	1	09	-	1	3 382 00	26	1
08	-	1	42	-	1	21	25	1	13	-	1	10	-	1	01	-	1
3 372 14	15	1	43	-	1	22	-	1	14	-	1	11	-	1	02	-	1
15	-	1	44	-	1	23	-	1	15	-	1	20	-	1	03	-	1
16	-	1	50	-	1	30	26	1	16	-	1	21	-	1	04	-	1
17	-	1	51	-	1	31	25	1	17	-	1	22	-	1	05	-	1
18	-	1	52	-	1	32	-	1	18	-	1	23	-	1	06	45	1
22	14	1	53	-	1	33	-	1	19	-	1	24	-	1	10	-	1
23	-	1	60	-	1	40	26	1	20	-	1	25	-	1	11	-	1
24	-	1	61	-	1	41	25	1	21	-	1	26	-	1	12	-	1
25	-	1	62	-	1	42	-	1	22	-	1	27	-	1	20	27	1
26	-	1	63	-	1	43	-	1	32	24	1	28	-	1	23	-	1
			70	-	1	51	-	1	33	-	1	29	-	1	26	-	1
			71	-	1	52	-	1	34	-	1	30	-	1	40	-	1
			72	-	1	53	-	1	35	-	1	31	-	1	41	-	1
			73	-	1	61	-	1	36	-	1	40	-	1	42	-	1
			80	-	1	62	-	1	37	-	1	41	-	1	43	33	1
			81	-	1	63	-	1	38	-	1	42	-	1	44	-	1
						71	-	1	39	-	1	50	-	1	45	-	1
						72	-	1	40	-	1	51	-	1	51	27	1
						73	-	1	41	-	1	52	-	1	52	-	1
						81	-	1	42	-	1	60	45	1	53	-	1
									49	26	1	61	-	1	61	-	1

Catalogue number index

Cat.Nos	Page	Pack	Cat.Nos	Page	Pack	Cat.Nos	Page	Pack	Cat.Nos	Page	Pack	Cat.Nos	Page	Pack	Cat.Nos	Page	Pack						
3 382 62	27	1	3 385 00			3 388 03	50	1	3 391 43	54	1	3 395 40	33	1	3 397 21	34	1						
63	-	1	3 385 00	27	1	04	-	1	45	-	1	41	-	1	30	56	1						
71	-	1				10	-	1	63	-	1	42	-	1	31	-	1						
72	-	1				12	-	1	65	-	1	43	-	1	34	-	1						
73	-	1				14	-	1	3 392 00	44	-	1	45	-	1	35	-	1					
81	-	1				41	-	1		46	-	1	36	-	1								
82	-	1				42	-	1		47	-	1	37	34	1								
83	-	1				43	-	1		48	-	1	51	33	1								
3 383 00						44	-	1		49	-	1	53	34	1								
3 383 00	28	1				50	-	1		52	-	1	50	-	1	54	-	20					
01	-	1				54	-	1		55	-	1	51	-	1	55	-	10					
03	-	1				61	-	1		61	-	1	60	-	1	56	-	10					
04	-	1				62	-	1		43	-	1	61	-	1	57	-	1					
06	-	1				64	-	1		45	-	1	62	-	1	58	-	1					
07	-	1				70	-	1		50	32	1	63	-	1	3 399 00							
20	-	1				72	-	1	60	-	1	64	-	1	3 399 00	34	1						
21	-	1	74			-	1	61	-	1	65	-	1	3 399 00				01	-	1			
23	-	1	3 386 00						62	-	1	02	-	1									
24	-	1	3 386 00	29	1	66	-	1	66	-	1	03	-	1									
25	-	1				67	-	1	67	-	1	04	-	1									
26	-	1				20	-	1	68	-	1	05	-	1									
27	-	1				21	-	1	69	-	1	06	-	1									
28	-	1				23	-	1	70	-	1	70	-	1				20	56	1			
50	-	1				24	-	1	22	-	1	71	-	1				21	-	1			
51	-	1				26	-	1	24	-	1	80	-	1				22	-	1			
53	-	1				27	-	1	42	-	1	81	-	1				23	-	1			
54	-	1				50	-	1	44	-	1	82	-	1				24	-	1			
56	-	1				51	-	1	3 389 00									83	-	1			
57	-	1				53	-	1	3 389 02	29	1							84	-	1			
80	-	1				54	-	1										22	-	1	85	-	1
81	-	1				56	-	1										24	-	1	86	-	1
82	-	1				57	-	1										41	-	1	87	-	1
86	30	1				70	-	1										43	-	1	88	-	1
87	-	1				71	-	1										50	-	1	89	-	1
88	-	1				73	-	1										52	-	1	90	-	1
89	-	1				74	-	1										54	-	1	91	-	1
90	-	1				76	-	1										60	-	1	92	-	1
91	-	1				77	-	1										61	-	1	93	-	1
92	-	1				3 387 00												62	-	1	94	-	1
93	-	1				3 387 00	30	1	63	-	1	95	-	1				95	-	1			
94	-	1							64	-	1	96	-	1				96	-	1			
3 384 00									65	-	1	3 393 00			80			-	1				
3 384 00	28	1	01						-	1	66	-	1	3 393 00	32	1	81	-	1				
01	-	1	03	-	1				67	-	1	01	-				1	82	-	1			
03	-	1	04	-	1				68	51	1	02	-				1	83	-	1			
04	-	1	06	-	1				69	-	1	20	-				1	84	-	1			
06	-	1	07	-	1				70	-	1	21	-				1	85	-	1			
07	-	1	20	-	1				71	-	1	22	-				1	86	-	1			
20	-	1	21	-	1				80	33	1	30	-				1	87	-	1			
23	-	1	24	-	1				81	-	1	31	-				1	88	-	1			
24	-	1	25	-	1				82	-	1	32	-				1	89	-	1			
25	-	1	27	-	1				83	-	1	50	-				1	90	-	1			
26	-	1	28	-	1				84	-	1	51	-				1	91	-	1			
27	-	1	50	-	1				85	-	1	52	-	1			92	-	1				
28	-	1	51	-	1				3 390 00						93	-	1						
50	-	1	53	-	1				3 390 02	31	1				94	-	1						
51	-	1	54	-	1										50	-	1	95	-	1			
53	-	1	56	-	1										51	-	1	96	-	1			
54	-	1	57	-	1										52	-	1	97	-	1			
56	-	1	58	-	1										54	-	1	98	-	1			
57	-	1	70	-	1										60	-	1	99	-	1			
80	30	1	71	-	1										61	-	1	3 396 00			3 396 00	33	1
81	-	1	73	-	1	62									-	1	10	47	1				
82	49	1	74	-	1	63	-	1							11	-	1						
83	-	1	75	-	1	64	-	1							12	49	1						
84	30	1	77	-	1	65	-	1	13		48	1											
85	-	1	78	-	1	66	-	1	14	50	1												
3 388 00						67	-	1	15	27	1												
3 388 01	50	1	01	-	1	68	-	1	16	48	1												
			02	-	1	69	-	1	17	-	1												
			03	-	1	70	-	1	18	44	1												
3 389 00						71	-	1	19	16	1	The information given in this catalogue (illustrations, characteristics and dimensions) may be amended, and therefore does not represent an undertaking on our part.											
3 390 00						72	-	1	20	47	1												
3 391 00						73	-	1	21	-	1												
3 391 01	54	1	03	-	1	74	-	1	22	49	1												
			05	-	1	75	-	1	23	-	1												
			20	-	1	76	-	1	24	48	1												
			23	-	1	77	-	1	3 397 00														
			25	-	1	78	-	1	3 397 00	33	1												
3 392 00						01	-	1															
3 393 00						02	-	1															
3 394 00						10	16	1															
3 395 00						11	26	1															
3 396 00						12	-	1															
3 397 00						13	44	1															
3 398 00						15	16	1															
3 399 00						16	26	1															
3 400 00						17	-	1															
3 401 00						18	44	1															



FOLLOW US ON

@ legrand.com

 youtube.com/user/legrand

 facebook.com/Legrand

 twitter.com/Legrand

 pinterest.com/legrandgroup

 instagram.com/legrandnews



Head Office

and International Department
87045 Limoges Cedex - France
Tel: +33(0)5 55 06 87 87
Fax: +33(0)5 55 06 74 55