



## Data Sheet | Item Number: 286-791

Optocoupler module; Nominal input voltage: 24 VDC; Output voltage range: 20 ... 60 VDC; Limiting continuous current: 0.1 A; 2-wire connection; Frequency: 3 kHz; Red status indicator; Module width: 10 mm; gray

<https://www.wago.com/286-791>

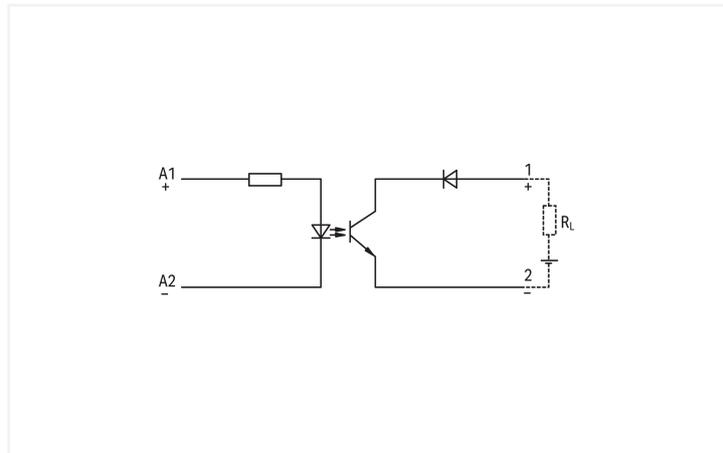

Color: ■ gray

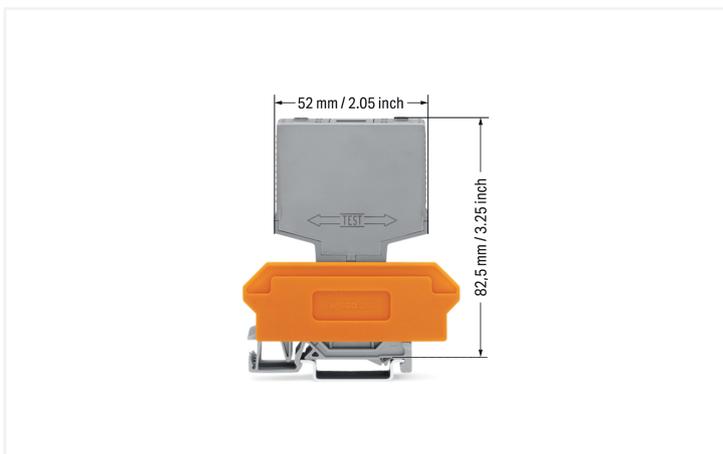

### Notes

Note

Optocouplers and solid state relays are designed for use in signal processing networks that are not supplied directly by the low-voltage power supply network.

### Technical data

#### Control circuit

Nominal input voltage $U_N$	24 VDC
Input voltage range (high level)	15 ... 30 VDC
Nominal input current at $U_N$	14 mA

#### Load circuit

Circuit type	2-wire connection
Limiting continuous current	0.1 A
Output voltage range	20 ... 60 VDC
Voltage drop	$\leq 2$ VDC
Leakage current at rated voltage	$\leq 2$ $\mu$ A
Turn-on time	$\leq 10$ $\mu$ s
Turn-off time	$\leq 50$ $\mu$ s
Switching frequency	$\leq 3$ kHz

### Safety and protection

Rated Voltage	300 V
Overvoltage category	II
Pollution degree	2
Dielectric strength (control/load circuit) (AC, 1 min)	2.5 kVrms
Insulation type (control/load circuit)	Basic insulation
Protection type	IP20

### Physical data

Width	10 mm / 0.394 inches
Height	52 mm / 2.047 inches
Depth from upper-edge of DIN-rail	82.5 mm / 3.25 inches
Note (dimensions)	Depth including carrier terminal block

### Mechanical data

Mounting type	Pluggable module for receptacle terminal blocks
---------------	---

### Material data

Note (material data)	<a href="#">Information on material specifications can be found here</a>
Color	gray
Fire load	0.276 MJ
Weight	15.3 g

### Environmental requirements

Ambient temperature (operation at $U_N$ )	-25 ... +40 °C
Ambient temperature (storage)	-25 ... +40 °C
Processing temperature	-25 ... +50 °C
Relative humidity	5 ... 95 % (no condensation permissible)
Operating altitude (max.)	2000 m

### Standards and Specifications

Standards/specifications	EN 61010-2-201 EN 61000-6-1 EN 61000-6-2 EN 61000-6-3
--------------------------	--

### Commercial data

Product Group	6 (INTERFACE ELECTRONIC)
PU (SPU)	25 (1) pcs
Packaging type	Box
Country of origin	DE
GTIN	4045454397470
Customs tariff number	85365005000

Product Classification	
UNSPSC	39121521
eCl@ss 10.0	27-26-15-03
eCl@ss 9.0	27-26-15-03
ETIM 9.0	EC001504
ETIM 10.0	EC001504
ECCN	NO US CLASSIFICATION

Environmental Product Compliance	
CAS-No.	1303-86-2 1317-36-8
REACH Candidate List Substance	Diboron trioxide Lead monoxide
RoHS Compliance Status	Compliant, No Exemption
SCIP notification number (Austria)	03324433-faeb-4ce2-afc3-bff2c6f116c3
SCIP notification number (Belgium)	5d6b7292-e4e6-4d27-858b-0287e49dbe07
SCIP notification number (Bulgaria)	8bd93a1a-3349-4a7b-b65f-c2bfc24af86
SCIP notification number (Czech Republic)	0c450226-b0a4-4a54-ae8-4b0458122d4c
SCIP notification number (Denmark)	50f275e7-9333-49f4-bb42-64aef9a1fccf
SCIP notification number (Finland)	a87073e2-7a0e-45b2-8631-2883d43d259b
SCIP notification number (France)	6769a1c1-d988-44a9-a1ed-cfe8f845e7d9
SCIP notification number (Germany)	66a127ae-0036-498c-b8f4-372fb5f0b883
SCIP notification number (Hungary)	7e99629b-c308-48ee-8e4a-cc0178d1fb66
SCIP notification number (Italy)	fff8c330-55b0-4078-a149-0c9261a735a7
SCIP notification number (Netherlands)	d0ecfb9e-4322-483b-8529-ca0b17f874b8
SCIP notification number (Poland)	40a94ff3-356d-4084-ae59-fb85ca7ebf86
SCIP notification number (Romania)	9a2b58d4-4095-4903-8391-1d7a024d5f95
SCIP notification number (Sweden)	179414c1-1552-47a0-b768-5de9eb74dcff

**Approvals / Certificates**

**General approvals**



Approval	Standard	Certificate Name
EAC GZO Almaty Standart	TP TC 020/2011	EAC CoC 03081

**Declarations of conformity and manufacturer's declarations**

Approval	Standard	Certificate Name
EU-Declaration of Confor- mity WAGO GmbH & Co. KG	-	-
UK-Declaration of Confor- mity WAGO GmbH & Co. KG	-	-

**Downloads**

**Environmental Product Compliance**

Compliance Search
Environmental Product Compliance 286-791

## Documentation

Bid Text			
286-791	19.02.2019	xml 3.67 KB	<a href="#">↓</a>
286-791	20.02.2019	docx 15.36 KB	<a href="#">↓</a>

Instruction Leaflet			
Operation and Assembly Instructions Interface	V 1.0.0 02.04.2025	pdf 1246.19 KB	<a href="#">↓</a>

## CAD/CAE-Data

CAD data
2D/3D Models 286-791 <a href="#">↓</a>

CAE data
WSCAD Universe 286-791 <a href="#">↓</a>
ZUKEN Portal 286-791 <a href="#">↓</a>

## 1 Compatible Products

### 1.1 Optional Accessories

#### 1.1.1 Marking

##### 1.1.1.1 Marker



**Item No.: 209-701**

WSB marking card; as card; not stretchable; plain; snap-on type; white

### 1.1.2 Terminal blocks

#### 1.1.2.1 Terminal block for pluggable modules



**Item No.: 280-618**

Terminal block for pluggable modules; 4-pole; with 2-conductor terminal blocks; with orange separator; for DIN-rail 35 x 15 and 35 x 7.5; 2.5 mm<sup>2</sup>; CAGE CLAMP®; 2,50 mm<sup>2</sup>; gray



**Item No.: 280-762**

Terminal block for pluggable modules; 4-pole; with 4-conductor terminal blocks; with marker carrier; with orange separator; for DIN-rail 35 x 15 and 35 x 7.5; 2.5 mm<sup>2</sup>; CAGE CLAMP®; 2,50 mm<sup>2</sup>; gray



**Item No.: 280-608**

Terminal block for pluggable modules; 4-pole; with 4-conductor terminal blocks; with orange separator; for DIN-rail 35 x 15 and 35 x 7.5; 2.5 mm<sup>2</sup>; CAGE CLAMP®; 2,50 mm<sup>2</sup>; gray

## Installation Notes

### Installation



Coding ensures correct polarity.



Pluggable electronic modules on 2- or 4-conductor carrier terminal blocks

## Marking



Marking via WMB Multi Marking System.

## Testing



Function testing via touch-proof test slots