


OptiClip Accessories OPTICLIP LIGHT E 830 2DC WH 0044038

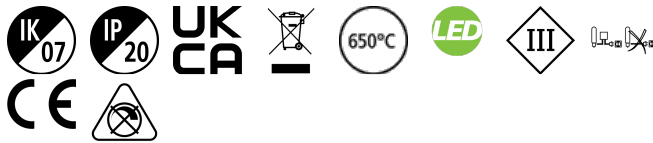

PRODUCT OVERVIEW

Product name	OPTICLIP LIGHT E 830 2DC WH
Technology	LED
Cap/Base	N/A
Mount	Ceiling recessed mounting
Warranty	5 years
Fixture luminous flux (lm)	1900
Colour temperature (K)	3000
Light colour	Warm White
CRI (Ra)	80
Colour Variation Initial (SDCM)	SDCM5
Photobiological Risk Group	RG1
Total power consumption (W)	15
Electrical protection	Class III
Control gear type	LED driver constant current
IP rating	IP20
IK rating	IK07
Product EAN number	5410288440385


PHOTOMETRY

Distance (m)	Cone diameter (m)	E07 E(C0) E(C2)	170° 165° 160°
0.5	0.50 0.55	44.7° 43.8°	325 342
1.0	1.00 1.10	44.7° 43.8°	163 171
1.5	1.50 1.65	44.7° 43.8°	110 117
2.0	2.00 2.20	44.7° 43.8°	82 88
2.5	2.50 2.75	44.7° 43.8°	64 69
3.0	3.00 3.30	44.7° 43.8°	51 55


Distance (m) Cone diameter (m) Illuminance (lx)

— C0 - C180 (Half beam angle: 90°)

— C90 - C270 (Half beam angle: 90°)




OptiClip Accessories OPTICLIP LIGHT E 830 2DC WH 0044038






Distance [m]	Cone diameter [m]	illuminance [lx]
0.5	0.99	2000
1.0	1.98	497
1.5	2.97	292
2.0	3.96	198
2.5	4.95	158
3.0	5.94	111

Distance [m]	Cone diameter [m]	illuminance [lx]
0.5	0.99	2198
1.0	1.98	548
1.5	2.97	344
2.0	3.96	255
2.5	4.95	199
3.0	5.94	133



Distance [m]	Cone diameter [m]	illuminance [lx]
0.5	0.99	3000
1.0	1.98	750
1.5	2.97	450
2.0	3.96	338
2.5	4.95	264
3.0	5.94	189

Distance [m]	Cone diameter [m]	illuminance [lx]
0.5	0.99	3198
1.0	1.98	799
1.5	2.97	479
2.0	3.96	359
2.5	4.95	284
3.0	5.94	200



Distance [m]	Cone diameter [m]	illuminance [lx]
0.5	0.99	3398
1.0	1.98	849
1.5	2.97	509
2.0	3.96	379
2.5	4.95	299
3.0	5.94	210

OptiClip Accessories *OPTICLIP LIGHT E 830 2DC WH* 0044038

