

## Beacon LED XXL - High Output

BEACON XXL MB HO 3K L3 BLK  
2059311



### Product features

- 2059311 BEACON XXL MB HO 3K L3 BLK Integrated LED spotlight, black RAL 9005, compact and minimalist design, ideal for double height spaces, retail and display applications, die-cast aluminium body, passive cooling heatsink, beam angle: 50° medium beam, optics: Silicone lens for controlled beam, colour temperature: 3000K warm white, total system power: 48W, total fixture output: 4269lm, luminaire efficacy: 89lm/W, LOR: 100%, colour rendering: Ra 85 typical, LED Chromacity: 3 step MacAdam ellipse, IR/UV free light source without heat radiation, operating voltage: 220-240V / 50-60Hz, drive current: 1200mA, electronic driver, non-dimmable, switched only, power factor: 0.98 electrical protection: CLASS I, 3-circuit track adaptor, suitable for Concord Lytespan 3 track, ingress protection rating: IP20, suitable for internal environment only, horizontal rotation: 355°, vertical tilt: 90°, lockable positioning using Allen key, dimensions Ø113x168x205mm




### PRODUCT OVERVIEW

Product name	BEACON XXL MB HO 3K L3 BLK
Technology	LED
Cap/Base	N/A
Housing	Aluminium
Mount	Track mounting
Environment	Internal
General application	Retail
ETIM Class	EC001744
E-number FI	4278857
E-number SE	7401269
Warranty	5 years
Useful luminous flux (Fuse)	4269
Fixture luminous flux (lm)	4269
Luminaire efficacy (lm/W)	88.94
LOR (%)	100
Correlated colour temperature (k)	3000
Light colour	Warm White
CRI (Ra)	85
Colour Consistency (SDCM)	3
Beam Angle (°)	50
Photobiological Risk Group	RG1
Total power consumption (W)	48
Electrical protection	Class I
Control gear type	Electronic ballast
Dimmable	No
Dimming method	N/A
Housing colour	Black
IP rating	IP20
Product EAN number	5025768593118

## Beacon LED XXL - High Output

*BEACON XXL MB HO 3K L3 BLK*  
2059311

### PHOTOMETRY

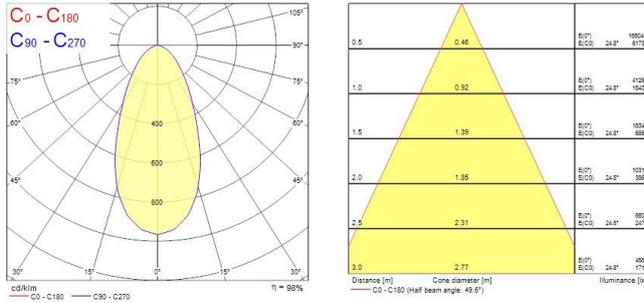

### TECHNICAL DRAWINGS

