

ToLEDo Retro T25

ToLEDo RT T25 V5 CL 250LM 827 E14 SL

0029541



Product features

- Perfect for decorative and general lighting applications and creates a warm ambiance similar to traditional lamps
- ToLEDo Retro T25 lamp is the ideal replacement for incandescent cooker hood lamps
- Same look, size and functionality as incandescent lamps
- Omni-directional light distribution
- Gives same sparkling light effect as incandescent lamp
- Dimensionally identical to incandescent lamps - fits all fixtures
- Environment friendly - no mercury and lower CO2 emissions



PRODUCT OVERVIEW

Product name	ToLEDo RT T25 V5 CL 250LM 827 E14 SL
Technology	LED
Watt (Rated) (W)	2.5
Type	LED exchangeable
Cap/Base	E14
Fixture rating	Open
General application	Hospitality, Residential & Consumer
ETIM Class	EC001959
E-number FI	4740958
Warranty	3 years
Luminous flux (lm)	250
Colour temperature (K)	2700
Light colour	Homelight
CRI (Ra)	80

ToLEDo Retro T25

ToLEDo RT T25 V5 CL 250LM 827 E14 SL

0029541

Colour Variation Initial (SDCM)	SDCM6
Photobiological Risk Group	RG1
Wattage (W)	2.5
Dimmable	No
Average life (Nominal) (h)	15000
Product EAN number	5410288295411

DATA TABLE

General data

Product name	ToLEDo RT T25 V5 CL 250LM 827 E14 SL
Technology	LED
Watt (Rated) (W)	2.5
Type	LED exchangeable
Cap/Base	E14
Fixture rating	Open
General application	Hospitality, Residential & Consumer
Operating temperature range (°C)	-20°C...+40°C
Performance ambient temperature Tq (°C)	25
ETIM Class	EC001959
E-number FI	4740958
Warranty	3 years

Optical data

Luminous flux (lm)	250
Luminous flux (Rated) (lm)	250
Colour temperature (K)	2700
Light colour	Homelight
CRI (Ra)	80
Colour Variation Initial (SDCM)	SDCM6
Photobiological Risk Group	RG1
Lumen maintenance at end of nominal life (%)	70

Electrical data

Wattage (W)	2.5
Equivalent watt (W)	25
Primary Supply/Product voltage - min (V)	220
Primary Supply/Product voltage - max (V)	240
Control gear required	No
No. Of switching cycles before premature failures	>50000
Dimmable	No
Inrush Current (A)	5.9
Inrush Duration (µs)	180
Lamp Energy Label (class)	F
Nominal Frequency (Hz)	50/60Hz
Max. products per 16A C Breaker	27

ToLEDo Retro T25

ToLEDo RT T25 V5 CL 250LM 827 E14 SL

0029541

Max. products per 16A B Breaker	14
---------------------------------	----

Lifetime data

Lifespan L70 B50	15000
Average life (Nominal) (h)	15000
Average life (Rated) (h)	15000

Physical data

Nominal Product Length (mm)	90
Nominal Product Diameter (mm)	25
Weight (kg)	0.021


Packaging

Single packaging type	Carton
Product EAN number	5410288295411
Packaging single length / height (cm)	11.0
Packaging single width (cm)	4.5
Packaging single depth (cm)	4.5
DUN14 (outer)	15410288295418
Units per outer package	6
Packaging outer length / height (cm)	14.3
Packaging outer width (cm)	9.7
Packaging outer depth (cm)	12.0

Safety data

Optimal operating condition (°C)	-20-40
Breakage cleaning instructions	Not applicable
Special purpose lamp	No
Dry applications use only	Yes
Suitable for household illumination	Yes
Safety message	Not Suitable for totally enclosed fixtures


PHOTOMETRY

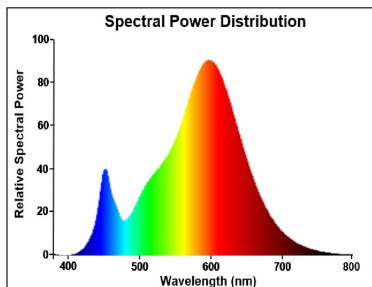


ToLEDo Retro T25

ToLEDo RT T25 V5 CL 250LM 827 E14 SL
0029541

TECHNICAL DRAWINGS



0029541

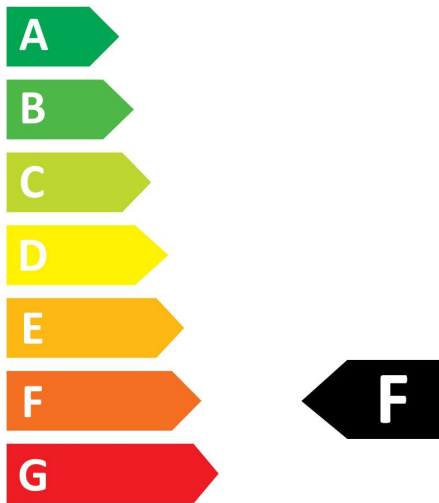

3
kWh/1000h



2019/2015

SYLVANIA


ToLEDo Retro T25

ToLEDo RT T25 V5 CL 250LM 827 E14 SL

0029541



0029541

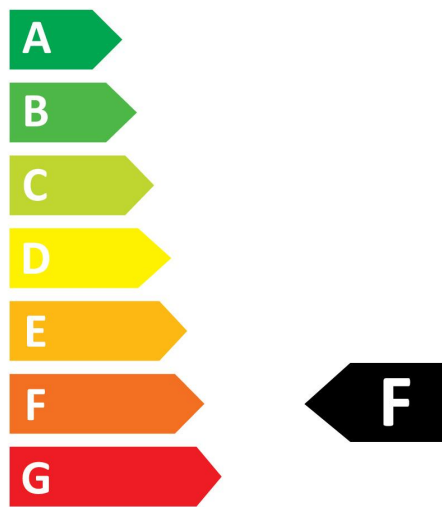

3
kWh/1000h



2019/2015