



Features

- Logistics and Industry high bay luminaire with Aisle optics to provide necessary illumination for narrow areas, comes complete with 2000mm flying lead and 1000mm suspension cable, aluminium housing, PC diffuser, IP65, IK08, Class I, 4000K, CRI80, 3 step MacAdam ellipse, DALI dimmable, 20500lm, 112W, 183lm/W, 105.000hrs L80B50 lifespan, 446 x 481 x 86mm (LxWxD) dimensions, 4.68kg weight, RAL7012 Basalt Grey color, -30...+50°C operating temperature range. Ball-impact-resistance according to DIN57710-13 VDE 0710 13/5.81, DIN 18032-3.

Product Overview


Product name	Rocks IP65 20KLM 840 AISLE DALI
Technology	LED (3 SDCM)
Cap/Base	N/A
Housing	Aluminium
Mount	Suspended
General application	Logistics & Industry
ETIM Class	EC001716
E-number FI	4327129
Fixture luminous flux (lm)	20500
Luminaire efficacy (lm/W)	183
Correlated colour temperature (k)	4000
Light colour	Neutral White
CRI (Ra)	80
Colour Consistency (SDCM)	3
Colour Variation Initial (SDCM)	3
Glare control	< 22
Photobiological Risk Group	RG1
Total power consumption (W)	112

Concord

Rocks IP65 20KLM 840 AISLE DALI 2825405

Electrical protection	Class I
Control gear type	LED driver constant current
Dimmable	Yes
Housing colour	Grey
IP rating	IP65
IK rating	IK08
Product EAN number	5025768254057
Warranty	5 years
Dimming method	DALI-2

Photometry

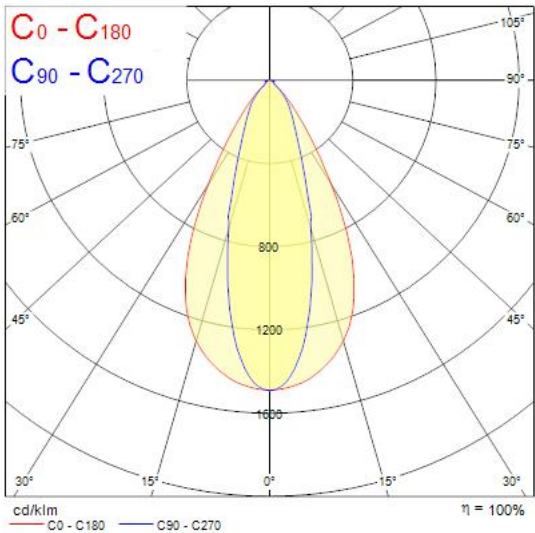

Technical drawings

