

ToLEDo Retro G120

ToLEDo RT G125 V5 CL 1055LM 827 E27 SL

0029545



Product features

- Perfect for decorative and general lighting applications and creates a warm ambiance similar to traditional lamps
- Same look, size and functionality as incandescent lamps
- Omni-directional light distribution
- Suitable replacement for incandescent and halogen lamps
- Gives same sparkling light effect as incandescent lamp
- Dimensionally identical to incandescent lamps - fits all fixtures
- Environment friendly - no mercury and lower CO2 emissions



PRODUCT OVERVIEW

Product name	ToLEDo RT G125 V5 CL 1055LM 827 E27 SL
Technology	LED
Watt (Rated) (W)	8
Type	LED exchangeable
Cap/Base	E27
Fixture rating	Open
General application	Hospitality, Residential & Consumer
ETIM Class	EC001959
E-number FI	4740962
Warranty	3 years
Luminous flux (lm)	1055
Colour temperature (K)	2700
Light colour	Homelight
CRI (Ra)	80
Colour Variation Initial (SDCM)	SDCM6
Photobiological Risk Group	RG1
Wattage (W)	8
Dimmable	No
Average life (Nominal) (h)	15000
Product EAN number	5410288295459

DATA TABLE

General data

Product name	ToLEDo RT G125 V5 CL 1055LM 827 E27 SL
Technology	LED
Watt (Rated) (W)	8
Type	LED exchangeable
Cap/Base	E27
Fixture rating	Open
General application	Hospitality, Residential & Consumer
Operating temperature range (°C)	-20°C...+40°C

ToLEDo Retro G120

ToLEDo RT G125 V5 CL 1055LM 827 E27 SL
0029545

Performance ambient temperature Tq (°C)	25
ETIM Class	EC001959
E-number FI	4740962
Warranty	3 years

Optical data

Luminous flux (lm)	1055
Luminous flux (Rated) (lm)	1055
Colour temperature (K)	2700
Light colour	Homelight
CRI (Ra)	80
Colour Variation Initial (SDCM)	SDCM6
Photobiological Risk Group	RG1
Lumen maintenance at end of nominal life (%)	70

Electrical data

Wattage (W)	8
Equivalent watt (W)	75
Primary Supply/Product voltage - min (V)	220
Primary Supply/Product voltage - max (V)	240
Control gear required	Yes
No. Of switching cycles before premature failures	>50000
Dimmable	No
Inrush Current (A)	4.36
Inrush Duration (µs)	150
Lamp Energy Label (class)	E
Nominal Frequency (Hz)	50/60Hz
Max. products per 16A C Breaker	37
Max. products per 16A B Breaker	18

Lifetime data

Lifespan L70 B50	15000
Average life (Nominal) (h)	15000
Average life (Rated) (h)	15000

Physical data

Nominal Product Length (mm)	178
Nominal Product Diameter (mm)	125
Weight (kg)	0.135

Packaging

Single packaging type	Carton
Product EAN number	5410288295459
Packaging single length / height (cm)	19.0
Packaging single width (cm)	13.0
Packaging single depth (cm)	13.0

ToLEDo Retro G120

ToLEDo RT G125 V5 CL 1055LM 827 E27 SL


0029545

DUN14 (outer)	15410288295456
Units per outer package	6
Packaging outer length / height (cm)	20.0
Packaging outer width (cm)	80.3
Packaging outer depth (cm)	13.5


Safety data

Optimal operating condition (°C)	-20-40
Breakage cleaning instructions	Not applicable
Special purpose lamp	No
Dry applications use only	Yes
Suitable for household illumination	Yes
Safety message	Not Suitable for totally enclosed fixtures

PHOTOMETRY

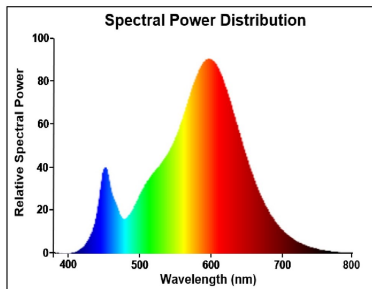

TECHNICAL DRAWINGS



SYLVANIA


ToLEDo Retro G120

ToLEDo RT G125 V5 CL 1055LM 827 E27 SL
0029545



SYLVANIA

0029545

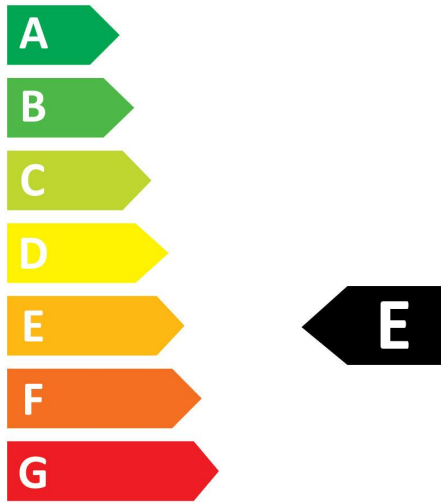

8
kWh/1000h



2019/2015

SYLVANIA


ToLEDo Retro G120

ToLEDo RT G125 V5 CL 1055LM 827 E27 SL

0029545



0029545

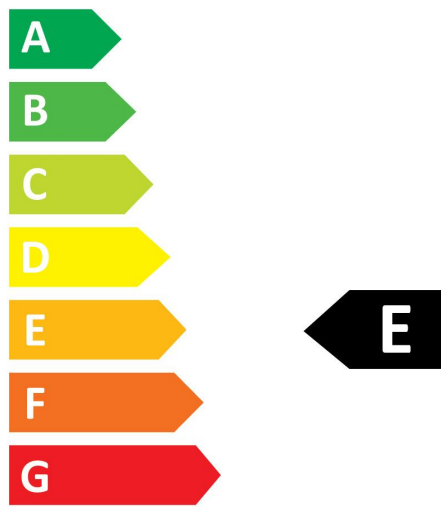

8
kWh/1000h



2019/2015