


RF-BW-T CEILING BASE WITH WIRELESS INTERLINK

Battery Type	10yr lithium battery
--------------	----------------------

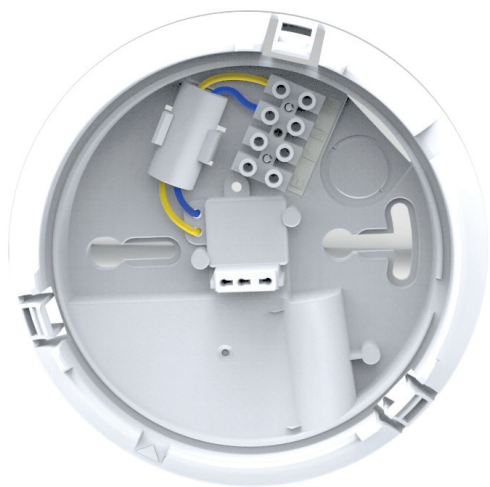

The RF base provides a wireless interlink between mains powered smoke, heat & CO alarms; it is quick to install and quick to link, ensuring greater output and savings. The base unit has been designed to transmit an RF signal, when the alarm attached to it senses fire or CO. When another RF base receives this signal the attached alarm will also sound, eliminating the need for connection wires between each alarm.

- 10yr lithium battery
- “Push2fit” docking base system
- Automatic ID coding
- Multiple repeater RF signalling
- RF transmitter and receiver in each base unit
- Interlink up to 12 smoke, heat & CO alarms
- 5 year warranty

**Push-Fit Base**  
Easy to install  
just click in place

Technical Specification

Dimensions	139.6mm (Diameter) x 38.9mm (Depth)	
Battery	10 year lithium battery	
Operating frequency	868MHz	
Installation positions	Ceiling	
Operating temperature	+4°C to +38°C	
Operating humidity	Up to 90% RH non-condensing	
Storage temperature	-20°C to +60°C	
Storage humidity	Up to 93% RH non-condensing	
Plastic material	ABS, UL94 VO fire retardant	
Warranty	5 years	
Master pack quantity	10	
Weight	145g	
Maximum number of connected units	Wireless interlink for up to 50 smoke, heat and carbon monoxide alarms	
Operational Life	Minimum of 10 years	