

Component terminal block; 3-conductor; with diode 1N4007; anode, left side; for DIN-rail 35 x 15 and 35 x 7.5; 2.5 mm²; Push-in CAGE CLAMP[®]; 2,50 mm²; gray




https://www.wago.com/2202-1311/1000-410

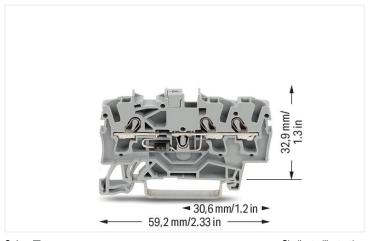

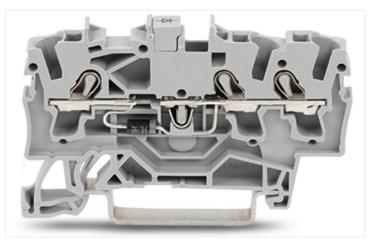

Similar to illustration

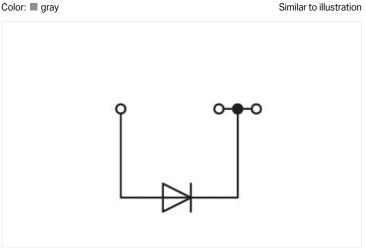

Similar to illustration 2002-1311/1000-410

Electrical data

General information		
Nominal voltage	250 V	
Reverse voltage	1000 V	
Continuous current (max.)	500 mA	

Connection data Clamping units 3 Total number of potentials 1 Number of levels 1 Number of jumper slots 1

Connection 1	
Connection technology	Push-in CAGE CLAMP®
Actuation type	Push-button
Connectable conductor materials	Copper
Nominal cross-section	2.5 mm ²
Solid conductor	0.25 4 mm² / 22 12 AWG
Solid conductor; push-in termination	0.75 4 mm² / 18 12 AWG
Fine-stranded conductor	0.25 4 mm² / 22 12 AWG
Fine-stranded conductor; with insulated ferrule	0.25 2.5 mm² / 22 14 AWG
Fine-stranded conductor; with ferrule; push-in termination	1 2.5 mm² / 18 14 AWG

https://www.wago.com/2202-1311/1000-410



Connection 1

Note (conductor cross-section) Depending on the conductor characteri-

stic, a conductor with a smaller crosssection can also be inserted via push-in

termination.

Strip length $10 \dots 12 \text{ mm / } 0.39 \dots 0.47 \text{ inches}$

Wiring direction Front-entry wiring

Physical data		
Width	5.2 mm / 0.205 inches	
Height	59.2 mm / 2.33 inches	
Depth from upper-edge of DIN-rail	32.9 mm / 1.295 inches	

Mechanical data	
Mounting type	DIN-35 rail
Marking level	Center/side marking

Material data	
Note (material data)	
	<u>Information on material specifications can be found here</u>
Color	gray
Material group	1
Insulation material (main housing)	Polyamide (PA66)
Flammability class per UL94	VO
Fire load	0.175 MJ
Weight	7.9 g

Processing temperature	-35 +85 °C	Environmental Testing (Enviror	mental Conditions)
Continuous operating temperature -60 +105 °C	Test specification Railway applications – Rolling stock – Electronic equipment	DIN EN 50155 (VDE 0115-200):2022-06	
	Test procedure Railway applications – Rolling stock equipment – Shock and vibration tests	DIN EN 61373 (VDE 0115-0106):2011-0	
	Spectrum/Installation location	Service life test, Category 1, Class A/B	
	Function test with noise-like vibration	Test passed according to Section 8 of the standard	
	Frequency	$f_1 = 5 \text{ Hz to } f_2 = 150 \text{ Hz}$ $f_1 = 5 \text{ Hz to } f_2 = 150 \text{ Hz}$	
	Acceleration	0.101g (highest test level used for all axes) 0.572g (highest test level used for all axes) 5g (highest test level used for all axes)	
		Test duration per axis	10 min. 5 h
	Test directions	X, Y and Z axes X, Y and Z axes X, Y and Z axes	
	Monitoring for contact faults/interrup ons	i- Passed	
	Voltage drop measurement before an after each axis	d Passed	
	Simulated service life test through inc	re- Test passed according to Section 9 of the standard	

Data Sheet | Item Number: 2202-1311/1000-410 https://www.wago.com/2202-1311/1000-410



Environmental Testing (Environmental Conditions)		
Extended test scope: Monitoring for contact faults/interruptions	Passed Passed	
Extended test scope: Voltage drop measurement before and after each axis	Passed Passed	
Shock test	Test passed according to Section 10 of the standard	
Shock form	Half sine	
Shock duration	30 ms	
Number of shocks per axis	3 pos. und 3 neg.	
Vibration and shock stress for rolling stock equipment	Passed	

Commercial data	
PU (SPU)	100 pcs
Packaging type	Box
Country of origin	DE
GTIN	4066966324273
Customs tariff number	85369010000

Environmental Product Compliance	
CAS-No.	7439-92-1 79-94-7
REACH Candidate List Substance	2,2',6,6'-tetrabromo-4,4'-isopropylidenediphenol Lead
RoHS Compliance Status	Compliant, With Exemption
RoHS Exemption	7(a) 7(c)-I 7(c)-II
SCIP notification number (Austria)	c34f862e-4e8f-499c-a78b-72c203fa0838
SCIP notification number (Belgium)	fbb08ad9-b28b-4a0b-81d3-9444ff0aecf6
SCIP notification number (Czech Republic)	15601ca9-b5a0-4fd7-872d-8b9e5ed82d92
SCIP notification number (Denmark)	1441369b-c6cb-4a9c-9265-7d8e330082c1
SCIP notification number (Finland)	3e72fc13-0132-4f34-a3af-29420cf9cf70
SCIP notification number (Germany)	4554b5e3-9a6c-49cd-b6b5-9a0463be7a86
SCIP notification number (Netherlands)	84eec7c4-58d1-482b-8d7a-e57d989f200a
SCIP notification number (Poland)	7c638a8f-dda7-4731-afd0-6b799e8b22ea
SCIP notification number (Romania)	798e94f6-9f45-4c16-a5c7-e79529ac139c
SCIP notification number (Sweden)	e4a08726-c1ed-4ae6-a9ef-1baa0dc3fcba

Approvals / Certificates

Declarations of conformity and manufacturer's declarations



Approval	Standard	Certificate Name
Railway WAGO GmbH & Co. KG	-	Z00004404.000

https://www.wago.com/2202-1311/1000-410



Downloads

Environmental Product Compliance

Compliance Search

Environmental Product Compliance 2202-1311/1000-410



Documentation

Additional Information

Technical Section

2246.92 KB



1 Compatible Products

1.1 Required Accessories

1.1.1 End plate

1.1.1.1 End plate





Item No.: 2002-1391

End and intermediate plate; 0.8 mm thick; gray

Item No.: 2002-1392

End and intermediate plate; 0.8 mm thick; orange

1.2 Optional Accessories

1.2.1 DIN-rail

1.2.1.1 Mounting accessories





Item No.: 210-198

Copper carrier rail; 35 x 15 mm; 2.3 mm thick; 2 m long; unslotted; according to EN 60715; copper-colored

Item No.: 210-508

Steel carrier rail; 35 x 15 mm; 1.5 mm thick; 2 m long; slotted; galvanized; similar to EN 60715; silver-colored

Item No.: 210-197

Steel carrier rail; 35×15 mm; 1.5 mm thick; 2 m long; slotted; similar to EN 60715; silver-colored



Aluminum carrier rail; 35 x 8.2 mm; 1.6 mm

thick; 2 m long; unslotted; similar to EN

Item No.: 210-506

60715; silver-colored

Steel carrier rail; 35 x 15 mm; 1.5 mm thick; 2 m long; unslotted; galvanized; similar to EN 60715; silver-colored

Item No.: 210-114

Steel carrier rail; 35 x 15 mm; 1.5 mm thick; 2 m long; unslotted; similar to EN 60715; silver-colored

Item No.: 210-118

Steel carrier rail; 35 x 15 mm; 2.3 mm thick; 2 m long; unslotted; according to EN 60715; silver-colored

Item No.: 210-115

Steel carrier rail; 35 x 7.5 mm; 1 mm thick; 2 m long; slotted; according to EN 60715; "Hole width 18 mm; silver-colored



Item No.: 210-112

Steel carrier rail; 35 x 7.5 mm; 1 mm thick; 2 m long; slotted; according to EN 60715; "Hole width 25 mm; silver-colored

Item No.: 210-504

Steel carrier rail; 35 x 7.5 mm; 1 mm thick; 2 m long; slotted; galvanized; according to EN 60715; silver-colored

Item No.: 210-113

Steel carrier rail; 35 x 7.5 mm; 1 mm thick; 2 m long; unslotted; according to EN 60715; silver-colored

Item No.: 210-505

Steel carrier rail; 35 x 7.5 mm; 1 mm thick; 2 m long; unslotted; galvanized; according to EN 60715; silver-colored

https://www.wago.com/2202-1311/1000-410



1.2.2 End plate

1.2.2.1 End plate





Item No.: 2002-1393

Seperator plate; 2 mm thick; oversized; gray

Item No.: 2002-1394

Seperator plate; 2 mm thick; oversized;

1.2.3 Ferrule

1.2.3.1 Ferrule

Item No.: 216-241
Ferrule; Sleeve for 0.5 mm² / 20 AWG; insulated; electro-tin plated; electrolytic copper; gastight crimped; acc. to DIN 46228, Part 4/09.90; white



Ferrule; Sleeve for 0.75 mm² / 18 AWG; insulated; electro-tin plated; electrolytic copper; gastight crimped; acc. to DIN 46228, Part 4/09.90; gray

Item No.: 216-262

Ferrule; Sleeve for 0.75 mm² / 18 AWG; insulated; electro-tin plated; electrolytic copper; gastight crimped; acc. to DIN 46228, Part 4/09.90; gray

Item No.: 216-243

Ferrule; Sleeve for 1 mm² / AWG 18; insulated; electro-tin plated; electrolytic copper; gastight crimped; acc. to DIN 46228, Part 4/09.90; red



Item No.: 216-263

Ferrule; Sleeve for 1 mm² / AWG 18; insulated; electro-tin plated; electrolytic copper; gastight crimped; acc. to DIN 46228, Part 4/09.90; red

Item No.: 216-244

Ferrule; Sleeve for 1.5 mm² / AWG 16; insulated; electro-tin plated; electrolytic copper; gastight crimped; acc. to DIN 46228, Part 4/09.90; black

Item No.: 216-264

Ferrule; Sleeve for 1.5 mm² / AWG 16; insulated; electro-tin plated; electrolytic copper; gastight crimped; acc. to DIN 46228, Part 4/09.90; black

Item No.: 216-246

Ferrule; Sleeve for 2.5 mm² / AWG 14; insulated; electro-tin plated; electrolytic copper; gastight crimped; acc. to DIN 46228, Part 4/09.90; blue



Item No.: 216-266

Ferrule; Sleeve for 2.5 mm² / AWG 14; insulated; electro-tin plated; electrolytic copper; gastight crimped; acc. to DIN 46228, Part 4/09.90; blue

1.2.4 Installation

1.2.4.1 Cover



Item No.: 709-156

Cover; Type 3; suitable for cover carrier, type 3; 1 m long; transparent

1.2.4.2 Cover carrier



Item No.: 709-169

Cover carrier; Type 3; incl. fixing/retaining screws and knurled nut; suitable for 279 to 282 and 880 Series rail-mounted terminal blocks; suitable for 264 Series miniature rail-mounted terminal blocks; suitable for 270 Series sensor and actuator terminal blocks; gray



1.2.5 Insulation stop

1.2.5.1 Insulation stop





Item No.: 2002-171

Insulation stop; 0.25 - 0.5 mm²; 5 pieces/ strip; light gray

Item No.: 2002-172

Insulation stop; 0.75 - 1 mm²; 5 pieces/ strip; dark gray

1.2.6 Jumper

1.2.6.1 Jumper

Item No.: 2002-400

gray



Continuous jumper; 2-way; insulated; light



Continuous jumper; from 1 to 3; insulated; blue

Item No.: 2002-423

Continuous jumper; from 1 to 3; insulated; light gray

Item No.: 2002-423/000-005 Continuous jumper; from 1 to 3; insulated;



Item No.: 2002-424/000-006 Continuous jumper; from 1 to 4; insulated; blue

Item No.: 2002-424

Continuous jumper; from 1 to 4; insulated; light gray

Item No.: 2002-424/000-005 Continuous jumper; from 1 to 4; insulated;

Item No.: 2002-406/020-000

red





Item No.: 2002-410/000-006

Jumper; 10-way; insulated; blue

Item No.: 2002-410

Jumper; 10-way; insulated; light gray

Item No.: 2002-410/000-005

Jumper; 10-way; insulated; red

Delta jumper; insulated; light gray

Item No.: 2002-402/000-006 Jumper; 2-way; insulated; blue

red



Item No.: 2002-402

Jumper; 2-way; insulated; light gray

Item No.: 2002-402/000-005

Jumper; 2-way; insulated; red

Item No.: 2002-403/000-006 Jumper; 3-way; insulated; blue Item No.: 2002-403

Jumper; 3-way; insulated; light gray



Item No.: 2002-403/000-005

Jumper; 3-way; insulated; red



Item No.: 2002-404/000-006

Jumper; 4-way; insulated; blue

Item No.: 2002-404

Item No.: 2002-404/000-005





Jumper; 4-way; insulated; light gray

Jumper; 4-way; insulated; red

Item No.: 2002-406/000-006

Item No.: 2002-405/000-006 Jumper; 5-way; insulated; blue

Item No.: 2002-405

Jumper; 5-way; insulated; light gray

Item No.: 2002-405/000-005

Jumper; 5-way; insulated; red

Jumper; 6-way; insulated; blue



Item No.: 2002-406 Jumper; 6-way; insulated; light gray

Item No.: 2002-407/000-006

Item No.: 2002-407 Jumper; 7-way; insulated; light gray



Item No.: 2002-407/000-005

Jumper; 6-way; insulated; red

Item No.: 2002-406/000-005

Jumper; 7-way; insulated; blue



Jumper; 7-way; insulated; red

Item No.: 2002-408/000-006

Item No.: 2002-408

Jumper; 8-way; insulated; light gray



Jumper; 8-way; insulated; blue

Jumper; 8-way; insulated; red



Item No.: 2002-409/000-006 Jumper; 9-way; insulated; blue Item No.: 2002-409

Item No.: 2002-434

Jumper; 9-way; insulated; light gray

Item No.: 2002-409/000-005 Jumper; 9-way; insulated; red Item No.: 2002-440

Jumper; from 1 to 10; insulated; light gray



Item No.: 2002-433

Jumper; from 1 to 3; insulated; light gray

Jumper; from 1 to 4; insulated; light gray

Item No.: 2002-435 Jumper; from 1 to 5; insulated; light gray

Item No.: 2002-436 Jumper; from 1 to 6; insulated; light gray



Item No.: 2002-437

Jumper; from 1 to 7; insulated; light gray


Item No.: 2002-438 Jumper; from 1 to 8; insulated; light gray

Item No.: 2002-439

Item No.: 2002-480 Staggered jumper; 10-way; insulated; light

Continued on next page





https://www.wago.com/2202-1311/1000-410

1.2.6.1 Jumper









Item No.: 2002-481

Staggered jumper; 11-way; insulated; light gray

Item No.: 2002-482

Staggered jumper; 12-way; insulated; light gray

Item No.: 2002-472

Staggered jumper; 2-way; insulated; light gray

Item No.: 2002-473

Staggered jumper; 3-way; insulated; light gray





Item No.: 2002-474

Staggered jumper; 4-way; insulated; light gray

Item No.: 2002-475

Staggered jumper; 5-way; insulated; light

Item No.: 2002-476

Staggered jumper; 6-way; insulated; light

Item No.: 2002-477

Staggered jumper; 7-way; insulated; light



Item No.: 2002-478

Staggered jumper; 8-way; insulated; light gray

Item No.: 2002-479 Staggered jumper; 9-way; insulated; light gray

Item No.: 2002-405/011-000

Star point jumper; 3-way; insulated; light gray

Item No.: 210-103

Wire commoning chain; insulated; black

Item No.: 210-123

Wire commoning chain; insulated; blue

1.2.7 Marking

1.2.7.1 Group marker carrier







Item No.: 2009-191

Group marker carrier; gray

Item No.: 2009-192

Group marker carrier; gray

Item No.: 2009-193

Group marker carrier; gray

1.2.7.2 Marker

Item No.: 2009-145/000-006

Mini-WSB Inline; for Smart Printer; 1700 pieces on roll; stretchable 5 - 5.2 mm; plain; snap-on type; blue

Item No.: 2009-145/000-007

Mini-WSB Inline; for Smart Printer; 1700 pieces on roll; stretchable 5 - 5.2 mm; plain; snap-on type; gray

Item No.: 2009-145/000-023

Mini-WSB Inline; for Smart Printer; 1700 pieces on roll; stretchable 5 - 5.2 mm; plain; snap-on type; green

Item No.: 2009-145/000-012

Mini-WSB Inline; for Smart Printer; 1700 pieces on roll; stretchable 5 - 5.2 mm; plain; snap-on type; orange

Item No.: 2009-145/000-005

Mini-WSB Inline; for Smart Printer; 1700 pieces on roll; stretchable 5 - 5.2 mm; plain; snap-on type; red

Item No.: 2009-145/000-024

Mini-WSB Inline; for Smart Printer; 1700 pieces on roll; stretchable 5 - 5.2 mm; plain; snap-on type; violet

Mini-WSB marking card; as card; not

Mini-WSB marking card; as card; not

Item No.: 2009-145

Mini-WSB Inline; for Smart Printer; 1700 pieces on roll; stretchable 5 - 5.2 mm; plain; snap-on type; white



Mini-WSB marking card; as card; not

Item No.: 2009-145/000-002

Mini-WSB Inline; for Smart Printer; 1700 pieces on roll; stretchable 5 - 5.2 mm; plain; snap-on type; yellow



Mini-WSB marking card; as card; not stret-

chable; plain; snap-on type; light green

Item No.: 248-501/000-006

Mini-WSB marking card; as card; not stretchable; plain; snap-on type; blue

stretchable; plain; snap-on type; gray

Item No.: 248-501/000-007

Item No.: 248-501/000-023

stretchable; plain; snap-on type; green

Item No.: 248-501/000-017

Item No.: 248-501/000-012

Mini-WSB marking card; as card; not stretchable; plain; snap-on type; orange

Item No.: 248-501/000-005

Item No.: 248-501/000-024

Mini-WSB marking card; as card; not stretchable; plain; snap-on type; violet





Mini-WSB marking card; as card; not stret-

stretchable; plain; snap-on type; red

Item No.: 793-5501/000-006 WMB marking card; as card; for terminal block width 5 - 17.5 mm; stretchable 5 -5.2 mm; plain; snap-on type; blue



WMB marking card; as card; for terminal

Mini-WSB marking card; as card; not stretchable; plain; snap-on type; white



Item No.: 248-501/000-002

chable; plain; snap-on type; yellow



Item No.: 793-5501/000-014

block width 5 - 17.5 mm; stretchable 5 -5.2 mm; plain; snap-on type; brown



Item No.: 793-5501/000-007

WMB marking card; as card; for terminal block width 5 - 17.5 mm; stretchable 5 -5.2 mm; plain; snap-on type; gray



Item No.: 793-5501/000-023

WMB marking card; as card; for terminal block width 5 - 17.5 mm; stretchable 5 -5.2 mm; plain; snap-on type; green

Item No.: 793-5501/000-017

WMB marking card; as card; for terminal block width 5 - 17.5 mm; stretchable 5 -5.2 mm; plain; snap-on type; light green

Item No.: 793-5501/000-012

WMB marking card; as card; for terminal block width 5 - 17.5 mm; stretchable 5 -5.2 mm; plain; snap-on type; orange

Item No.: 793-5501/000-005

WMB marking card; as card; for terminal block width 5 - 17.5 mm; stretchable 5 -5.2 mm; plain; snap-on type; red

https://www.wago.com/2202-1311/1000-410



1.2.7.2 Marker



Item No.: 793-5501/000-024

WMB marking card; as card; for terminal block width 5 - 17.5 mm; stretchable 5 -5.2 mm; plain; snap-on type; violet



Item No.: 2009-115/000-007 WMB-Inline; for Smart Printer; 1500 pieces on roll; stretchable 5 - 5.2 mm; plain; snap-on type; gray



Item No.: 2009-115/000-005

WMB-Inline; for Smart Printer; 1500 pieces on roll; stretchable 5 - 5.2 mm; plain; snap-on type; red

Item No.: 2009-115/000-023

Item No.: 793-5501

WMB-Inline; for Smart Printer; 1500 pieces on roll; stretchable 5 - 5.2 mm; plain; snap-on type; green

WMB marking card; as card; for terminal

block width 5 - 17.5 mm; stretchable 5 -

A

5.2 mm; plain; snap-on type; white



Item No.: 2009-115/000-024

WMB-Inline; for Smart Printer; 1500 pieces on roll; stretchable 5 - 5.2 mm; plain; snap-on type; violet

Item No.: 2009-115/000-017

Item No.: 793-5501/000-002

WMB-Inline; for Smart Printer; 1500 pieces on roll; stretchable 5 - 5.2 mm; plain; snap-on type; light green

WMB marking card; as card; for terminal

block width 5 - 17.5 mm; stretchable 5 -

A

5.2 mm; plain; snap-on type; yellow



snap-on type; blue

Item No.: 2009-115/000-006

Item No.: 2009-115/000-012 WMB-Inline; for Smart Printer; 1500 pieces on roll; stretchable 5 - 5.2 mm; plain; snap-on type; orange

WMB-Inline; for Smart Printer; 1500 pie-

ces on roll; stretchable 5 - 5.2 mm; plain;

A



Item No.: 2009-115

WMB-Inline; for Smart Printer; 1500 pieces on roll; stretchable 5 - 5.2 mm; plain; snap-on type; white

Item No.: 2009-115/000-002

WMB-Inline; for Smart Printer; 1500 pieces on roll; stretchable 5 - 5.2 mm; plain; snap-on type; yellow

1.2.7.3 Marker carrier





Item No.: 2002-161 Adaptor; gray



Adaptor; gray

1.2.7.4 Marking strip



Item No.: 2009-110

Marking strips; for Smart Printer; on reel; not stretchable; plain; snap-on type; white

1.2.8 Protective warning marker

1.2.8.1 Cover



Item No.: 2002-115

Protective warning marker; for 5 terminal blocks; with high-voltage symbol, black; yellow

1.2.9 Push-in type wire jumper

1.2.9.1 Jumper



Item No.: 2009-414

Push-in type wire jumper; 1.5 mm²; insulated; 110 mm long; black



Item No.: 2009-412

Push-in type wire jumper; insulated; 60 mm long; black



Item No.: 2009-414/000-005

Push-in type wire jumper; 1.5 mm²; insulated; 110 mm long; black



Item No.: 2009-416

Push-in type wire jumper; 1.5 mm²; insulated; 250 mm long; black



Item No.: 2009-414/000-006

Push-in type wire jumper; insulated; 110 mm long; black

https://www.wago.com/2202-1311/1000-410



1.2.10 Screwless end stop

1.2.10.1 Mounting accessories



Item No.: 249-117

Screwless end stop; 10 mm wide; for DIN-rail 35 x 15 and 35 x 7.5; gray



Item No.: 249-116

Screwless end stop; 6 mm wide; for DINrail 35 x 15 and 35 x 7.5; gray

1.2.11 Test and measurement

1.2.11.1 Testing accessories



Modular TOPJOB®S connector; modular; for jumper contact slot; 10-pole; 2,50 mm²; gray

Item No.: 2002-511

Modular TOPJOB®S connector; modular; for jumper contact slot; 1-pole; 2,50 mm²; gray

Item No.: 2002-552

Modular TOPJOB®S connector; modular; for jumper contact slot; 2-pole; 2,50 mm²; grav

Item No.: 2002-553

Modular TOPJOB®S connector; modular; for jumper contact slot; 3-pole; 2,50 mm²; gray

Item No.: 2002-554

Modular TOPJOB®S connector; modular; for jumper contact slot; 4-pole; 2,50 mm²; gray

Item No.: 2002-555

Modular TOPJOB®S connector; modular; for jumper contact slot; 5-pole; 2,50 mm²; gray

Item No.: 2002-556

Modular TOPJOB®S connector; modular; for jumper contact slot; 6-pole; 2,50 mm²; gray

Item No.: 2002-557

Modular TOPJOB®S connector; modular; for jumper contact slot; 7-pole; 2,50 mm²; gray



Item No.: 2002-558

Modular TOPJOB®S connector; modular; for jumper contact slot; 8-pole; 2,50 mm²; gray

Item No.: 2002-559

Modular TOPJOB®S connector; modular; for jumper contact slot; 9-pole; 2,50 mm²; gray

Item No.: 2002-549

Spacer module; modular; e.g., for bridging commoned terminal blocks; gray

Item No.: 2009-174

Test plug adapter; for 4 mm Ø test plugs; for testing TOPJOB®S rail-mounted terminal blocks; gray



Item No.: 2009-182
Testing tap; for max. 2.5 mm²; tool-free connection for individual test wires 0.08 - 2.5 mm; gray

Item No.: 2002-649

TOPJOB®S L-type spacer module; modular; e.g., for bridging commoned terminal blocks; gray

Item No.: 2002-611

TOPJOB®S L-type test plug module; modular; 1-pole; 2,50 mm²; gray

1.2.12 Tool

1.2.12.1 Operating tool

Item No.: 210-658

Operating tool; Blade: 3.5×0.5 mm; with a partially insulated shaft; angled; short; multicoloured

Item No.: 210-720

Operating tool; Blade: 3.5 x 0.5 mm; with a partially insulated shaft; multicoloured

Installation Notes



Polarized diode gates with a common cathode can be created using the following terminal blocks:

2002-1311/1000-410 or 2002-1311/1000-411



Page 10/10 Version 25.11.2024