


## 34P-2005: Bend 90° Press swivel adapter with flat sealing 20x3/4"

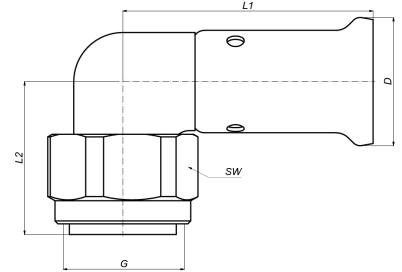

### Commercial information

The body of the fitting is made from CW617N brass. These fittings offer great advantages with regard to corrosion and they are also also better for the environment.

- The fitting has a buffer ring that prevents direct galvanic contact between the aluminium of the pipe and the brass of the fitting.
- This excludes the possibility of electrolysis occurring.
- The fitting is equipped with O-rings made from EPDM and RVS pressure sleeves with 3 inspection windows.
- In order to prevent assembly errors, the dimensions and type of press profile which can be pressed are shown on the RVS sleeves

#### Basic unit dimensions

Height	33 mm
Length	66 mm
Width	52 mm
Net weight	0.118 kg

#### Certificates

ATG, DVGW Wasser, ETA, KIWA, ÖVGW Wasser, WRAS, KOMO, STF, ÖN EN 21003-2/-3, GOST-R, ITC, TSU, QB (CSTBat), AFNOR, ACS, PZH, DNV-GL, Sans 21003, Kontrol Biro, EMI

#### Applications

Potable water, Heating, Compressed air, Cooling, Sanitary

#### Solutions

Building installations, Industry, Utility, Shipbuilding

## Technical characteristics

Material connection 1	Brass	Bend radius	20 Millimetre
Material quality connection 1	CuZn40Pb2 (CW617N)	Outer pipe diameter connection 1	20 Millimetre
Surface protection connection 1	Untreated	Length	66.3 Millimetre
Surface treatment connection 1	Untreated	Max. operating pressure at 20 °C	16 Bar
Material connection 2	Brass	Standard Dimension Ratio (SDR)	0
Material quality connection 2	CuZn40Pb2 (CW617N)		
Surface protection connection 2	Untreated		
Surface treatment connection 2	Untreated		
Shape	Bend		
Reducing	✘		
Eccentric	✘		
System specific	✔		
Connection 1	Press sleeve		
Contour code connection 1	TH		
Nominal diameter connection 2	3/4 inch (20)		
Connection 2	Union nut		
Main colour fitting	Brass		
Material sealing	Ethylene-propylene diene monomer rubber (EPDM)		
With buffer stud	✔		
Self-sealing	✘		
Ring stiffness class	Other		
Capped	✘		
FM quality mark	✘		
LPCB quality mark	✘		
ULC quality mark	✘		
UL quality mark	✘		
VdS quality mark	✘		
KIWA certified	✔		
Gastec QA mark	✘		