

Equinox EQUINOX 165 2500 940 DALI 2059949



PRODUCT OVERVIEW

Product name	EQUINOX 165 2500 940 DALI
Technology	LED
Cap/Base	N/A
Housing	Aluminium
Mount	Ceiling recessed mounting
Warranty	5 years
Fixture luminous flux (lm)	2500
Luminaire efficacy (lm/W)	125
Colour temperature (K)	4000
Light colour	Neutral White
CRI (Ra)	90
Colour Variation Initial (SDCM)	SDCM3
Colour Consistency (SDCM)	3
Glare control	< 19
Photobiological Risk Group	RG1
Total power consumption (W)	20
Electrical protection	Class II
Control gear type	LED driver constant current
Control gear mounting	Remote
Housing colour	RAL 9016 - Traffic white / Bezel
IP rating	IP20
IK rating	IK02
Product EAN number	5025768599493

DATA TABLE

General data

Product name	EQUINOX 165 2500 940 DALI
Technology	LED
Cap/Base	N/A

Equinox

EQUINOX 165 2500 940 DALI
2059949

Housing	Aluminium
Mount	Ceiling recessed mounting
Operating temperature range (°C)	1°C...+25°C
Performance ambient temperature Tq (°C)	25
Warranty	5 years

Optical data

Fixture luminous flux (lm)	2500
Luminaire efficacy (lm/W)	125
Colour temperature (K)	4000
Light colour	Neutral White
CRI (Ra)	90
Colour Variation Initial (SDCM)	SDCM3
Colour Consistency (SDCM)	3
Glare control	< 19
Photobiological Risk Group	RG1

Electrical data

Total power consumption (W)	20
Primary Supply/Product voltage - min (V)	220
Lamp power factor	0.96
Electrical protection	Class II
Control gear type	LED driver constant current
Control gear mounting	Remote
Drive current (mA)	650
Inrush Current (A)	20
Inrush Duration (µs)	140
Glow Wire Test (°C)	650
Energy Efficiency Class (A->G) of contained light source	D
Nominal Frequency (Hz)	50/60Hz
Max. products per 10A C Breaker	40
Max. products per 20A B Breaker	44
Connectable conductor cross section - Min (mm²)	0.5
Connectable conductor cross section - Max (mm²)	2.5

Lifetime data

Lifespan L70 B50	120000
Lifespan L80 B20	114000
Lifespan L80 B10	108000
Lifespan L90 B10	51500

Physical data

Housing colour	RAL 9016 - Traffic white / Bezel
IP rating	IP20
IK rating	IK02
Diffuser finish	Other

Equinox EQUINOX 165 2500 940 DALI 2059949

Diffuser material	PMMA Acrylic
Nominal Product Diameter (mm)	175
Weight (kg)	1.55


Packaging

Single packaging type	Carton
Product EAN number	5025768599493
Packaging single width (cm)	25.0
Packaging single depth (cm)	20.0
DUN14 (outer)	05025768599493
Packaging outer length / height (cm)	20.0

Safety data

Optimal operating condition (°C)	1-25
----------------------------------	------

PHOTOMETRY

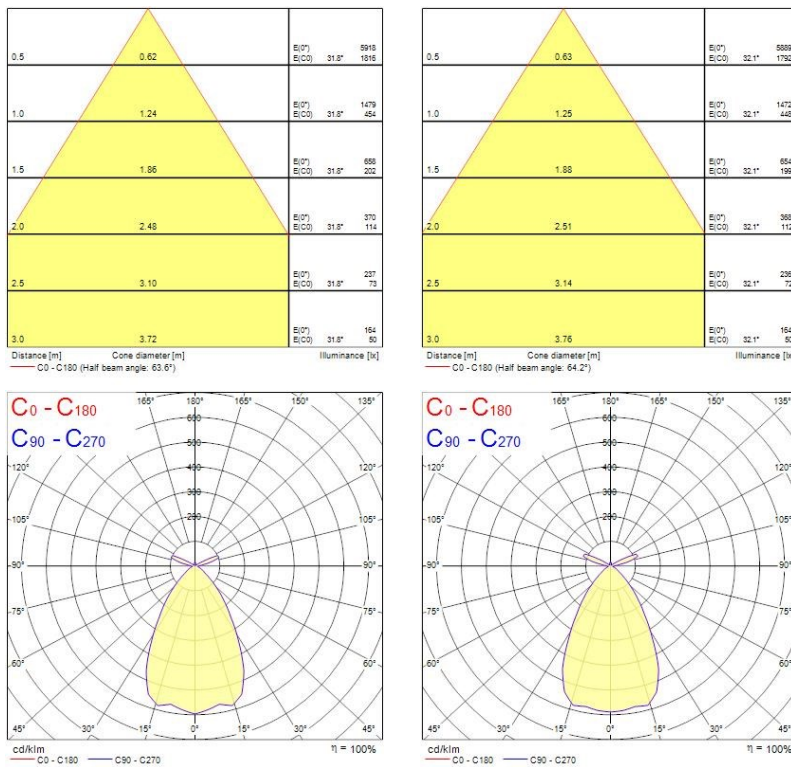


Equinox EQUINOX 165 2500 940 DALI 2059949

0.5	0.64	E(0°) E(C0)	32.8°	1074 322
1.0	1.28	E(0°) E(C0)	32.8°	269 81
1.5	1.92	E(0°) E(C0)	32.8°	119 36
2.0	2.56	E(0°) E(C0)	32.8°	67 20
2.5	3.20	E(0°) E(C0)	32.8°	43 13
3.0	3.84	E(0°) E(C0)	32.8°	30 9

Distance [m] Cone diameter [m] Illuminance [lx]

— C0 - C180 (Half beam angle: 65.2°)

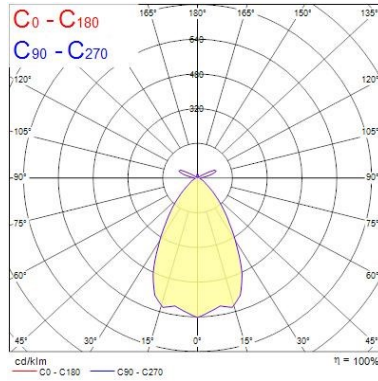

TECHNICAL DRAWINGS

