


**Data Sheet | Item Number: 2721-205/037-000**


1-conductor female connector; push-button; Push-in CAGE CLAMP®; 2.5 mm²; Pin spacing 7.5 mm; 5-pole; 100% protected against mismatching; Lateral locking levers; 2,50 mm²; light gray

<https://www.wago.com/2721-205/037-000>

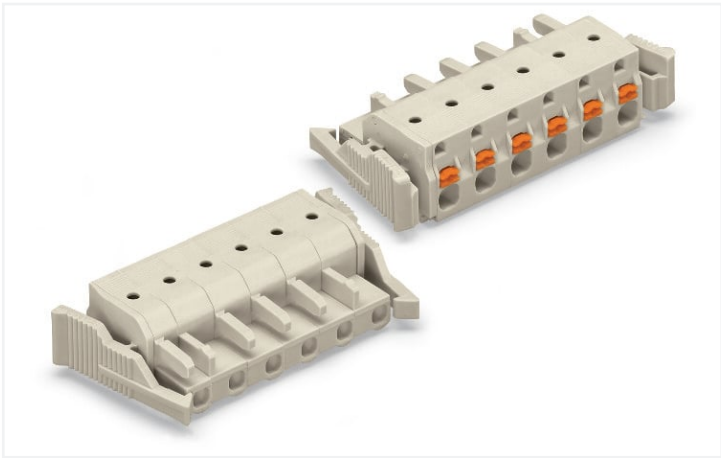

Color: ■ light gray


Similar to illustration

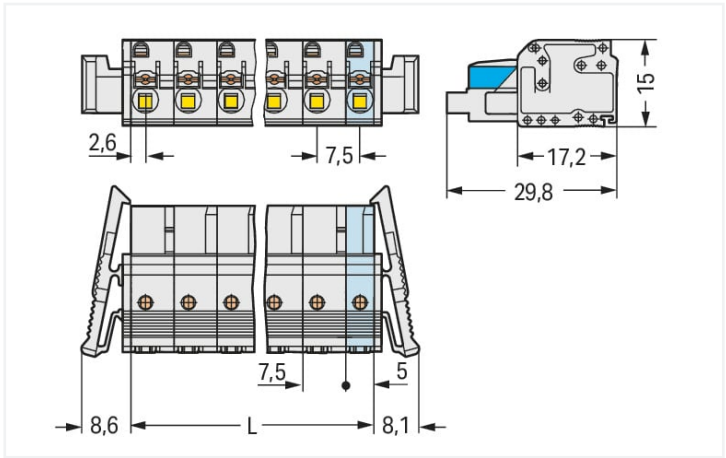

Dimensions in mm

$L = (\text{pole no.} - 1) \times \text{pin spacing} + 5 \text{ mm}$

2-pole female connectors – one latch only

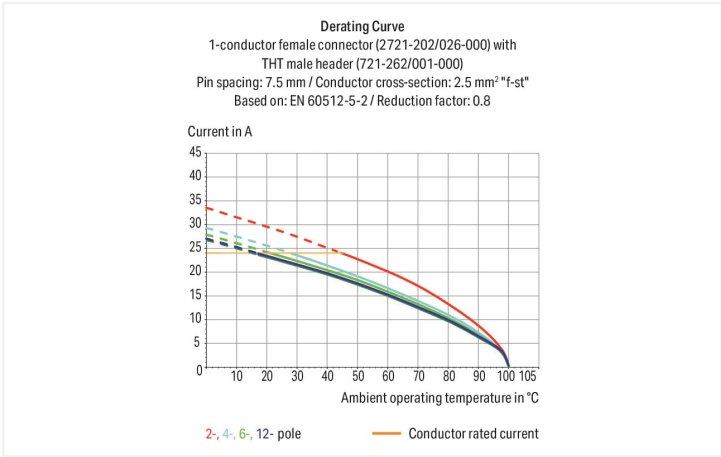

- Universal connection for all conductor types
- Easy-to-use design does not require specialty tools
- Ability to wire while mated
- Simple, push-in termination of solid and ferruled conductors
- Integrated test ports for testing parallel to the conductor entry
- 100% protected against mismatching
- Coding option available

**Notes**

Safety information

The MCS – MULTI CONNECTION SYSTEM includes connectors without breaking capacity in accordance with DIN EN 61984. When used as intended, these connectors must not be connected/disconnected when live or under load. When used as intended, these connectors must not be connected/disconnected when live or under load. The circuit design should ensure header pins, which can be touched, are not live when unmated.

Variants:

Other pole numbers  
Gold-plated or partially gold-plated contact surfaces  
Other versions (or variants) can be requested from WAGO Sales or configured at <https://configurator.wago.com/>.



Electrical data

| Ratings per          | IEC/EN 60664-1 |       |        |
|----------------------|----------------|-------|--------|
| Overvoltage category | III            | III   | II     |
| Pollution degree     | 3              | 2     | 2      |
| Nominal voltage      | 500 V          | 630 V | 1000 V |
| Rated surge voltage  | 6 kV           | 6 kV  | 6 kV   |
| Rated current        | 16 A           | 16 A  | 16 A   |

| Approvals per | UL 1059 |       |       |
|---------------|---------|-------|-------|
| Use group     | B       | C     | D     |
| Rated voltage | 300 V   | 150 V | 300 V |
| Rated current | 15 A    | 15 A  | 10 A  |

| Approvals per | UL 1977 |
|---------------|---------|
| Rated voltage | 600 V   |
| Rated current | 15 A    |

| Approvals per | CSA   |       |       |
|---------------|-------|-------|-------|
| Use group     | B     | C     | D     |
| Rated voltage | 300 V | 300 V | 300 V |
| Rated current | 15 A  | 15 A  | 10 A  |

Connection data

|                            |   |
|----------------------------|---|
| Connection points          | 5 |
| Total number of potentials | 5 |
| Number of connection types | 1 |
| Number of levels           | 1 |

| Connection 1                                      |                                       |
|---------------------------------------------------|---------------------------------------|
| Connection technology                             | Push-in CAGE CLAMP®                   |
| Actuation type                                    | Push-button                           |
| Actuation direction 1                             | Operation parallel to conductor entry |
| Solid conductor                                   | 0.2 ... 2.5 mm² / 24 ... 12 AWG       |
| Fine-stranded conductor                           | 0.2 ... 2.5 mm² / 24 ... 12 AWG       |
| Fine-stranded conductor; with insulated ferrule   | 0.25 ... 1.5 mm²                      |
| Fine-stranded conductor; with uninsulated ferrule | 0.25 ... 2.5 mm²                      |
| Strip length                                      | 10 ... 11 mm / 0.39 ... 0.43 inches   |
| Pole number                                       | 5                                     |
| Conductor entry direction to mating direction     | 0°                                    |

Physical data

|             |                        |
|-------------|------------------------|
| Pin spacing | 7.5 mm / 0.295 inches  |
| Width       | 51.7 mm / 2.035 inches |
| Height      | 15 mm / 0.591 inches   |
| Depth       | 29.8 mm / 1.173 inches |

Mechanical data

|                          |     |
|--------------------------|-----|
| Variable coding          | Yes |
| Anti-rotation protection | Yes |

Plug-in connection

|                                    |                         |
|------------------------------------|-------------------------|
| Contact type (pluggable connector) | Female connector/socket |
| Connector (connection type)        | for conductor           |
| Mismating protection               | Yes                     |
| Locking of plug-in connection      | Locking lever           |



| Material data               |                                                                                                                        |
|-----------------------------|------------------------------------------------------------------------------------------------------------------------|
| Note (material data)        | <a href="https://www.wago.com/us/material-specifications">Information on material specifications can be found here</a> |
| Color                       | light gray                                                                                                             |
| Material group              | I                                                                                                                      |
| Insulation material         | Polyamide (PA66)                                                                                                       |
| Flammability class per UL94 | V0                                                                                                                     |
| Clamping spring material    | Chrome-nickel spring steel (CrNi)                                                                                      |
| Contact material            | Copper alloy                                                                                                           |
| Contact plating             | Tin                                                                                                                    |
| Fire load                   | 0.26 MJ                                                                                                                |
| Weight                      | 11.2 g                                                                                                                 |

| Environmental requirements |                 |
|----------------------------|-----------------|
| Limit temperature range    | -60 ... +100 °C |
| Processing temperature     | -35 ... +60 °C  |

| Commercial data       |                        |
|-----------------------|------------------------|
| Product Group         | 3 (Multi Conn. System) |
| eCl@ss 10.0           | 27-44-03-09            |
| eCl@ss 9.0            | 27-44-03-09            |
| ETIM 8.0              | EC002638               |
| ETIM 7.0              | EC002638               |
| PU (SPU)              | 50 pcs                 |
| Packaging type        | Box                    |
| Country of origin     | PL                     |
| GTIN                  | 4045454908249          |
| Customs tariff number | 85366990990            |

| Environmental Product Compliance |                        |
|----------------------------------|------------------------|
| RoHS Compliance Status           | Compliant,No Exemption |

Approvals / Certificates

General approvals



| Approval                              | Standard  | Certificate Name |
|---------------------------------------|-----------|------------------|
| CB<br>DEKRA Certification B.V.        | IEC 61984 | NL-39756/A1      |
| KEMA/KEUR<br>DEKRA Certification B.V. | EN 61984  | 71-121453        |
| UR<br>Underwriters Laboratories Inc.  | UL 1059   | E45172           |
| UR<br>Underwriters Laboratories Inc.  | UL 1977   | E 45171          |



Downloads

Environmental Product Compliance

Compliance Search

Environmental Product Compliance  
2721-205/037-000

↓

Documentation

Additional Information

Technical Section03.04.2019pdf2010.85 KB

↓

1 Compatible Products

1.1 System counterpart

1.1.1 Male connector/plug



**Item No.: 723-605**  
1-conductor male connector; CAGE CLAMP®; 2.5 mm²; Pin spacing 7.5 mm; 5-pole; 100% protected against mismatching; 2,50 mm²; light gray



**Item No.: 721-835/001-000**  
THT male header; 1.0 x 1.0 mm solder pin; angled; 100% protected against mismatching; Pin spacing 7.5 mm; 5-pole; light gray



**Item No.: 721-235/001-000**  
THT male header; 1.0 x 1.0 mm solder pin; straight; 100% protected against mismatching; Pin spacing 7.5 mm; 5-pole; light gray

1.2 Optional Accessories

1.2.1 Ferrule

1.2.1.1 Ferrule



**Item No.: 216-301**  
Ferrule; Sleeve for 0.25 mm² / AWG 24; insulated; electro-tin plated; yellow



**Item No.: 216-321**  
Ferrule; Sleeve for 0.25 mm² / AWG 24; insulated; electro-tin plated; yellow



**Item No.: 216-151**  
Ferrule; Sleeve for 0.25 mm² / AWG 24; uninsulated; electro-tin plated



**Item No.: 216-131**  
Ferrule; Sleeve for 0.25 mm² / AWG 24; uninsulated; electro-tin plated; silver-colored



**Item No.: 216-302**  
Ferrule; Sleeve for 0.34 mm² / 22 AWG; insulated; electro-tin plated; light turquoise



**Item No.: 216-322**  
Ferrule; Sleeve for 0.34 mm² / 22 AWG; insulated; electro-tin plated; light turquoise



**Item No.: 216-132**  
Ferrule; Sleeve for 0.34 mm² / AWG 24; uninsulated; electro-tin plated



**Item No.: 216-152**  
Ferrule; Sleeve for 0.34 mm² / AWG 24; uninsulated; electro-tin plated



**Item No.: 216-241**  
Ferrule; Sleeve for 0.5 mm² / 20 AWG; insulated; electro-tin plated; electrolytic copper; gastight crimped; acc. to DIN 46228, Part 4/09.90; white



**Item No.: 216-201**  
Ferrule; Sleeve for 0.5 mm² / 20 AWG; insulated; electro-tin plated; white



**Item No.: 216-221**  
Ferrule; Sleeve for 0.5 mm² / 20 AWG; insulated; electro-tin plated; white



**Item No.: 216-141**  
Ferrule; Sleeve for 0.5 mm² / 20 AWG; uninsulated; electro-tin plated; electrolytic copper; gastight crimped; acc. to DIN 46228, Part 1/08.92



**Item No.: 216-101**  
Ferrule; Sleeve for 0.5 mm² / AWG 22; uninsulated; electro-tin plated; silver-colored



**Item No.: 216-121**  
Ferrule; Sleeve for 0.5 mm² / AWG 22; uninsulated; electro-tin plated; silver-colored



**Item No.: 216-242**  
Ferrule; Sleeve for 0.75 mm² / 18 AWG; insulated; electro-tin plated; electrolytic copper; gastight crimped; acc. to DIN 46228, Part 4/09.90; gray



**Item No.: 216-262**  
Ferrule; Sleeve for 0.75 mm² / 18 AWG; insulated; electro-tin plated; electrolytic copper; gastight crimped; acc. to DIN 46228, Part 4/09.90; gray



1.2.1.1 Ferrule

|                                                                                                                                                                                                                                                                      |                                                                                                                                                                                                                                                                 |                                                                                                                                                                                                                                                                                 |                                                                                                                                                                                                                                                                       |
|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <br><b>Item No.: 216-202</b><br>Ferrule; Sleeve for 0.75 mm² / 18 AWG; insulated; electro-tin plated; gray                                                                          | <br><b>Item No.: 216-222</b><br>Ferrule; Sleeve for 0.75 mm² / 18 AWG; insulated; electro-tin plated; gray                                                                     | <br><b>Item No.: 216-142</b><br>Ferrule; Sleeve for 0.75 mm² / 18 AWG; uninsulated; electro-tin plated; electrolytic copper; gastight crimped; acc. to DIN 46228, Part 1/08.92                 | <br><b>Item No.: 216-102</b><br>Ferrule; Sleeve for 0.75 mm² / AWG 20; uninsulated; electro-tin plated; silver-colored                                                             |
| <br><b>Item No.: 216-122</b><br>Ferrule; Sleeve for 0.75 mm² / AWG 20; uninsulated; electro-tin plated; silver-colored                                                              | <br><b>Item No.: 216-243</b><br>Ferrule; Sleeve for 1 mm² / AWG 18; insulated; electro-tin plated; electrolytic copper; gastight crimped; acc. to DIN 46228, Part 4/09.90; red | <br><b>Item No.: 216-263</b><br>Ferrule; Sleeve for 1 mm² / AWG 18; insulated; electro-tin plated; electrolytic copper; gastight crimped; acc. to DIN 46228, Part 4/09.90; red                 | <br><b>Item No.: 216-203</b><br>Ferrule; Sleeve for 1 mm² / AWG 18; insulated; electro-tin plated; red                                                                             |
| <br><b>Item No.: 216-223</b><br>Ferrule; Sleeve for 1 mm² / AWG 18; insulated; electro-tin plated; red                                                                              | <br><b>Item No.: 216-103</b><br>Ferrule; Sleeve for 1 mm² / AWG 18; uninsulated; electro-tin plated                                                                            | <br><b>Item No.: 216-143</b><br>Ferrule; Sleeve for 1 mm² / AWG 18; uninsulated; electro-tin plated; electrolytic copper; gastight crimped; acc. to DIN 46228, Part 1/08.92                    | <br><b>Item No.: 216-123</b><br>Ferrule; Sleeve for 1 mm² / AWG 18; uninsulated; electro-tin plated; silver-colored                                                                |
| <br><b>Item No.: 216-204</b><br>Ferrule; Sleeve for 1.5 mm² / AWG 16; insulated; electro-tin plated; black                                                                          | <br><b>Item No.: 216-224</b><br>Ferrule; Sleeve for 1.5 mm² / AWG 16; insulated; electro-tin plated; black                                                                     | <br><b>Item No.: 216-244</b><br>Ferrule; Sleeve for 1.5 mm² / AWG 16; insulated; electro-tin plated; electrolytic copper; gastight crimped; acc. to DIN 46228, Part 4/09.90; black             | <br><b>Item No.: 216-264</b><br>Ferrule; Sleeve for 1.5 mm² / AWG 16; insulated; electro-tin plated; electrolytic copper; gastight crimped; acc. to DIN 46228, Part 4/09.90; black |
| <br><b>Item No.: 216-284</b><br>Ferrule; Sleeve for 1.5 mm² / AWG 16; insulated; electro-tin plated; electrolytic copper; gastight crimped; acc. to DIN 46228, Part 4/09.90; black | <br><b>Item No.: 216-124</b><br>Ferrule; Sleeve for 1.5 mm² / AWG 16; uninsulated; electro-tin plated                                                                         | <br><b>Item No.: 216-144</b><br>Ferrule; Sleeve for 1.5 mm² / AWG 16; uninsulated; electro-tin plated; electrolytic copper; gastight crimped; acc. to DIN 46228, Part 1/08.92; silver-colored | <br><b>Item No.: 216-104</b><br>Ferrule; Sleeve for 1.5 mm² / AWG 16; uninsulated; electro-tin plated; silver-colored                                                             |
| <br><b>Item No.: 216-106</b><br>Ferrule; Sleeve for 2.5 mm² / AWG 14; uninsulated; electro-tin plated; silver-colored                                                             |                                                                                                                                                                                                                                                                 |                                                                                                                                                                                                                                                                                 |                                                                                                                                                                                                                                                                       |

1.2.2 Insulation stop

1.2.2.1 Insulation stop

|                                                                                                                                                                |                                                                                                                                                             |
|----------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <br><b>Item No.: 231-671</b><br>Insulation stop; 0.25 - 0.5 mm²; light gray | <br><b>Item No.: 231-672</b><br>Insulation stop; 0.75 - 1 mm²; dark gray |
|----------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------|

1.2.3 Marking

1.2.3.1 Marking strip

|                                                                                                                                                                                                                                                                               |
|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <br><b>Item No.: 210-332/750-020</b><br>Marking strips; as a DIN A4 sheet; MARKED; 1-20 (80x); Height of marker strip: 3 mm; Strip length 182 mm; Horizontal marking; Self-adhesive; white |
|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|

1.2.4 Strain relief

1.2.4.1 Strain relief plate



**Item No.: 734-129**  
Strain relief plate; for female and male connectors; 25 mm wide; 1 part; Pin spacing 3.5 mm; light gray

1.2.5 Test and measurement

1.2.5.1 Testing accessories



**Item No.: 210-136**  
Test plug; 2 mm Ø; with 500 mm cable; red



**Item No.: 231-662**  
Test plugs for female connectors; for 7.5 mm and 7.62 mm pin spacing; 2,50 mm²; light gray

1.2.6 Tool

1.2.6.1 Operating tool




**Item No.: 210-720**  
Operating tool; Blade: 3.5 x 0.5 mm; with a partially insulated shaft; multicoloured




**Item No.: 210-657**  
Operating tool; Blade: 3.5 x 0.5 mm; with a partially insulated shaft; short; multicoloured

Installation Notes

Conductor termination




Inserting/removing a conductor via 3.5 mm screwdriver – Push-in CAGE CLAMP® actuation in mated condition.



Push-in termination of solid conductors or fine-stranded conductors with ferrule

Testing



Testing parallel to conductor entry via integrated test ports – female connector with push-buttons and Push-in CAGE CLAMP® connection – touch contact perpendicular to conductor entry.

## Marking



Labeling via direct marking or self-adhesive strips.

## Coding



Coding a female connector by removing coding finger(s).

## Installation



Male connector with strain relief plate



Strain relief housing shown with a male connector equipped with CAGE CLAMP®