



Features

• AREUM SUSPENDED 1500 D/I 4000K SSC ALU is a highly efficient suspended LED luminaire with 70% direct and 30% indirect light distribution. Ultra thin (17mm) aluminium body with rounded edges. Length 1500mm, width 300mm. White aluminium RAL9006 powder coated luminaire body, powder coated steel surface gearbox and Y-shape power feeded suspension cables. SylSmart Standalone capable. Luminous flux: 7000lm, Power consumption: 57W. Luminaire efficacy: 123lm/W. CRI (Ra)>80 4000K (Neutral White) LED, chromaticity tolerance: SDCM<3. Lifespan: L80B10 57,000h. UGR<19, Luminance at 65°<3000 cd/m2. Photobiological safety risk group 0. Electrical protection: Class I. Glow Wire Test 650°C.


Product Overview

| | |
|-----------------------------------|--|
| Product name | AREUM SUSPENDED 1500 D/I 4000K SSC ALU |
| Technology | LED (3 SDCM) |
| Cap/Base | N/A |
| Housing | Aluminium, Steel |
| Mount | Suspended |
| General application | Office |
| ETIM Class | EC001743 |
| Fixture luminous flux (lm) | 7000 |
| Luminaire efficacy (lm/W) | 125 |
| Correlated colour temperature (k) | 4000 |
| Light colour | Neutral White |
| CRI (Ra) | 80 |
| Colour Variation Initial (SDCM) | 3 |
| Beam Angle (°) | 84 |
| Glare control | < 19 |

AREUM SUSPENDED 1500 D/I 4000K SSC ALU
0042976

| | |
|-----------------------------|-----------------------------|
| Photobiological Risk Group | RG0 |
| Total power consumption (W) | 56 |
| Electrical protection | Class I |
| Control gear type | LED driver constant current |
| Dimmable | Yes |
| Housing colour | RAL9006 |
| IP rating | IP20 |
| IK rating | IK03 |
| Product EAN number | 5410288429762 |
| Warranty | 5 years |
| Dimming method | SylSmart SSC |

Photometry

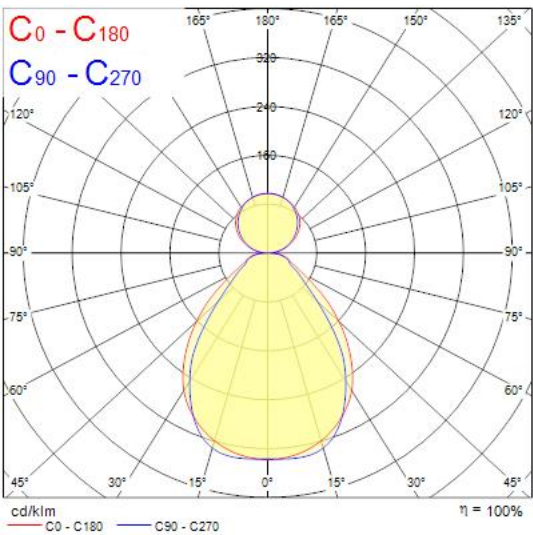

Technical drawings

