

## ToLEDo Retro GLS

ToLEDo RT GLS CL 806LM 827 E27 SL4

0029549



### Product features

- Perfect for decorative and general lighting applications and creates a warm ambiance similar to traditional lamps
- Same look, size and functionality as incandescent lamps
- Omni-directional light distribution
- Suitable replacement for incandescent and halogen lamps
- Gives same sparkling light effect as incandescent lamp
- Dimensionally identical to incandescent lamps - fits all fixtures
- Environment friendly - no mercury and lower CO2 emissions



## PRODUCT OVERVIEW

Product name	ToLEDo RT GLS CL 806LM 827 E27 SL4
Technology	LED
Watt (Rated) (W)	7
Type	LED exchangeable
Cap/Base	E27
Fixture rating	Open
General application	Residential & Consumer
ETIM Class	EC001959
Warranty	2 years
Luminous flux (lm)	806
Colour temperature (K)	2700
Light colour	Homelight
CRI (Ra)	80
Colour Variation Initial (SDCM)	SDCM6
Photobiological Risk Group	RG1
Wattage (W)	7
Dimmable	No
Average life (Nominal) (h)	15000
Product EAN number	5410288295497

## DATA TABLE

### General data

Product name	ToLEDo RT GLS CL 806LM 827 E27 SL4
Technology	LED
Watt (Rated) (W)	7

## ToLEDo Retro GLS

ToLEDo RT GLS CL 806LM 827 E27 SL4

0029549

Type	LED exchangeable
Cap/Base	E27
Fixture rating	Open
General application	Residential & Consumer
Operating temperature range (°C)	-20°C...+40°C
Performance ambient temperature Tq (°C)	25
ETIM Class	EC001959
Warranty	2 years

### Optical data

Luminous flux (lm)	806
Luminous flux (Rated) (lm)	806
Colour temperature (K)	2700
Light colour	Homelight
CRI (Ra)	80
Colour Variation Initial (SDCM)	SDCM6
Photobiological Risk Group	RG1
Lumen maintenance at end of nominal life (%)	70

### Electrical data

Wattage (W)	7
Equivalent watt (W)	60
Primary Supply/Product voltage - min (V)	220
Primary Supply/Product voltage - max (V)	240
Control gear required	No
No. Of switching cycles before premature failures	>50000
Dimmable	No
Inrush Current (A)	0.19
Inrush Duration (µs)	73
Lamp Energy Label (class)	E
Nominal Frequency (Hz)	50/60Hz
Max. products per 16A C Breaker	842
Max. products per 16A B Breaker	421

### Lifetime data

Lifespan L70 B50	12000
Average life (Nominal) (h)	15000
Average life (Rated) (h)	15000

### Physical data

Nominal Product Length (mm)	108
Nominal Product Diameter (mm)	60
Weight (kg)	0.256

### Packaging

Single packaging type	Carton
-----------------------	--------

## ToLEDo Retro GLS


ToLEDo RT GLS CL 806LM 827 E27 SL4  
0029549

Product EAN number	5410288295497
Packaging single length / height (cm)	12.0
Packaging single width (cm)	6.6
Packaging single depth (cm)	25.7
DUN14 (outer)	15410288295494
Units per outer package	6
Packaging outer length / height (cm)	13.0
Packaging outer width (cm)	40.7
Packaging outer depth (cm)	26.2


### Safety data

Optimal operating condition (°C)	-20-40
Breakage cleaning instructions	Not applicable
Special purpose lamp	No
Dry applications use only	Yes
Suitable for household illumination	Yes
Safety message	Not Suitable for totally enclosed fixtures

## PHOTOMETRY

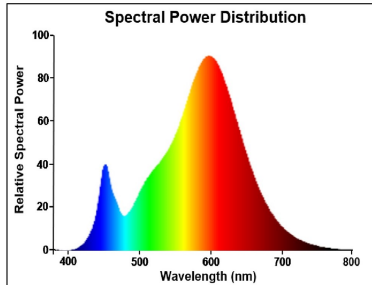

## TECHNICAL DRAWINGS



# SYLVANIA


## ToLEDo Retro GLS

ToLEDo RT GLS CL 806LM 827 E27 SL4  
0029549



### SYLVANIA

0029549

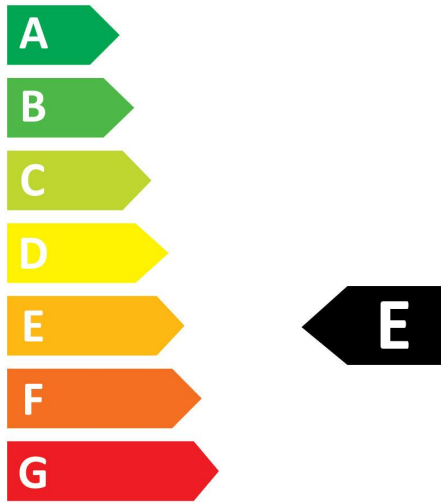

**7**  
kWh/1000h



2019/2015

# SYLVANIA


## ToLEDo Retro GLS

ToLEDo RT GLS CL 806LM 827 E27 SL4

0029549



0029549

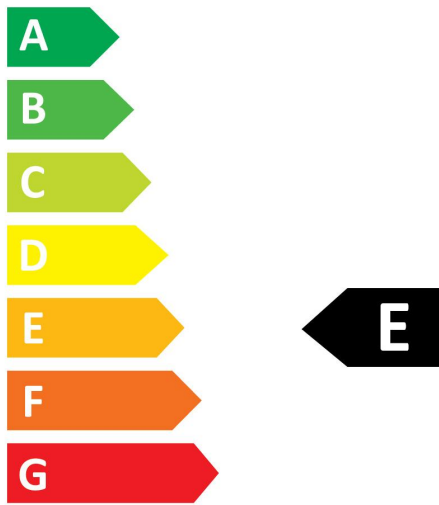

**7**  
kWh/1000h



2019/2015