
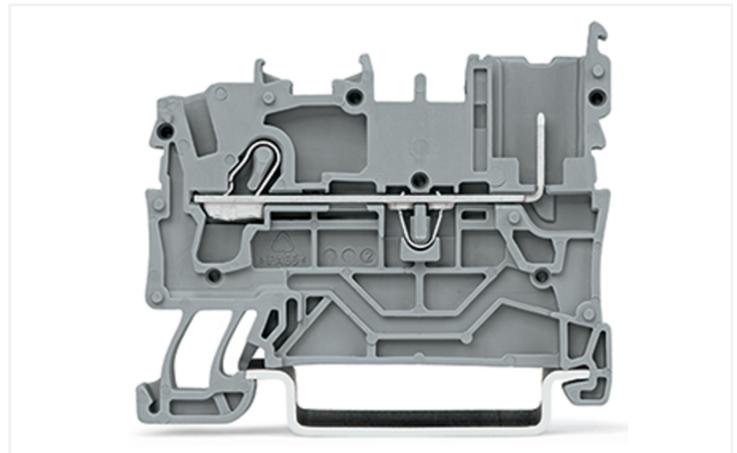



## Data Sheet | Item Number: 2022-1201/999-953

1-conductor/1-pin carrier terminal block; 2.5 mm<sup>2</sup>; suitable for Ex nA applications; for DIN-rail 35 x 15 and 35 x 7.5; Push-in CAGE CLAMP®; 2,50 mm<sup>2</sup>; gray

<https://www.wago.com/2022-1201/999-953>

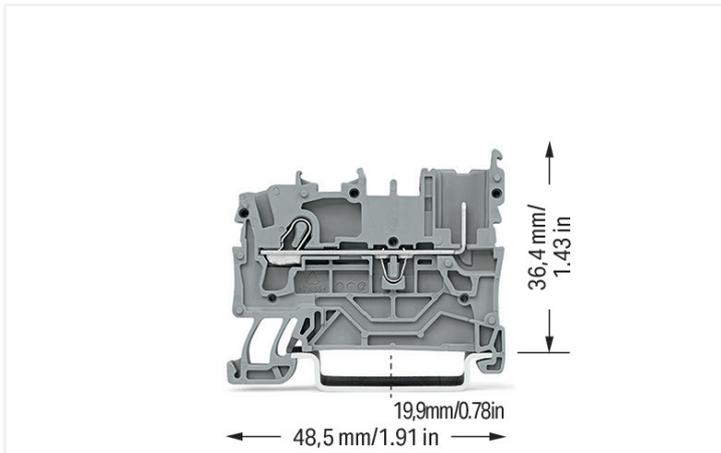

Color: ■ gray

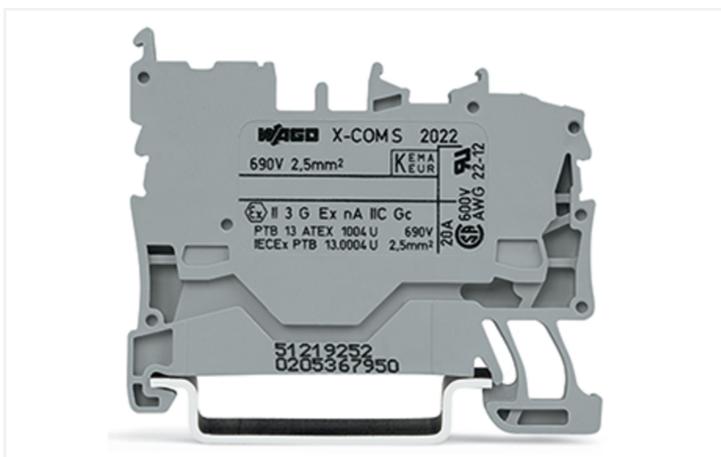

1-conductor/1-pin carrier terminal block, 2022 Series, gray

Our 1-conductor/1-pin carrier terminal block (item number 2022-1201/999-953) simplifies electrical installations. Ensure that the strip lengths are between 10 and 12 mm when connecting conductors to 1-conductor/1-pin carrier terminal block. Pluggable rail-mount terminal blocks are primarily found in switchgear units and control systems, most notably in railroad technology. These innovative systems combine the benefits of rail-mount terminal blocks and connectors for a flexible and reliable wiring system. You also have the option of pre-assembling installations, which not only makes production but also installation, operation, and maintenance more efficient and cost-effective. This product features conductor terminals and utilizes Push-in CAGE CLAMP®. Push-in CAGE CLAMP® technology provides a universal connection solution for any type of conductor. It allows both solid and fine-stranded conductors with ferrules to be inserted directly into the clamping point without the need for tools. 1-conductor/1-pin carrier terminal block is suitable for conductor cross sections ranging from 0.25 mm<sup>2</sup> to 4 mm<sup>2</sup>.

This pluggable rail-mount terminal block is operated with an operating tool. This product is designed for specific Ex applications (please refer to the product datasheet).

## Notes

## Safety Information

A separator plate (Item No. 209-191) or a 10 mm end stop (Item No. 249-117) must be placed at the end of a WAGO X-COM®S-SYSTEM terminal strip.

## Electrical data

| Ratings per                     | IEC/EN 60947-7-1 |     |    |
|---------------------------------|------------------|-----|----|
| Overvoltage category            | III              | III | II |
| Pollution degree                | 3                | 2   | 2  |
| Nominal voltage                 | -                | -   | -  |
| Rated impulse withstand voltage | -                | -   | -  |
| Rated current                   | -                | -   | -  |

| Approvals per | UL 1059 |       |   |
|---------------|---------|-------|---|
| Use group     | B       | C     | D |
| Rated voltage | 600 V   | 600 V | - |
| Rated current | 20 A    | 20 A  | - |

| Approvals per | CSA 22.2 No 158 |       |   |
|---------------|-----------------|-------|---|
| Use group     | B               | C     | D |
| Rated voltage | -               | 600 V | - |
| Rated current | -               | 20 A  | - |

| Ex information             |       |
|----------------------------|-------|
| Rated voltage EN (Ex e II) | 630 V |

| Power Loss   |                  |
|--|------------------|
| Power loss, per pole (potential)                             | 0.532 W          |
| Rated current $I_N$ for power loss specification             | 20 A             |
| Resistance value for specified, current-dependent power loss | 0.00133 $\Omega$ |

| General information |                    |
|---------------------|--------------------|
| Wiring direction    | Front-entry wiring |

## Connection Data

|                            |   |
|----------------------------|---|
| Clamping units             | 1 |
| Female plug slots          | 1 |
| Total number of potentials | 1 |
| Number of levels           | 1 |

| Connection 1   |   |
|--|---|
| Connection technology                                      | Push-in CAGE CLAMP®   |
| Actuation type   | Operating tool  |
| Connectable conductor materials                            | Copper  |
| Nominal cross-section                                      | 2.5 mm <sup>2</sup>   |
| Solid conductor  | 0.25 ... 4 mm <sup>2</sup> / 22 ... 12 AWG  |
| Solid conductor; push-in termination                       | 0.75 ... 4 mm <sup>2</sup> / 18 ... 12 AWG  |
| Fine-stranded conductor                                    | 0.25 ... 4 mm <sup>2</sup> / 22 ... 12 AWG  |
| Fine-stranded conductor; with insulated ferrule            | 0.25 ... 2.5 mm <sup>2</sup> / 22 ... 14 AWG  |
| Fine-stranded conductor; with ferrule; push-in termination | 1 ... 2.5 mm <sup>2</sup> / 18 ... 14 AWG   |
| Note (conductor cross-section)                             | Depending on the conductor characteristic, a conductor with a smaller cross-section can also be inserted via push-in termination. |
| Strip length   | 10 ... 12 mm / 0.39 ... 0.47 inches   |
| Wiring direction   | Front-entry wiring  |

### Physical data

|                                   |                        |
|-----------------------------------|------------------------|
| Width                             | 5.2 mm / 0.205 inches  |
| Height                            | 48.5 mm / 1.909 inches |
| Depth from upper-edge of DIN-rail | 36.4 mm / 1.433 inches |

### Mechanical data

|               |                     |
|---------------|---------------------|
| Mounting type | DIN-35 rail         |
| Marking level | Center/side marking |

### Material data

|                                    |  |
|------------------------------------|--|
| Note (material data)               | <a href="#">Information on material specifications can be found here</a> |
| Color                              | gray   |
| Material group                     | I  |
| Insulation material (main housing) | Polyamide (PA66)   |
| Flammability class per UL94        | V0   |
| Fire load                          | 0.112 MJ   |
| Weight                             | 5 g  |

### Environmental requirements

|                                  |                 |
|----------------------------------|-----------------|
| Processing temperature           | -35 ... +85 °C  |
| Continuous operating temperature | -60 ... +105 °C |

### Commercial data

|                       |               |
|-----------------------|---------------|
| PU (SPU)              | 100 pcs       |
| Packaging type        | Box           |
| Country of origin     | CN            |
| GTIN                  | 4050821644712 |
| Customs tariff number | 85366990990   |

### Product Classification

|             |                      |
|-------------|----------------------|
| UNSPSC      | 39121410             |
| eCl@ss 10.0 | 27-14-11-20          |
| eCl@ss 9.0  | 27-14-11-20          |
| ETIM 9.0    | EC000897             |
| ETIM 10.0   | EC000897             |
| ECCN        | NO US CLASSIFICATION |

### Environmental Product Compliance

|                        |                         |
|------------------------|-------------------------|
| RoHS Compliance Status | Compliant, No Exemption |
|------------------------|-------------------------|

Approvals / Certificates

General approvals



| Approval                              | Standard      | Certificate Name |
|---------------------------------------|---------------|------------------|
| CCA<br>DEKRA Certification B.V.       | EN 60947      | NTR CCA NL-7864  |
| CSA<br>CSA Group                      | C22.2 No. 158 | 2437422          |
| DEKRA<br>DEKRA Certification B.V.     | EN 60947      | 71-145809        |
| KEMA/KEUR<br>DEKRA Certification B.V. | EN 60947      | 71-116567        |
| UL<br>Underwriters Laboratories Inc.  | UL 1059       | E45172           |

Declarations of conformity and manufacturer's declarations

| Approval   | Standard | Certificate Name |
|--|----------|------------------|
| EU-Declaration of Conformity<br>WAGO GmbH & Co. KG | -        | -                |
| UK-Declaration of Conformity<br>WAGO GmbH & Co. KG | -        | -                |

Approvals for hazardous areas



| Approval                                       | Standard       | Certificate Name                          |
|--|----------------|---|
| ATEX<br>Physikalisch Technische Bundesanstalt  | EN IEC 60079-0 | PTB 13 ATEX 1004 U (II 3 G Ex ec II C Gc) |
| CCC<br>CNEX                                    | GB/T 3836.3    | 2020312313000255 (Ex ec IIC Gc)           |
| IECEx<br>Physikalisch Technische Bundesanstalt | IEC 60079-0    | IECEx PTB 13.0004U (Ex ec IIC Gc)         |

Downloads

Environmental Product Compliance

Compliance Search

|   |   |
|---|---|
| Environmental Product Compliance<br>2022-1201/999-953 | ↓ |
|---|---|

Documentation

Bid Text

|                   |            |                  |   |
|-------------------|------------|------------------|---|
| 2022-1201/999-953 | 19.02.2019 | xml<br>4.00 KB   | ↓ |
| 2022-1201/999-953 | 14.05.2019 | docx<br>15.33 KB | ↓ |

**CAD/CAE-Data**

| CAD data  | CAE data   |
|---|--|
| 2D/3D Models<br>2022-1201/999-953  | EPLAN Data Portal<br>2022-1201/999-953  |
|   | WSCAD Universe<br>2022-1201/999-953     |
|   | ZUKEN Portal<br>2022-1201/999-953       |

**1 Compatible Products**

**1.1 System counterpart**

**1.1.1 Female connector/socket**



**Item No.: 2022-102/999-953**  
 1-conductor female connector; Push-in CAGE CLAMP®; 4 mm²; Pin spacing 5.2 mm; 2-pole; Centered locking levers; 4,00 mm²; gray

**1.2 Required Accessories**

**1.2.1 End plate**

**1.2.1.1 End plate**



**Item No.: 2022-1291**  
 End and intermediate plate; 1 mm thick; gray



**Item No.: 2022-1292**  
 End and intermediate plate; 1 mm thick; orange

**1.3 Optional Accessories**

**1.3.1 Coding**

**1.3.1.1 Coding**



**Item No.: 2022-100**  
 Carrier with 6 coding pins; for coding of female plugs; orange

### 1.3.2 DIN-rail

#### 1.3.2.1 Mounting accessories



**Item No.: 210-196**

Aluminum carrier rail; 35 x 8.2 mm; 1.6 mm thick; 2 m long; unslotted; similar to EN 60715; silver-colored



**Item No.: 210-198**

Copper carrier rail; 35 x 15 mm; 2.3 mm thick; 2 m long; unslotted; according to EN 60715; copper-colored



**Item No.: 210-197**

Steel carrier rail; 35 x 15 mm; 1.5 mm thick; 2 m long; slotted; similar to EN 60715; silver-colored



**Item No.: 210-114**

Steel carrier rail; 35 x 15 mm; 1.5 mm thick; 2 m long; unslotted; similar to EN 60715; silver-colored



**Item No.: 210-118**

Steel carrier rail; 35 x 15 mm; 2.3 mm thick; 2 m long; unslotted; according to EN 60715; silver-colored



**Item No.: 210-115**

Steel carrier rail; 35 x 7.5 mm; 1 mm thick; 2 m long; slotted; according to EN 60715; "Hole width 18 mm; silver-colored



**Item No.: 210-112**

Steel carrier rail; 35 x 7.5 mm; 1 mm thick; 2 m long; slotted; according to EN 60715; "Hole width 25 mm; silver-colored



**Item No.: 210-113**

Steel carrier rail; 35 x 7.5 mm; 1 mm thick; 2 m long; unslotted; according to EN 60715; silver-colored

### 1.3.3 Ferrule

#### 1.3.3.1 Ferrule



**Item No.: 216-241**

Ferrule; Sleeve for 0.5 mm<sup>2</sup> / 20 AWG; insulated; electro-tin plated; electrolytic copper; gastight crimped; acc. to DIN 46228, Part 4/09.90; white



**Item No.: 216-242**

Ferrule; Sleeve for 0.75 mm<sup>2</sup> / 18 AWG; insulated; electro-tin plated; electrolytic copper; gastight crimped; acc. to DIN 46228, Part 4/09.90; gray



**Item No.: 216-262**

Ferrule; Sleeve for 0.75 mm<sup>2</sup> / 18 AWG; insulated; electro-tin plated; electrolytic copper; gastight crimped; acc. to DIN 46228, Part 4/09.90; gray



**Item No.: 216-243**

Ferrule; Sleeve for 1 mm<sup>2</sup> / AWG 18; insulated; electro-tin plated; electrolytic copper; gastight crimped; acc. to DIN 46228, Part 4/09.90; red



**Item No.: 216-263**

Ferrule; Sleeve for 1 mm<sup>2</sup> / AWG 18; insulated; electro-tin plated; electrolytic copper; gastight crimped; acc. to DIN 46228, Part 4/09.90; red



**Item No.: 216-244**

Ferrule; Sleeve for 1.5 mm<sup>2</sup> / AWG 16; insulated; electro-tin plated; electrolytic copper; gastight crimped; acc. to DIN 46228, Part 4/09.90; black



**Item No.: 216-264**

Ferrule; Sleeve for 1.5 mm<sup>2</sup> / AWG 16; insulated; electro-tin plated; electrolytic copper; gastight crimped; acc. to DIN 46228, Part 4/09.90; black



**Item No.: 216-284**

Ferrule; Sleeve for 1.5 mm<sup>2</sup> / AWG 16; insulated; electro-tin plated; electrolytic copper; gastight crimped; acc. to DIN 46228, Part 4/09.90; black



**Item No.: 216-246**

Ferrule; Sleeve for 2.5 mm<sup>2</sup> / AWG 14; insulated; electro-tin plated; electrolytic copper; gastight crimped; acc. to DIN 46228, Part 4/09.90; blue



**Item No.: 216-266**

Ferrule; Sleeve for 2.5 mm<sup>2</sup> / AWG 14; insulated; electro-tin plated; electrolytic copper; gastight crimped; acc. to DIN 46228, Part 4/09.90; blue



**Item No.: 216-286**

Ferrule; Sleeve for 2.5 mm<sup>2</sup> / AWG 14; insulated; electro-tin plated; electrolytic copper; gastight crimped; acc. to DIN 46228, Part 4/09.90; blue

### 1.3.4 Insulation stop

#### 1.3.4.1 Insulation stop



**Item No.: 2002-171**

Insulation stop; 0.25 - 0.5 mm<sup>2</sup>; 5 pieces/strip; light gray



**Item No.: 2002-172**

Insulation stop; 0.75 - 1 mm<sup>2</sup>; 5 pieces/strip; dark gray

1.3.5 Jumper

1.3.5.1 Jumper

|   |  |   |  |
|---|--|---|--|
| <br><b>Item No.: 2002-400</b><br>Continuous jumper; 2-way; insulated; light gray                       | <br><b>Item No.: 2002-413</b><br>Continuous jumper; 3-way; insulated; light gray        | <br><b>Item No.: 2002-415</b><br>Continuous jumper; 5-way; insulated; light gray         | <br><b>Item No.: 2002-423/000-006</b><br>Continuous jumper; from 1 to 3; insulated; blue  |
| <br><b>Item No.: 2002-423</b><br>Continuous jumper; from 1 to 3; insulated; light gray                 | <br><b>Item No.: 2002-423/000-005</b><br>Continuous jumper; from 1 to 3; insulated; red | <br><b>Item No.: 2002-424/000-006</b><br>Continuous jumper; from 1 to 4; insulated; blue | <br><b>Item No.: 2002-424</b><br>Continuous jumper; from 1 to 4; insulated; light gray    |
| <br><b>Item No.: 2002-424/000-005</b><br>Continuous jumper; from 1 to 4; insulated; red                | <br><b>Item No.: 2002-406/020-000</b><br>Delta jumper; insulated; light gray            | <br><b>Item No.: 2002-410/000-006</b><br>Jumper; 10-way; insulated; blue                 | <br><b>Item No.: 2002-410</b><br>Jumper; 10-way; insulated; light gray                    |
| <br><b>Item No.: 2002-410/000-005</b><br>Jumper; 10-way; insulated; red                                | <br><b>Item No.: 2002-402/000-006</b><br>Jumper; 2-way; insulated; blue                 | <br><b>Item No.: 2002-402</b><br>Jumper; 2-way; insulated; light gray                    | <br><b>Item No.: 2002-402/000-005</b><br>Jumper; 2-way; insulated; red                    |
| <br><b>Item No.: 2002-403/000-006</b><br>Jumper; 3-way; insulated; blue                                | <br><b>Item No.: 2002-403</b><br>Jumper; 3-way; insulated; light gray                   | <br><b>Item No.: 2002-403/000-005</b><br>Jumper; 3-way; insulated; red                   | <br><b>Item No.: 2002-404/000-006</b><br>Jumper; 4-way; insulated; blue                   |
| <br><b>Item No.: 2002-404</b><br>Jumper; 4-way; insulated; light gray                                  | <br><b>Item No.: 2002-404/000-005</b><br>Jumper; 4-way; insulated; red                  | <br><b>Item No.: 2002-405/000-006</b><br>Jumper; 5-way; insulated; blue                  | <br><b>Item No.: 2002-405</b><br>Jumper; 5-way; insulated; light gray                     |
| <br><b>Item No.: 2002-405/000-005</b><br>Jumper; 5-way; insulated; red                               | <br><b>Item No.: 2002-406/000-006</b><br>Jumper; 6-way; insulated; blue               | <br><b>Item No.: 2002-406</b><br>Jumper; 6-way; insulated; light gray                  | <br><b>Item No.: 2002-406/000-005</b><br>Jumper; 6-way; insulated; red                  |
| <br><b>Item No.: 2002-407/000-006</b><br>Jumper; 7-way; insulated; blue                              | <br><b>Item No.: 2002-407</b><br>Jumper; 7-way; insulated; light gray                 | <br><b>Item No.: 2002-407/000-005</b><br>Jumper; 7-way; insulated; red                 | <br><b>Item No.: 2002-408/000-006</b><br>Jumper; 8-way; insulated; blue                 |
| <br><b>Item No.: 2002-408</b><br>Jumper; 8-way; insulated; light gray                                | <br><b>Item No.: 2002-408/000-005</b><br>Jumper; 8-way; insulated; red                | <br><b>Item No.: 2002-409/000-006</b><br>Jumper; 9-way; insulated; blue                | <br><b>Item No.: 2002-409</b><br>Jumper; 9-way; insulated; light gray                   |
| <br><b>Item No.: 2002-409/000-005</b><br>Jumper; 9-way; insulated; red                               | <br><b>Item No.: 2002-440</b><br>Jumper; from 1 to 10; insulated; light gray          | <br><b>Item No.: 2002-433</b><br>Jumper; from 1 to 3; insulated; light gray            | <br><b>Item No.: 2002-434</b><br>Jumper; from 1 to 4; insulated; light gray             |
| <br><b>Item No.: 2002-435</b><br>Jumper; from 1 to 5; insulated; light gray                          | <br><b>Item No.: 2002-436</b><br>Jumper; from 1 to 6; insulated; light gray           | <br><b>Item No.: 2002-437</b><br>Jumper; from 1 to 7; insulated; light gray            | <br><b>Item No.: 2002-438</b><br>Jumper; from 1 to 8; insulated; light gray             |
| <br><b>Item No.: 2002-439</b><br>Jumper; from 1 to 9; insulated; light gray                          | <br><b>Item No.: 2002-480</b><br>Staggered jumper; 10-way; insulated; light gray      | <br><b>Item No.: 2002-481</b><br>Staggered jumper; 11-way; insulated; light gray       | <br><b>Item No.: 2002-482</b><br>Staggered jumper; 12-way; insulated; light gray        |
| <br><b>Item No.: 2002-473/011-000</b><br>Staggered jumper; 2-way; from 1 to 3; insulated; light gray | <br><b>Item No.: 2002-472</b><br>Staggered jumper; 2-way; insulated; light gray       | <br><b>Item No.: 2002-473</b><br>Staggered jumper; 3-way; insulated; light gray        | <br><b>Item No.: 2002-475/011-000</b><br>Staggered jumper; 3-way; insulated; light gray |
| <br><b>Item No.: 2002-474</b><br>Staggered jumper; 4-way; insulated; light gray                      | <br><b>Item No.: 2002-475</b><br>Staggered jumper; 5-way; insulated; light gray       | <br><b>Item No.: 2002-476</b><br>Staggered jumper; 6-way; insulated; light gray        | <br><b>Item No.: 2002-477</b><br>Staggered jumper; 7-way; insulated; light gray         |

### 1.3.5.1 Jumper



**Item No.: 2002-478**  
Staggered jumper; 8-way; insulated; light gray



**Item No.: 2002-479**  
Staggered jumper; 9-way; insulated; light gray



**Item No.: 2002-477/011-000**  
Staggered jumper; insulated; light gray



**Item No.: 2002-479/011-000**  
Staggered jumper; insulated; light gray



**Item No.: 2002-481/011-000**  
Staggered jumper; insulated; light gray



**Item No.: 2002-405/011-000**  
Star point jumper; 3-way; insulated; light gray



**Item No.: 210-103**  
Wire commoning chain; insulated; black



**Item No.: 210-123**  
Wire commoning chain; insulated; blue

### 1.3.6 Marking

#### 1.3.6.1 Group marker carrier



**Item No.: 2009-191**  
Group marker carrier; gray



**Item No.: 2009-192**  
Group marker carrier; gray



**Item No.: 2009-193**  
Group marker carrier; gray

#### 1.3.6.2 Marker



**Item No.: 2009-145**  
Mini-WSB Inline; for Smart Printer; 1700 pieces on roll; stretchable 5 - 5.2 mm; plain; snap-on type; white



**Item No.: 248-501**  
Mini-WSB marking card; as card; not stretchable; plain; snap-on type; white



**Item No.: 793-5501**  
WMB marking card; as card; for terminal block width 5 - 17.5 mm; stretchable 5 - 5.2 mm; plain; snap-on type; white



**Item No.: 2009-115**  
WMB-Inline; for Smart Printer; 1500 pieces on roll; stretchable 5 - 5.2 mm; plain; snap-on type; white

#### 1.3.6.3 Marker carrier



**Item No.: 2002-161**  
Adaptor; gray



**Item No.: 2009-198**  
Adaptor; gray

#### 1.3.6.4 Marking strip



**Item No.: 2009-110**  
Marking strips; for Smart Printer; on reel; not stretchable; plain; snap-on type; white

### 1.3.7 Protective warning marker

#### 1.3.7.1 Cover



**Item No.: 2002-115**  
Protective warning marker; for 5 terminal blocks; with high-voltage symbol, black; yellow

### 1.3.8 Push-in type wire jumper

#### 1.3.8.1 Jumper



**Item No.: 2009-414**

Push-in type wire jumper; 1.5 mm<sup>2</sup>; insulated; 110 mm long; black



**Item No.: 2009-414/000-005**

Push-in type wire jumper; 1.5 mm<sup>2</sup>; insulated; 110 mm long; black



**Item No.: 2009-416**

Push-in type wire jumper; 1.5 mm<sup>2</sup>; insulated; 250 mm long; black



**Item No.: 2009-414/000-006**

Push-in type wire jumper; insulated; 110 mm long; black



**Item No.: 2009-412**

Push-in type wire jumper; insulated; 60 mm long; black

### 1.3.9 Screwless end stop

#### 1.3.9.1 Mounting accessories



**Item No.: 249-117**

Screwless end stop; 10 mm wide; for DIN-rail 35 x 15 and 35 x 7.5; gray



**Item No.: 249-116**

Screwless end stop; 6 mm wide; for DIN-rail 35 x 15 and 35 x 7.5; gray

### 1.3.10 Test and measurement

#### 1.3.10.1 Testing accessories



**Item No.: 2002-560**

Modular TOPJOB®S connector; modular; for jumper contact slot; 10-pole; gray



**Item No.: 2002-511**

Modular TOPJOB®S connector; modular; for jumper contact slot; 1-pole; gray



**Item No.: 2002-552**

Modular TOPJOB®S connector; modular; for jumper contact slot; 2-pole; gray



**Item No.: 2002-553**

Modular TOPJOB®S connector; modular; for jumper contact slot; 3-pole; gray



**Item No.: 2002-554**

Modular TOPJOB®S connector; modular; for jumper contact slot; 4-pole; gray



**Item No.: 2002-555**

Modular TOPJOB®S connector; modular; for jumper contact slot; 5-pole; gray



**Item No.: 2002-556**

Modular TOPJOB®S connector; modular; for jumper contact slot; 6-pole; gray



**Item No.: 2002-557**

Modular TOPJOB®S connector; modular; for jumper contact slot; 7-pole; gray



**Item No.: 2002-558**

Modular TOPJOB®S connector; modular; for jumper contact slot; 8-pole; gray



**Item No.: 2002-559**

Modular TOPJOB®S connector; modular; for jumper contact slot; 9-pole; gray



**Item No.: 2002-549**

Spacer module; modular; e.g., for bridging commoned terminal blocks; gray



**Item No.: 2009-174**

Test plug adapter; for 4 mm Ø test plugs; for testing TOPJOB®S rail-mounted terminal blocks; gray



**Item No.: 2009-182**

Testing tap; for max. 2.5 mm<sup>2</sup>; tool-free connection for individual test wires 0.08 - 2.5 mm; gray



**Item No.: 859-500**

WAGO Test pin; 1 mm Ø; 30 V AC / 60 V DC; CAT0; 1 A; 10 mm uninsulated; Test lead for soldering up to 0,5mm<sup>2</sup>

### 1.3.11 Tool

#### 1.3.11.1 Operating tool



**Item No.: 210-720**

Operating tool; Blade: 3.5 x 0.5 mm; with a partially insulated shaft; multicoloured

### Installation Notes


#### Installation



Snap individual carrier terminal blocks onto the DIN-rail and slide together.



Open the assembly by laterally sliding a block via operating tool (3.5 x 0.5 mm blade).



Separate terminal block assembly and slide individual terminal blocks laterally using an operating tool.

### Conductor termination



Push-in CAGE CLAMP® enables solid conductors to be connected by simply pushing them into the unit.


### Commoning



Commoning X-COM®S-SYSTEM Terminal Blocks using jumpers for TOPJOB® S Terminal Blocks. An end plate provides connection to TOPJOB® S Terminal Blocks. 2020 and 2022 Series Terminal Blocks are combinable. Jumper slots are on the same level for both series.



Pairing push-in comb style jumpers.




Commoning with push-in type wire jumper.

### Testing



Test plug adapter (Item No. 2009-174) for 4 mm test plugs or banana plugs – also suitable for X-COM®S-SYSTEM-MINI Terminal Blocks.


## Coding




Insert coding pin into the corresponding slot and twist it off.



Coding a female plug: remove coding finger using a suitable tool.



Insert a coding pin (Item No. 2022-100) into the corresponding location of the carrier terminal block.




Carrier terminal block

## Ex application




630 V = rated voltage for use in Zone 2 hazardous areas, "ec" type of protection  
 Ex marking:  
 "Ex" sign and extended item number ".../999-953" are printed on the side of both carrier terminal blocks and female plugs with Ex approval.  
 Shorter locking lever (factory-mounted) makes accidental disconnection more difficult.

## Marking



Clear marking via large marking area



Group marking with height-adjustable group marker carrier (Item No. 2009-163)

## Security



Carrier terminal blocks and female plugs are touch-proof.

Subject to changes. Please also observe the further product documentation!

Current addresses can be found at: [www.wago.com](http://www.wago.com)