



### Features

- Low profile surface and suspended LED diffuser luminaire, 1218mm x 200mm, 4000K Neutral White, Electronic, Emergency 3 hour maintained, 4030lm, 39W, lifespan: 55,000 hours L90B10, A++ A+ A

### Product Overview


<b>Product name</b>	DELTAWING LED40 EB 4K E3 1200
<b>Technology</b>	LED
<b>Cap/Base</b>	N/A
<b>Housing</b>	Steel
<b>Mount</b>	Ceiling surface mounting, Suspended
<b>Fixture rating</b>	Enclosed
<b>Environment</b>	Internal
<b>Fixture luminous flux (lm)</b>	4030
<b>Luminaire efficacy (lm/W)</b>	103.33
<b>LOR (%)</b>	100
<b>Colour temperature (K)</b>	4000
<b>Light colour</b>	Neutral White
<b>CRI (Ra)</b>	80
<b>Colour Consistency (SDCM)</b>	3
<b>Colour Variation Initial (SDCM)</b>	3
<b>Glare control</b>	< 22
<b>Photobiological Risk Group</b>	RG1
<b>Total power consumption (W)</b>	39
<b>Electrical protection</b>	Class I
<b>Control gear type</b>	Electronic ballast
<b>LED Flickering Rate</b>	Ultra low (5% or less)

Light your world


## DELTAWING LED40 EB 4K E3 1200 0044877

Housing colour	White
IP rating	IP44
IK rating	IK08
Product EAN number	5410288448770
Warranty	5 years

### Photometry

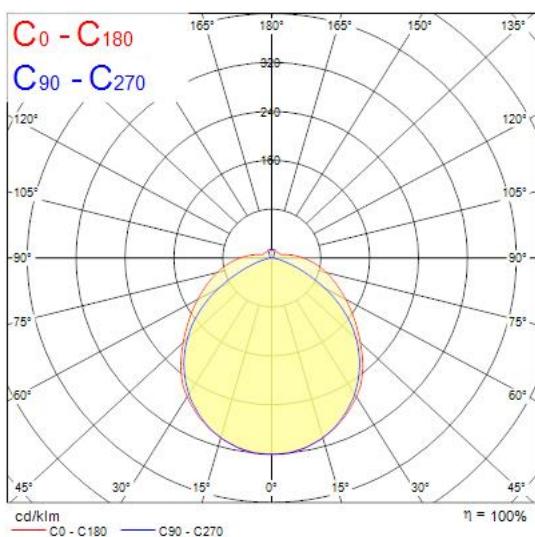

### Technical drawings

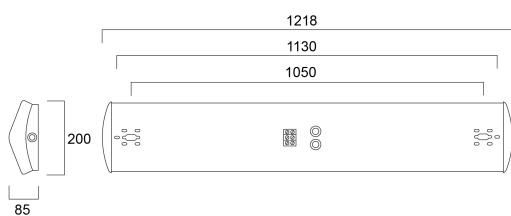

Light your world