



### Features

- Simple and slick integral design. Extremely precise light beams due to the high-quality lenses. Easily replaceable lens system, die-cast aluminium body, beam angle: 36°, and 54° beam angle included in the packaging, Textured black finishing colour. Light color temperature: 2700-3000-4000K, 3-CCT switch on the housing of the product, System power: 29W, Fixture lumen output: 3200lm, efficacy: 110lm/W, Ra90 typical, LED chromacity: 3 step MacAdam ellipse LED source (SDCM3), IR/UV free light source without heat radiation. Operating voltage 220-240V / 50-60Hz, DALI-2 dimmable driver, ultra low LED flickering rate (5% or less). Suitable for ceiling surface mounting, wall surface mounting. Electrical protection: Class II. Degree of protection: IP20, suitable for indoor environment only. Push-in terminals for quick installation. Lifespan up to 100,000h, L90B10. Horizontal rotation: 345°, vertical tilt: 90°. Nominal product dimensions: D.81mmx250mm. 5 years warranty. Recycling instructions for extra lens in this product: please contact us for recycling instructions or disposal.


### Product Overview

<b>Product name</b>	PIXO SURFACE 3200LM 3CCT MB WB DALI BLACK
<b>Technology</b>	LED
<b>Cap/Base</b>	N/A
<b>Housing</b>	Aluminium
<b>Mount</b>	Ceiling surface mounting, Wall surface mounted
<b>General application</b>	Museums & Galleries, Retail
<b>ETIM Class</b>	EC002892
<b>E-number FI</b>	4279958
<b>Fixture luminous flux (lm)</b>	3200

## PIXO SURFACE 3200LM 3CCT MB WB DALI BLACK 0004724

Luminaire efficacy (lm/W)	110
Light colour	N/A
CRI (Ra)	90
Colour Variation Initial (SDCM)	3
Photobiological Risk Group	RG1
Total power consumption (W)	29
Electrical protection	Class II
Control gear type	LED driver constant current
Dimmable	Yes
Minimum dimming level (%)	1
Housing colour	Black
IP rating	IP20
IK rating	IK03
Product EAN number	5410288047249
Warranty	5 years
Dimming method	DALI-2

### Photometry

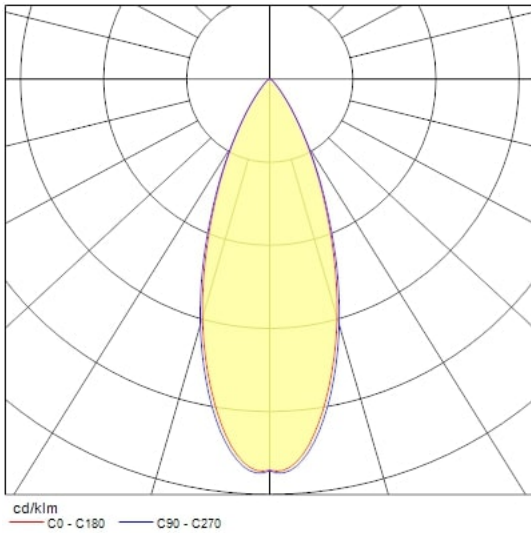

### Technical drawings

