



Data Sheet | Item Number: 2204-1611/1000-836

2-conductor fuse terminal block; with pivoting fuse holder; for 5 x 20 mm miniature metric fuse; with push-button; with blown fuse indication by LED; 230 V; for DIN-rail 35 x 15 and 35 x 7.5; 4 mm<sup>2</sup>; Push-in CAGE CLAMP®; 4,00 mm<sup>2</sup>; gray


<https://www.wago.com/2204-1611/1000-836>

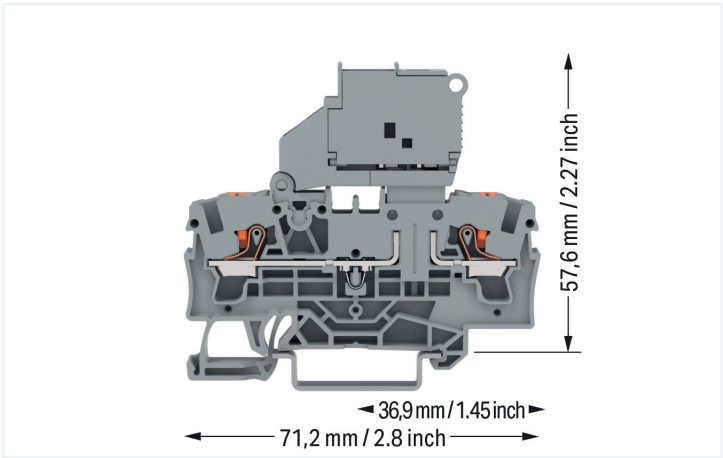


Similar to illustration

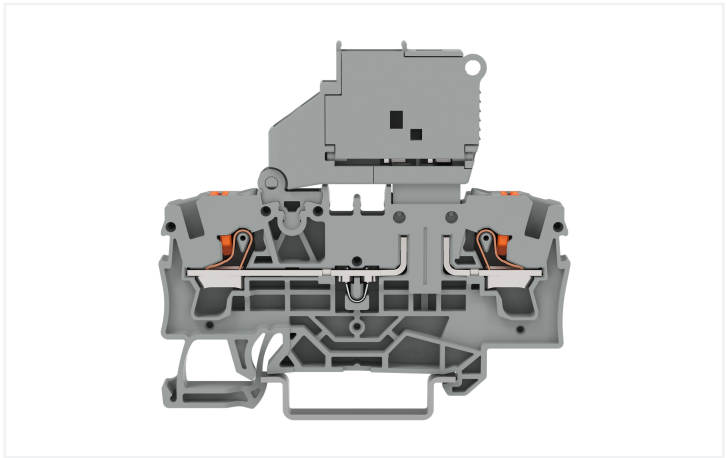

Similar to illustration

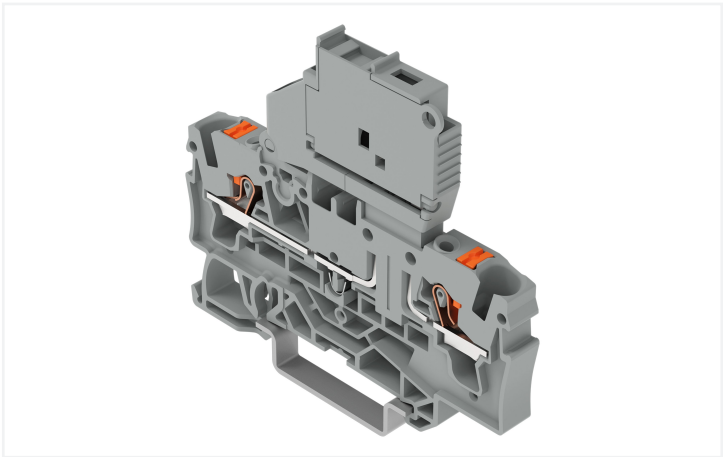

Similar to illustration

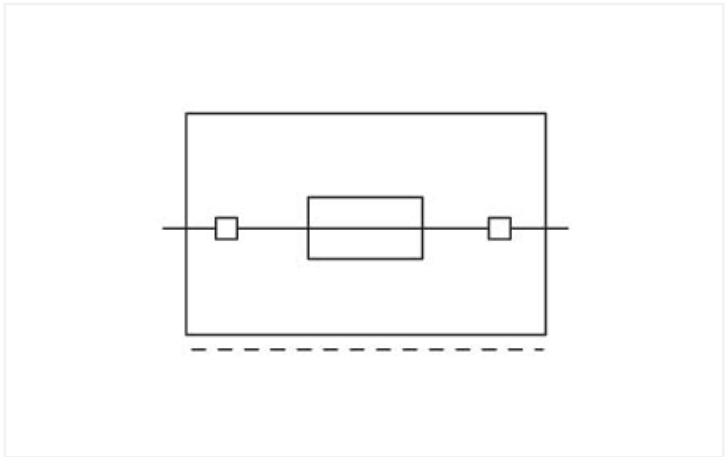

Similar to illustration

Electrical data

| Ratings per          | IEC/EN 60947-7-3 |     |    |
|----------------------|------------------|-----|----|
| Overvoltage category | III              | III | II |
| Pollution degree     | 3                | 2   | 2  |
| Nominal voltage      | 250 V            | -   | -  |
| Rated surge voltage  | 6 kV             | -   | -  |
| Rated current        | 6.3 A            | -   | -  |

| Ratings per IEC/EN – Notes |                                           |
|----------------------------|-------------------------------------------|
| Ratings (note)             | Electrical ratings are given by the fuse. |

| Ratings per          | IEC/EN 60947-7-3 |     |    |
|----------------------|------------------|-----|----|
| Overvoltage category | III              | III | II |
| Pollution degree     | 3                | 2   | 2  |
| Nominal voltage      | 230 V            | -   | -  |
| Rated surge voltage  | -                | -   | -  |
| Rated current        | -                | -   | -  |

| Approvals per | UL 1059 |       |       |
|---------------|---------|-------|-------|
| Use group     | B       | C     | D     |
| Rated voltage | 250 V   | 250 V | 250 V |
| Rated current | 10 A    | 10 A  | 10 A  |



| Approvals per |  | CSA 22.2 No 158 |       |   |
|---------------|--|-----------------|-------|---|
| Use group     |  | B               | C     | D |
| Rated voltage |  | 250 V           | 250 V | - |
| Rated current |  | 6.3 A           | 6.3 A | - |

| Power Loss                                                                       |       |
|----------------------------------------------------------------------------------|-------|
| Power loss P <sub>I</sub> max. short-circuit protection (individual arrangement) | 1.6 W |

Connection data

|                            |   |
|----------------------------|---|
| Clamping units             | 2 |
| Total number of potentials | 1 |
| Number of levels           | 1 |

| Connection 1                                               |                                                                                                                                   |
|------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------|
| Connection technology                                      | Push-in CAGE CLAMP®                                                                                                               |
| Actuation type                                             | Push-button                                                                                                                       |
| Connectable conductor materials                            | Copper                                                                                                                            |
| Nominal cross-section                                      | 4 mm²                                                                                                                             |
| Solid conductor                                            | 0.5 ... 6 mm² / 20 ... 10 AWG                                                                                                     |
| Solid conductor; push-in termination                       | 1 ... 6 mm² / 14 ... 10 AWG                                                                                                       |
| Stranded conductor                                         | 0.5 ... 6 mm² / 20 ... 10 AWG                                                                                                     |
| Fine-stranded conductor                                    | 0.5 ... 6 mm² / 20 ... 10 AWG                                                                                                     |
| Fine-stranded conductor; with insulated ferrule            | 0.5 ... 4 mm² / 20 ... 12 AWG                                                                                                     |
| Fine-stranded conductor; with uninsulated ferrule          | 1.5 ... 4 mm² / 18 ... 12 AWG                                                                                                     |
| Fine-stranded conductor; with ferrule; push-in termination | 1.5 ... 4 mm² / 18 ... 12 AWG                                                                                                     |
| Note (conductor cross-section)                             | Depending on the conductor characteristic, a conductor with a smaller cross-section can also be inserted via push-in termination. |
| Strip length                                               | 11 ... 13 mm / 0.43 ... 0.51 inches                                                                                               |
| Wiring direction                                           | Front-entry wiring                                                                                                                |

Physical data

|                                   |                        |
|-----------------------------------|------------------------|
| Width                             | 6.6 mm / 0.244 inches  |
| Height                            | 71.2 mm / 2.8 inches   |
| Depth from upper-edge of DIN-rail | 57.6 mm / 2.268 inches |
| Depth                             | 64.2 mm / 2.457 inches |

Mechanical data

|               |                            |
|---------------|----------------------------|
| Mounting type | DIN-35 rail                |
| Marking level | Center/side marking        |
| Type of fuse  | Cylindrical fuse 5 x 20 mm |

Material data

|                      |                                                                          |
|----------------------|--------------------------------------------------------------------------|
| Note (material data) | <a href="#">Information on material specifications can be found here</a> |
| Fire load            | 0.222 MJ                                                                 |
| Weight               | 14.7 g                                                                   |



| Commercial data       |               |
|-----------------------|---------------|
| PU (SPU)              | 50 pcs        |
| Packaging type        | Box           |
| Country of origin     | CN            |
| GTIN                  | 4066966575415 |
| Customs tariff number | 85369095000   |

| Environmental Product Compliance |                        |
|----------------------------------|------------------------|
| RoHS Compliance Status           | Compliant,No Exemption |

| Downloads              |                                                                                                        |
|------------------------|--------------------------------------------------------------------------------------------------------|
| Documentation          |                                                                                                        |
| Additional Information |                                                                                                        |
| Technical Section      | pdf<br>2246.92 KB<br> |

1 Compatible Products

1.1 Required Accessories

1.1.1 End plate

1.1.1.1 End plate

|                                                                                     |                                                                                       |                                                                                                            |
|-------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------|
|  |    |                        |
| <a href="#">Item No.: 2004-1691</a><br>End and intermediate plate; 1 mm thick; gray | <a href="#">Item No.: 2004-1692</a><br>End and intermediate plate; 1 mm thick; orange | <a href="#">Item No.: 209-191</a><br>Separator for Ex e/Ex i applications; 3 mm thick; 120 mm wide; orange |

1.2 Optional Accessories

1.2.1 DIN-rail

1.2.1.1 Mounting accessories

|                                                                                                                                                         |                                                                                                                                                        |                                                                                                                                                       |                                                                                                                                                          |
|---------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------|
|                                                                      |                                                                     |                                                                   |                                                                     |
| <a href="#">Item No.: 210-196</a><br>Aluminum carrier rail; 35 x 8.2 mm; 1.6 mm thick; 2 m long; unslopped; similar to EN 60715; silver-colored         | <a href="#">Item No.: 210-198</a><br>Copper carrier rail; 35 x 15 mm; 2.3 mm thick; 2 m long; unslopped; according to EN 60715; copper-colored         | <a href="#">Item No.: 210-508</a><br>Steel carrier rail; 35 x 15 mm; 1.5 mm thick; 2 m long; slopped; galvanized; similar to EN 60715; silver-colored | <a href="#">Item No.: 210-197</a><br>Steel carrier rail; 35 x 15 mm; 1.5 mm thick; 2 m long; slopped; similar to EN 60715; silver-colored                |
|                                                                      |                                                                     |                                                                   |                                                                     |
| <a href="#">Item No.: 210-506</a><br>Steel carrier rail; 35 x 15 mm; 1.5 mm thick; 2 m long; unslopped; galvanized; similar to EN 60715; silver-colored | <a href="#">Item No.: 210-114</a><br>Steel carrier rail; 35 x 15 mm; 1.5 mm thick; 2 m long; unslopped; similar to EN 60715; silver-colored            | <a href="#">Item No.: 210-118</a><br>Steel carrier rail; 35 x 15 mm; 2.3 mm thick; 2 m long; unslopped; according to EN 60715; silver-colored         | <a href="#">Item No.: 210-115</a><br>Steel carrier rail; 35 x 7.5 mm; 1 mm thick; 2 m long; slopped; according to EN 60715; silver-colored               |
|                                                                      |                                                                     |                                                                   |                                                                     |
| <a href="#">Item No.: 210-112</a><br>Steel carrier rail; 35 x 7.5 mm; 1 mm thick; 2 m long; slopped; according to EN 60715; silver-colored              | <a href="#">Item No.: 210-504</a><br>Steel carrier rail; 35 x 7.5 mm; 1 mm thick; 2 m long; slopped; galvanized; according to EN 60715; silver-colored | <a href="#">Item No.: 210-113</a><br>Steel carrier rail; 35 x 7.5 mm; 1 mm thick; 2 m long; unslopped; according to EN 60715; silver-colored          | <a href="#">Item No.: 210-505</a><br>Steel carrier rail; 35 x 7.5 mm; 1 mm thick; 2 m long; unslopped; galvanized; according to EN 60715; silver-colored |



1.2.2 End plate

1.2.2.1 End plate



**Item No.: 2002-991**  
End plate for fuse terminal blocks; 2 mm thick; gray



**Item No.: 2002-992**  
End plate for fuse terminal blocks; 2 mm thick; orange

1.2.3 Ferrule

1.2.3.1 Ferrule



**Item No.: 216-241**  
Ferrule; Sleeve for 0.5 mm² / 20 AWG; insulated; electro-tin plated; electrolytic copper; gastight crimped; acc. to DIN 46228, Part 4/09.90; white



**Item No.: 216-242**  
Ferrule; Sleeve for 0.75 mm² / 18 AWG; insulated; electro-tin plated; electrolytic copper; gastight crimped; acc. to DIN 46228, Part 4/09.90; gray



**Item No.: 216-262**  
Ferrule; Sleeve for 0.75 mm² / 18 AWG; insulated; electro-tin plated; electrolytic copper; gastight crimped; acc. to DIN 46228, Part 4/09.90; gray



**Item No.: 216-243**  
Ferrule; Sleeve for 1 mm² / AWG 18; insulated; electro-tin plated; electrolytic copper; gastight crimped; acc. to DIN 46228, Part 4/09.90; red



**Item No.: 216-263**  
Ferrule; Sleeve for 1 mm² / AWG 18; insulated; electro-tin plated; electrolytic copper; gastight crimped; acc. to DIN 46228, Part 4/09.90; red



**Item No.: 216-244**  
Ferrule; Sleeve for 1.5 mm² / AWG 16; insulated; electro-tin plated; electrolytic copper; gastight crimped; acc. to DIN 46228, Part 4/09.90; black



**Item No.: 216-264**  
Ferrule; Sleeve for 1.5 mm² / AWG 16; insulated; electro-tin plated; electrolytic copper; gastight crimped; acc. to DIN 46228, Part 4/09.90; black



**Item No.: 216-246**  
Ferrule; Sleeve for 2.5 mm² / AWG 14; insulated; electro-tin plated; electrolytic copper; gastight crimped; acc. to DIN 46228, Part 4/09.90; blue



**Item No.: 216-266**  
Ferrule; Sleeve for 2.5 mm² / AWG 14; insulated; electro-tin plated; electrolytic copper; gastight crimped; acc. to DIN 46228, Part 4/09.90; blue

1.2.4 Installation

1.2.4.1 Cover



**Item No.: 709-156**  
Cover; Type 3; suitable for cover carrier, type 3; 1 m long; transparent

1.2.4.2 Cover carrier



**Item No.: 709-169**  
Cover carrier; Type 3; incl. fixing/retaining screws and knurled nut; suitable for 279 to 282 and 880 Series rail-mounted terminal blocks; suitable for 264 Series miniature rail-mounted terminal blocks; suitable for 270 Series sensor and actuator terminal blocks; gray



1.2.5 Jumper

1.2.5.1 Jumper



Item No.: 2004-406/020-000  
Delta jumper; insulated; light gray



Item No.: 2004-410  
Jumper; 10-way; insulated; light gray



Item No.: 2004-402  
Jumper; 2-way; insulated; light gray



Item No.: 2004-403  
Jumper; 3-way; insulated; light gray



Item No.: 2004-404  
Jumper; 4-way; insulated; light gray



Item No.: 2004-405  
Jumper; 5-way; insulated; light gray



Item No.: 2004-406  
Jumper; 6-way; insulated; light gray



Item No.: 2004-407  
Jumper; 7-way; insulated; light gray



Item No.: 2004-408  
Jumper; 8-way; insulated; light gray



Item No.: 2004-409  
Jumper; 9-way; insulated; light gray



Item No.: 2004-440  
Jumper; from 1 to 10; insulated; light gray



Item No.: 2004-433  
Jumper; from 1 to 3; insulated; light gray



Item No.: 2004-434  
Jumper; from 1 to 4; insulated; light gray



Item No.: 2004-435  
Jumper; from 1 to 5; insulated; light gray



Item No.: 2004-436  
Jumper; from 1 to 6; insulated; light gray



Item No.: 2004-437  
Jumper; from 1 to 7; insulated; light gray



Item No.: 2004-438  
Jumper; from 1 to 8; insulated; light gray



Item No.: 2004-439  
Jumper; from 1 to 9; insulated; light gray



Item No.: 2004-405/011-000  
Star point jumper; 3-way; insulated; light gray



Item No.: 210-103  
Wire commoning chain; insulated; black



Item No.: 210-123  
Wire commoning chain; insulated; blue

1.2.6 Locking system

1.2.6.1 Locking system



Item No.: 210-254  
Interlocking link; mechanically locks multiple links; 1 m long; transparent

1.2.7 Marking

1.2.7.1 Marker



Item No.: 2009-145/000-006  
Mini-WSB Inline; for Smart Printer; 1700 pieces on roll; stretchable 5 - 5.2 mm; plain; snap-on type; blue



Item No.: 2009-145/000-007  
Mini-WSB Inline; for Smart Printer; 1700 pieces on roll; stretchable 5 - 5.2 mm; plain; snap-on type; gray



Item No.: 2009-145/000-023  
Mini-WSB Inline; for Smart Printer; 1700 pieces on roll; stretchable 5 - 5.2 mm; plain; snap-on type; green



Item No.: 2009-145/000-012  
Mini-WSB Inline; for Smart Printer; 1700 pieces on roll; stretchable 5 - 5.2 mm; plain; snap-on type; orange



Item No.: 2009-145/000-005  
Mini-WSB Inline; for Smart Printer; 1700 pieces on roll; stretchable 5 - 5.2 mm; plain; snap-on type; red



Item No.: 2009-145/000-024  
Mini-WSB Inline; for Smart Printer; 1700 pieces on roll; stretchable 5 - 5.2 mm; plain; snap-on type; violet



Item No.: 2009-145  
Mini-WSB Inline; for Smart Printer; 1700 pieces on roll; stretchable 5 - 5.2 mm; plain; snap-on type; white



Item No.: 2009-145/000-002  
Mini-WSB Inline; for Smart Printer; 1700 pieces on roll; stretchable 5 - 5.2 mm; plain; snap-on type; yellow



Item No.: 248-501/000-006  
Mini-WSB marking card; as card; not stretchable; plain; snap-on type; blue



Item No.: 248-501/000-007  
Mini-WSB marking card; as card; not stretchable; plain; snap-on type; gray



Item No.: 248-501/000-023  
Mini-WSB marking card; as card; not stretchable; plain; snap-on type; green



Item No.: 248-501/000-017  
Mini-WSB marking card; as card; not stretchable; plain; snap-on type; light green



1.2.7.1 Marker



**Item No.: 248-501/000-012**  
Mini-WSB marking card; as card; not stretchable; plain; snap-on type; orange



**Item No.: 248-501/000-005**  
Mini-WSB marking card; as card; not stretchable; plain; snap-on type; red



**Item No.: 248-501/000-024**  
Mini-WSB marking card; as card; not stretchable; plain; snap-on type; violet



**Item No.: 248-501**  
Mini-WSB marking card; as card; not stretchable; plain; snap-on type; white



**Item No.: 248-501/000-002**  
Mini-WSB marking card; as card; not stretchable; plain; snap-on type; yellow



**Item No.: 793-5501/000-006**  
WMB marking card; as card; for terminal block width 5 - 17.5 mm; stretchable 5 - 5.2 mm; plain; snap-on type; blue



**Item No.: 793-5501/000-014**  
WMB marking card; as card; for terminal block width 5 - 17.5 mm; stretchable 5 - 5.2 mm; plain; snap-on type; brown



**Item No.: 793-5501/000-007**  
WMB marking card; as card; for terminal block width 5 - 17.5 mm; stretchable 5 - 5.2 mm; plain; snap-on type; gray



**Item No.: 793-5501/000-023**  
WMB marking card; as card; for terminal block width 5 - 17.5 mm; stretchable 5 - 5.2 mm; plain; snap-on type; green



**Item No.: 793-5501/000-017**  
WMB marking card; as card; for terminal block width 5 - 17.5 mm; stretchable 5 - 5.2 mm; plain; snap-on type; light green



**Item No.: 793-5501/000-012**  
WMB marking card; as card; for terminal block width 5 - 17.5 mm; stretchable 5 - 5.2 mm; plain; snap-on type; orange



**Item No.: 793-5501/000-005**  
WMB marking card; as card; for terminal block width 5 - 17.5 mm; stretchable 5 - 5.2 mm; plain; snap-on type; red



**Item No.: 793-5501/000-024**  
WMB marking card; as card; for terminal block width 5 - 17.5 mm; stretchable 5 - 5.2 mm; plain; snap-on type; violet



**Item No.: 793-5501**  
WMB marking card; as card; for terminal block width 5 - 17.5 mm; stretchable 5 - 5.2 mm; plain; snap-on type; white



**Item No.: 793-5501/000-002**  
WMB marking card; as card; for terminal block width 5 - 17.5 mm; stretchable 5 - 5.2 mm; plain; snap-on type; yellow



**Item No.: 2009-115/000-006**  
WMB-Inline; for Smart Printer; 1500 pieces on roll; stretchable 5 - 5.2 mm; plain; snap-on type; blue



**Item No.: 2009-115/000-007**  
WMB-Inline; for Smart Printer; 1500 pieces on roll; stretchable 5 - 5.2 mm; plain; snap-on type; gray



**Item No.: 2009-115/000-023**  
WMB-Inline; for Smart Printer; 1500 pieces on roll; stretchable 5 - 5.2 mm; plain; snap-on type; green



**Item No.: 2009-115/000-017**  
WMB-Inline; for Smart Printer; 1500 pieces on roll; stretchable 5 - 5.2 mm; plain; snap-on type; light green



**Item No.: 2009-115/000-012**  
WMB-Inline; for Smart Printer; 1500 pieces on roll; stretchable 5 - 5.2 mm; plain; snap-on type; orange



**Item No.: 2009-115/000-005**  
WMB-Inline; for Smart Printer; 1500 pieces on roll; stretchable 5 - 5.2 mm; plain; snap-on type; red



**Item No.: 2009-115/000-024**  
WMB-Inline; for Smart Printer; 1500 pieces on roll; stretchable 5 - 5.2 mm; plain; snap-on type; violet



**Item No.: 2009-115**  
WMB-Inline; for Smart Printer; 1500 pieces on roll; stretchable 5 - 5.2 mm; plain; snap-on type; white



**Item No.: 2009-115/000-002**  
WMB-Inline; for Smart Printer; 1500 pieces on roll; stretchable 5 - 5.2 mm; plain; snap-on type; yellow

1.2.7.2 Marking strip



**Item No.: 2009-110**  
Marking strips; for Smart Printer; on reel; not stretchable; plain; snap-on type; white

1.2.8 Screwless end stop

1.2.8.1 Mounting accessories



**Item No.: 249-117**  
Screwless end stop; 10 mm wide; for DIN-rail 35 x 15 and 35 x 7.5; gray



**Item No.: 249-116**  
Screwless end stop; 6 mm wide; for DIN-rail 35 x 15 and 35 x 7.5; gray

1.2.9 Test and measurement

1.2.9.1 Testing accessories



Item No.: 210-136  
Test plug; 2 mm Ø; with 500 mm cable; red

1.2.10 Tool

1.2.10.1 Operating tool



Item No.: 210-658  
Operating tool; Blade: 3.5 x 0.5 mm; with a partially insulated shaft; angled; short; multicoloured



Item No.: 210-720  
Operating tool; Blade: 3.5 x 0.5 mm; with a partially insulated shaft; multicoloured

Installation Notes

Conductor termination



All conductor types at a glance



Push-in termination of solid and ferruled conductors



Push-in termination of solid and ferruled conductors




Insert fine-stranded conductors via operating tool.






Removing all conductors via operating tool.

Commoning



Insert a push-in type jumper bar and push down until it hits the backstop.



Information from the mini-automotive, blade-type fuse manufacturers

| Operating Temp. °C | %    | F <sub>1</sub> |
|--------------------|------|----------------|
| -25                | 14   | 0.871          |
| -15                | 13   | 0.885          |
| -5                 | 12   | 0.899          |
| 5                  | 11   | 0.913          |
| 15                 | 10   | 0.927          |
| 25                 | 9    | 0.941          |
| 35                 | 8    | 0.955          |
| 45                 | 7    | 0.969          |
| 55                 | 6    | 0.983          |
| 65                 | 5    | 0.997          |
| 75                 | 4    | 1.011          |
| 85                 | 3    | 1.025          |
| 95                 | 2    | 1.039          |
| 105                | 1    | 1.053          |
| 115                | 0    | 1.067          |
| 125                | -1   | 1.081          |
| 135                | -2   | 1.095          |
| 145                | -3   | 1.109          |
| 155                | -4   | 1.123          |
| 165                | -5   | 1.137          |
| 175                | -6   | 1.151          |
| 185                | -7   | 1.165          |
| 195                | -8   | 1.179          |
| 205                | -9   | 1.193          |
| 215                | -10  | 1.207          |
| 225                | -11  | 1.221          |
| 235                | -12  | 1.235          |
| 245                | -13  | 1.249          |
| 255                | -14  | 1.263          |
| 265                | -15  | 1.277          |
| 275                | -16  | 1.291          |
| 285                | -17  | 1.305          |
| 295                | -18  | 1.319          |
| 305                | -19  | 1.333          |
| 315                | -20  | 1.347          |
| 325                | -21  | 1.361          |
| 335                | -22  | 1.375          |
| 345                | -23  | 1.389          |
| 355                | -24  | 1.403          |
| 365                | -25  | 1.417          |
| 375                | -26  | 1.431          |
| 385                | -27  | 1.445          |
| 395                | -28  | 1.459          |
| 405                | -29  | 1.473          |
| 415                | -30  | 1.487          |
| 425                | -31  | 1.501          |
| 435                | -32  | 1.515          |
| 445                | -33  | 1.529          |
| 455                | -34  | 1.543          |
| 465                | -35  | 1.557          |
| 475                | -36  | 1.571          |
| 485                | -37  | 1.585          |
| 495                | -38  | 1.599          |
| 505                | -39  | 1.613          |
| 515                | -40  | 1.627          |
| 525                | -41  | 1.641          |
| 535                | -42  | 1.655          |
| 545                | -43  | 1.669          |
| 555                | -44  | 1.683          |
| 565                | -45  | 1.697          |
| 575                | -46  | 1.711          |
| 585                | -47  | 1.725          |
| 595                | -48  | 1.739          |
| 605                | -49  | 1.753          |
| 615                | -50  | 1.767          |
| 625                | -51  | 1.781          |
| 635                | -52  | 1.795          |
| 645                | -53  | 1.809          |
| 655                | -54  | 1.823          |
| 665                | -55  | 1.837          |
| 675                | -56  | 1.851          |
| 685                | -57  | 1.865          |
| 695                | -58  | 1.879          |
| 705                | -59  | 1.893          |
| 715                | -60  | 1.907          |
| 725                | -61  | 1.921          |
| 735                | -62  | 1.935          |
| 745                | -63  | 1.949          |
| 755                | -64  | 1.963          |
| 765                | -65  | 1.977          |
| 775                | -66  | 1.991          |
| 785                | -67  | 2.005          |
| 795                | -68  | 2.019          |
| 805                | -69  | 2.033          |
| 815                | -70  | 2.047          |
| 825                | -71  | 2.061          |
| 835                | -72  | 2.075          |
| 845                | -73  | 2.089          |
| 855                | -74  | 2.103          |
| 865                | -75  | 2.117          |
| 875                | -76  | 2.131          |
| 885                | -77  | 2.145          |
| 895                | -78  | 2.159          |
| 905                | -79  | 2.173          |
| 915                | -80  | 2.187          |
| 925                | -81  | 2.201          |
| 935                | -82  | 2.215          |
| 945                | -83  | 2.229          |
| 955                | -84  | 2.243          |
| 965                | -85  | 2.257          |
| 975                | -86  | 2.271          |
| 985                | -87  | 2.285          |
| 995                | -88  | 2.299          |
| 1005               | -89  | 2.313          |
| 1015               | -90  | 2.327          |
| 1025               | -91  | 2.341          |
| 1035               | -92  | 2.355          |
| 1045               | -93  | 2.369          |
| 1055               | -94  | 2.383          |
| 1065               | -95  | 2.397          |
| 1075               | -96  | 2.411          |
| 1085               | -97  | 2.425          |
| 1095               | -98  | 2.439          |
| 1105               | -99  | 2.453          |
| 1115               | -100 | 2.467          |


**Application Notes on Terminal Blocks for Glass Cartridge Fuses**  
Diagram: "Individual Arrangement"

**Application Notes on Terminal Blocks for Glass Cartridge Fuses**  
Diagram: "Block Arrangement"


**Application Notes on Terminal Blocks for Glass Cartridge Fuses**  
Nominal current ratings for fuse cartridges are defined differently in international standards. This is why the recommended continuous current-carrying capacity of the fuses is a max. 80% of their nominal current according to DIN 72581/ Part 3 (for a surrounding air temperature of 23°C).  
Selecting the correct fuse cartridge is important for product safety within applications, as well as for fuse cartridge service life and reliability. Fuse cartridges will only operate perfectly as protection components (break-off point) if they are properly selected and used as intended (i.e., according to the state of the technology and valid specifications, as well as data sheet characteristics), according to basic safety requirements (i.e., persons, animals and property must be protected against hazards).

Concerning product safety, fuse cartridges must generally be tested under both normal and faulty operating conditions within your application.

Marking



Snapping a marking strip into a marker slot.



Snapping a marking strip into the marker slot.