


# STELLO COMFORT LED FIX WW + DB

Item No: 3079361


**SYLVANIA**

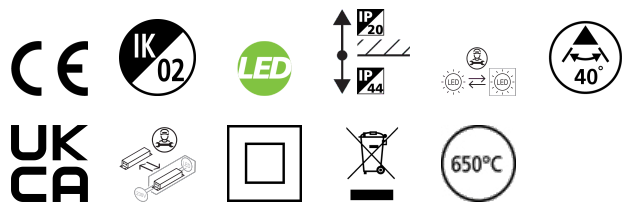

Fixed accent LED downlight, with deepened LED position for low glare and comfortable light. Wide range of tool less replaceable reflectors, complete with leading / trailing edge driver and Loop in Loop out connector, black aluminium heatsink and white front bezel, with sandblasted aluminium reflector, 884LM, 13W, 68lm/W, 3000K Driver current: 250mA, CRI80, 40° beam angle, leading / trailing edge dimmable, IP44, IK02, 35,000 hrs (L70), (WxD) 90x100mm,


## Technical Assets

### Dimensions (mm)

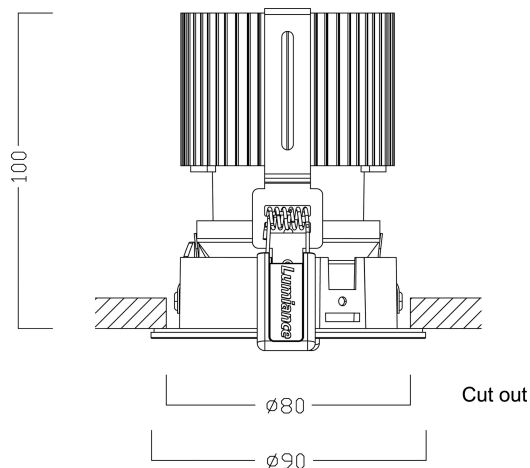

STELLO COMFORT LED FIXED

### Photometrics

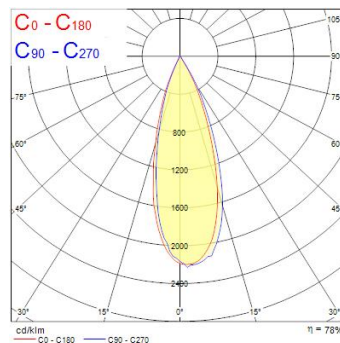

# STELLO COMFORT LED FIX WW + DB

Item No: 3079361

**SYLVANIA**

## General data

Product name	STELLO COMFORT LED FIX WW + DB
Technology	LED
Housing	Aluminium
Mount	Ceiling recessed mounting
Environment	Indoor
General application	Hospitality, Residential & Consumer
ETIM Class	EC001744
E-number FI	4271085
E-number SE	7475355
Warranty	3 years

## Optical data

Useful luminous flux ( $\Phi_{use}$ )	884
Fixture luminous flux (lm)	884
Luminaire efficacy (lm/W)	68
LOR (%)	100
Correlated colour temperature (k)	3000
Light colour	Warm White
CRI (Ra)	80
Adjustable chromaticity	N
Beam Angle (°)	40

## Electrical data

Total power consumption (W)	13
Primary Supply/Product voltage - min (V)	220
Primary Supply/Product voltage - max (V)	240
Electrical protection	Class II
Control gear type	Electronic ballast
Dimming method	Mains: leading / trailing edge
Drive current (mA)	250
Energy Efficiency Class (A->G) of contained light source	F

## Lifetime data

Lifespan L70 B50	100000
------------------	--------

## Physical data

Housing colour	White
IP rating	IP44/20
IK rating	IK02
Diffuser finish	Transparent
Diffuser material	Glass
Reflector finish	Matt
Nominal Product Height (mm)	110
Nominal Product Diameter (mm)	90
Weight (kg)	0.509
Recessed Depth (mm)	110

## Packaging

Product EAN number	8711971793618
Packaging single length / height (cm)	12.8
Packaging single width (cm)	15.7
Packaging single depth (cm)	10.0
DUN14 (inner)	18711971793615
Units per outer package	12
Packaging outer length / height (cm)	49.1
Packaging outer width (cm)	28.1
Packaging outer depth (cm)	22.6

## Safety data

Glow Wire Test (°C)	650
---------------------	-----