



Features

- Exterior LED Floodlight, comes complete with a 1000mm cable and adjustable bracket, aluminium housing, clear glass diffuser, IP66, IK08, Class I, 4000K, Non-dimming, 8787lm, 82W, 107lm/W, 2400mA, CRI70, 52°x117° beam angle, 50000hrs, (LxWxD) 66x290x333mm


Product Overview

Product name	Sylveo LED 8000LM RASYM 4K
Technology	LED
Housing	Aluminium
Mount	Wall surface mounted
Fixture rating	Enclosed
Environment	Internal/External
General application	Logistics & Industry
ETIM Class	EC001744
E-number FI	4579166
E-number SE	7763475
Fixture luminous flux (lm)	8787
Luminaire efficacy (lm/W)	107
LOR (%)	100
Correlated colour temperature (k)	4000
Light colour	Neutral White
CRI (Ra)	70
Colour Variation Initial (SDCM)	6
Beam Angle (°)	52 x 117
Glare control	< 18
Photobiological Risk Group	RG1
Total power consumption (W)	82.2

Sylveo LED 8000LM RASYM 4K 0049108

Electrical protection	Class I
Control gear type	LED driver constant current
Dimmable	No
LED Flickering Rate	Ultra low (5% or less)
Housing colour	RAL9006
IP rating	IP66
IK rating	IK08
Product EAN number	5410288491080
Warranty	5 years
Dimming method	N/A

Photometry

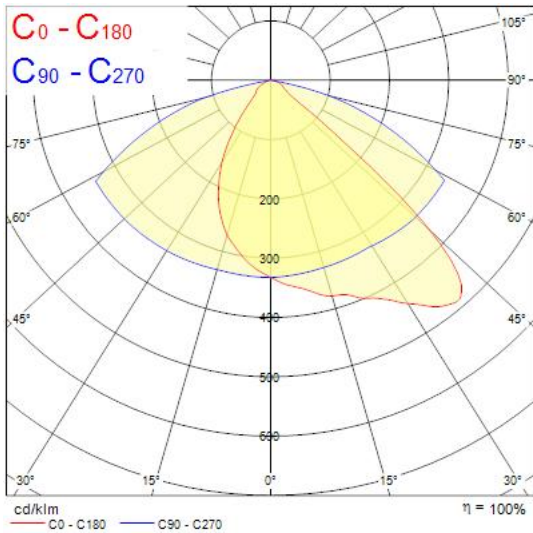

Technical drawings

