


Concord

MYRIAD DECO IP65 FLOOD 4000K PHDM BLACK WBEZ 2058900

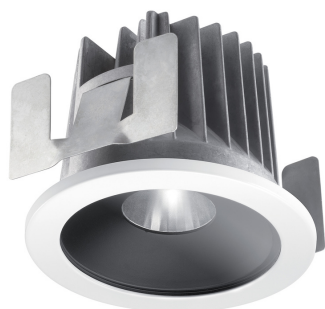

Features

- MYRIAD IP65 FLOOD 4000K Phase dimmable with black reflector and white bezel

Product Overview


Product name	MYRIAD DECO IP65 FLOOD 4000K PHDM BLACK WBEZ
Technology	LED
Cap/Base	N/A
Housing	Aluminium
Mount	Ceiling recessed mounting
Environment	Interior
General application	Hospitality, Office, Residential & Consumer, Retail
ETIM Class	EC001744
Fixture luminous flux (lm)	977
Luminaire efficacy (lm/W)	98
LOR (%)	100
Correlated colour temperature (k)	4000
Light colour	Neutral White
CRI (Ra)	90
Colour Variation Initial (SDCM)	3
Beam Angle (°)	46
Photobiological Risk Group	RG1
Total power consumption (W)	10
Electrical protection	Class II
Control gear type	Electronic ballast

Concord

MYRIAD DECO IP65 FLOOD 4000K PHDM BLACK WBEZ 2058900

Minimum dimming level (%)	10
Housing colour	Black
IP rating	IP65/20
IK rating	IK02
Product EAN number	5025768589005
Warranty	5 years
Dimming method	Other


Photometry

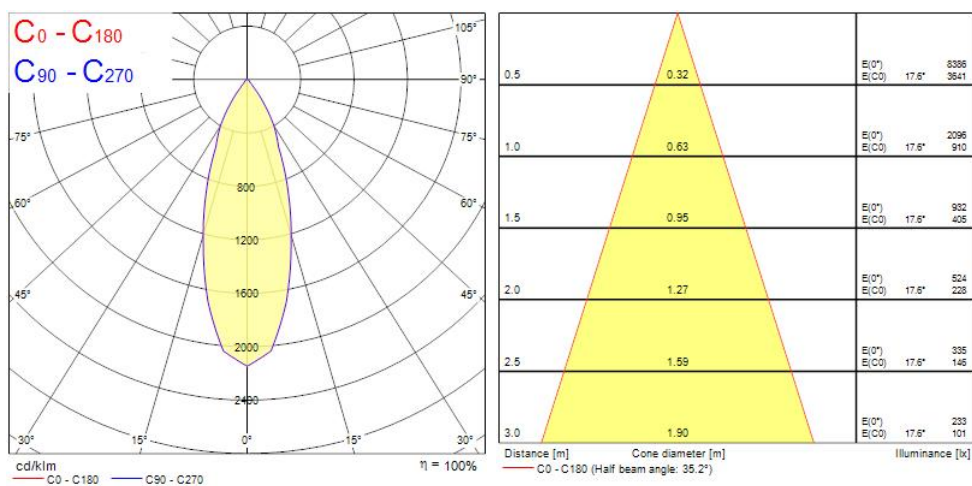

Concord

MYRIAD DECO IP65 FLOOD 4000K PHDM BLACK WBEZ 2058900

Technical drawings

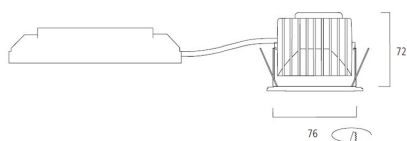

Dimensions (mm)

Data table

GENERAL DATA

Product name	MYRIAD DECO IP65 FLOOD 4000K PHDM BLACK WBEZ
Technology	LED
Cap/Base	N/A
Housing	Aluminium
Mount	Ceiling recessed mounting
Environment	Interior
General application	Hospitality, Office, Residential & Consumer, Retail
Performance ambient temperature Tq (°C)	25
ETIM Class	EC001744
Warranty	5 years

OPTICAL DATA

Fixture luminous flux (lm)	977
Luminaire efficacy (lm/W)	98

Concord

MYRIAD DECO IP65 FLOOD 4000K PHDM BLACK WBEZ 2058900

LOR (%)	100
Correlated colour temperature (k)	4000
Light colour	Neutral White
CRI (Ra)	90
Colour Variation Initial (SDCM)	3
Adjustable chromaticity	N
Beam Angle (°)	46
Photobiological Risk Group	RG1

ELECTRICAL DATA

Total power consumption (W)	10
Primary Supply/Product voltage - min (V)	230
Primary Supply/Product voltage - max (V)	240
Electrical protection	Class II
Control gear required	No
Control gear type	Electronic ballast
Dimming method	Other
Minimum dimming level (%)	10
Drive current (mA)	250
Energy Efficiency Class (A->G) of contained light source	E
Nominal Frequency (Hz)	50/60Hz

LIFETIME DATA

Lifespan L70 B50	100000
Lifespan L80 B20	100000
Lifespan L90 B10	68500

PHYSICAL DATA

Housing colour	Black
IP rating	IP65/20
IK rating	IK02
Diffuser finish	Bezel (or Ring)
Nominal Product Height (mm)	72

Concord

MYRIAD DECO IP65 FLOOD 4000K PHDM BLACK WBEZ 2058900

Nominal Product Diameter (mm)	90
Weight (kg)	0.44
Recessed Depth (mm)	72

PACKAGING

Product EAN number	5025768589005
Packaging single length / height (cm)	17.5
Packaging single width (cm)	15.0
Packaging single depth (cm)	17.5
DUN14 (inner)	05025768589005
Units per outer package	1
Packaging outer length / height (cm)	17.5
Packaging outer width (cm)	15.0
Packaging outer depth (cm)	17.5

SAFETY DATA

Special purpose lamp	No
Dry applications use only	No
Suitable for household illumination	No