

# Concord

## MYRIAD DECO IP65 FLOOD 4000K DALI WHITE WBEZ 2058877



### Features

- MYRD IP FL 4K DALI WHT WBEZ



### Product Overview


Product name	MYRIAD DECO IP65 FLOOD 4000K DALI WHITE WBEZ
Technology	LED
Cap/Base	N/A
Housing	Aluminium
Mount	Ceiling recessed mounting
Environment	Interior
General application	Hospitality, Office, Residential & Consumer, Retail
ETIM Class	EC001744
Fixture luminous flux (lm)	977
Luminaire efficacy (lm/W)	98
LOR (%)	100
Correlated colour temperature (k)	4000
Light colour	Neutral White
CRI (Ra)	90
Colour Variation Initial (SDCM)	3
Beam Angle (°)	46
Photobiological Risk Group	RG1
Total power consumption (W)	10
Electrical protection	Class II
Control gear type	Electronic ballast

# Concord

## MYRIAD DECO IP65 FLOOD 4000K DALI WHITE WBEZ 2058877

Minimum dimming level (%)	1
Housing colour	White
IP rating	IP65/20
IK rating	IK02
Product EAN number	5025768588770
Warranty	5 years
Dimming method	DALI


### Photometry

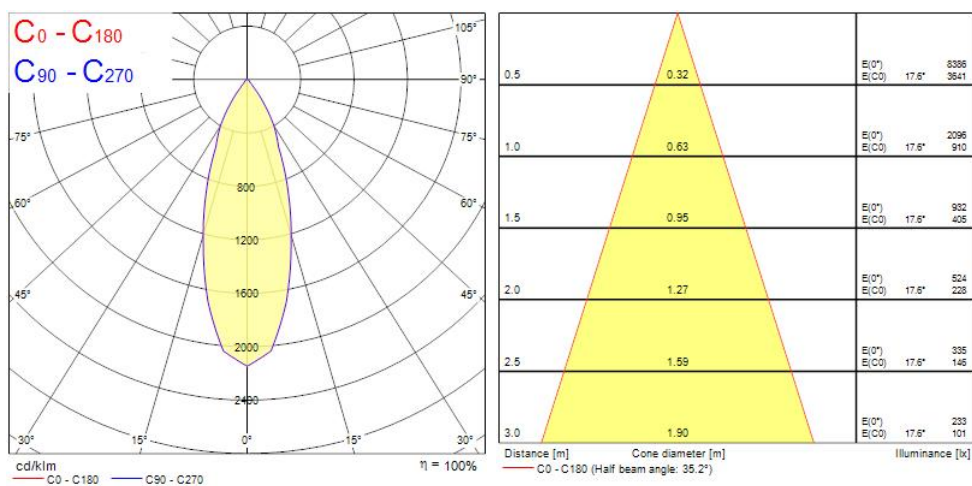

# Concord

## MYRIAD DECO IP65 FLOOD 4000K DALI WHITE WBEZ 2058877

### Technical drawings

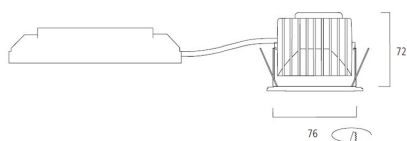

Dimensions (mm)

### Data table

#### GENERAL DATA

<b>Product name</b>	MYRIAD DECO IP65 FLOOD 4000K DALI WHITE WBEZ
<b>Technology</b>	LED
<b>Cap/Base</b>	N/A
<b>Housing</b>	Aluminium
<b>Mount</b>	Ceiling recessed mounting
<b>Environment</b>	Interior
<b>General application</b>	Hospitality, Office, Residential & Consumer, Retail
<b>Performance ambient temperature Tq (°C)</b>	25
<b>ETIM Class</b>	EC001744
<b>Warranty</b>	5 years

#### OPTICAL DATA

<b>Fixture luminous flux (lm)</b>	977
<b>Luminaire efficacy (lm/W)</b>	98

# Concord

## MYRIAD DECO IP65 FLOOD 4000K DALI WHITE WBEZ 2058877

LOR (%)	100
Correlated colour temperature (k)	4000
Light colour	Neutral White
CRI (Ra)	90
Colour Variation Initial (SDCM)	3
Adjustable chromaticity	N
Beam Angle (°)	46
Photobiological Risk Group	RG1

### ELECTRICAL DATA

Total power consumption (W)	10
Primary Supply/Product voltage - min (V)	230
Primary Supply/Product voltage - max (V)	240
Electrical protection	Class II
Control gear required	No
Control gear type	Electronic ballast
Dimming method	DALI
Minimum dimming level (%)	1
Drive current (mA)	250
Energy Efficiency Class (A->G) of contained light source	E
Nominal Frequency (Hz)	50/60Hz

### LIFETIME DATA

Lifespan L70 B50	100000
Lifespan L80 B20	100000
Lifespan L80 B10	100000
Lifespan L90 B10	68500

### PHYSICAL DATA

Housing colour	White
IP rating	IP65/20
IK rating	IK02
Diffuser finish	Bezel (or Ring)

# Concord

## MYRIAD DECO IP65 FLOOD 4000K DALI WHITE WBEZ 2058877

Nominal Product Height (mm)	72
Nominal Product Diameter (mm)	90
Weight (kg)	0.44
Recessed Depth (mm)	72

### PACKAGING

Product EAN number	5025768588770
Packaging single length / height (cm)	17.5
Packaging single width (cm)	15.0
Packaging single depth (cm)	17.5
DUN14 (inner)	05025768588770
Units per outer package	1
Packaging outer length / height (cm)	17.5
Packaging outer width (cm)	15.0
Packaging outer depth (cm)	17.5

### SAFETY DATA

Special purpose lamp	No
Dry applications use only	No
Suitable for household illumination	No