



Insaver HE Topper LED 150

Insaver 150 HE Topper LED NW
3033919



Product features

- Insaver HE Topper is a ceiling recessed LED downlight with cut-out of 145mm. Die-cast aluminium body, Non dimmable LED driver, 8W, 800lm, 100lm/W, 4000K, shallow recessed depth of 55mm.

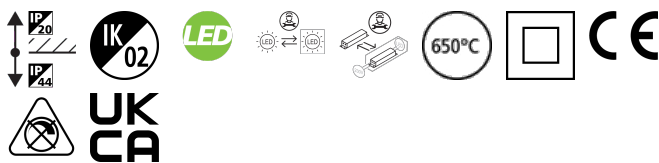


PRODUCT OVERVIEW

Product name	Insaver 150 HE Topper LED NW
Technology	LED
Cap/Base	N/A
Housing	Aluminium
Mount	Ceiling recessed mounting
Environment	External
General application	Hospitality, Logistics & Industry, Office
ETIM Class	EC001744
Warranty	3 years
Useful luminous flux (Fuse)	800
Fixture luminous flux (lm)	800
Luminaire efficacy (lm/W)	100
LOR (%)	100
Correlated colour temperature (k)	4000
Light colour	Neutral White
CRI (Ra)	80
Beam Angle (°)	64
Glare control	< 25
Total power consumption (W)	8
Electrical protection	Class II
Control gear type	Electronic ballast
Dimmable	No
Dimming method	N/A
Housing colour	White
IP rating	IP44/20
IK rating	IK02
Product EAN number	8711971339199

PHOTOMETRY

Insaver HE Topper LED 150 *Insaver 150 HE Topper LED NW* 3033919

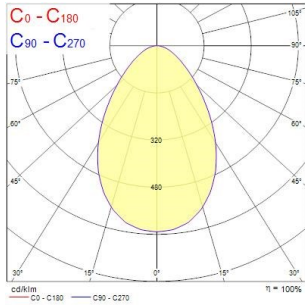

0.5	0.72	E(0°) E(C0)	35.7°	2091 164
1.0	1.44	E(0°) E(C0)	35.7°	618 119
1.5	2.16	E(0°) E(C0)	35.7°	239 62
2.0	2.87	E(0°) E(C0)	35.7°	129 35
2.5	3.59	E(0°) E(C0)	35.7°	62 22
3.0	4.31	E(0°) E(C0)	35.7°	37 15

Distance [m] Cone diameter [m] Illuminance [lx]
 C0 - C180 (Half beam angle: 71.4°)

TECHNICAL DRAWINGS

