






Een volledig, veelzijdig systeem van modulaire containers, perfect geïntegreerd in de SYSTEM huishoudelijke serie en voldoet aan de installatiebehoeften met hoge bescherming van huishoudelijke, commerciële en industriële sectoren. De 27 COMBI serie is beschikbaar in de versie IP40 en in waterdichte versies met beschermingsgraad IP55, IP65 en IP66, aanbevolen voor alle buitentoepassingen onderhevig aan extreme atmosferische omstandigheden.

Omschrijving	1 module	Aant. modules	1
Kleur	Wit RAL 9010	Aant. uitbrekopeningen Ø23	1 aan bodem
Soort uitbrekopeningen	Verwijderbaar met gereedschap	IP waarde	IP40
Isolatie klasse	II	Mechanische weerstand	IK07
Kenmerken	Halogeenvrij	Dekselschroeven	Corrosiebestendig staal
Koppel schroeven aandraaien	0.8 NM	Buitenste afm. LxHxD (mm)	120x82x54
Gloeidraadtest	650 °C	Thermodruk met kogel	70 °C
Standaard	EN 50085-2-1	Installatie temperatuur	-5 +60 °C
Electrocod	0212		

BEHAVIOUR WITH CHEMICAL AND ATMOSPHERIC AGENTS

Saline solution	Acids		Bases		Solvents				Mineral oil	UV rays
	Concentrated	Diluted	Concentrated	Diluted	Hexane	Benzol	Acetone	Alcohol		
Resistant	Limited resistance	Resistant	Resistant	Resistant	Limited resistance	Not resistant	Not resistant	Not resistant	Limited resistance	Resistant

DIMENSIONAL

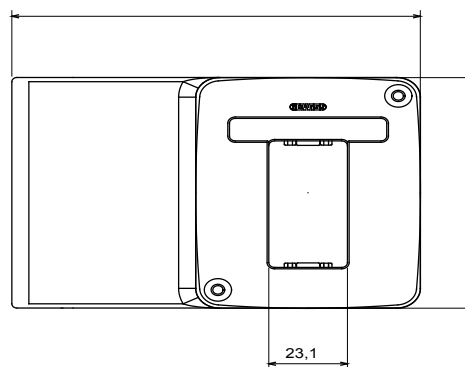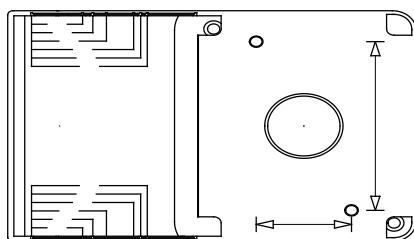

TECHNICAL SYMBOLOGY




IP
IP40



IK
IK07



GWT
650 °C



STANDARDS/APPROVALS

