

Features

- START Panel is a range of backlit LED panels used in recessed ceilings. Ideal for general indoor applications such as corridors, breakrooms, offices and meeting rooms. Luminaire dimensions are compatible with common ceiling installation, and the shallow design makes it easy to install in low ceilings. 3600Lm; 36W; 100Lm/W; Drive current: 750mA; Average lifespan: 100.000Hrs; 4000K; CRI 80; Glare control <19; IK03; IP40 (from the front); SDCM<3; Class II; Loop in loop out connector for quick installation.

Product Overview


Product name	START Panel UGR19 600x600 3600Lm 840 LILO
Technology	LED
Housing	Aluminium, Steel
Mount	Ceiling recessed mounting
General application	Education, Office
ETIM Class	EC002892
E-number FI	4278355
Fixture luminous flux (lm)	3600
Luminaire efficacy (lm/W)	100
Correlated colour temperature (k)	4000
Light colour	Neutral White
CRI (Ra)	80
Colour Variation Initial (SDCM)	3
Beam Angle (°)	90
Glare control	< 19
Photobiological Risk Group	RG0
Total power consumption (W)	36
Electrical protection	Class II
Control gear type	LED driver constant current

Light your world

START Panel UGR19 600x600 3600Lm 840 LILO 0042184

LED Flickering Rate	Ultra low (5% or less)
Housing colour	RAL9003
IP rating	IP40/20
IK rating	IK03
Product EAN number	5410288421841
Warranty	5 years
Dimming method	N/A
Useful luminous flux (#use)	3600

Photometry

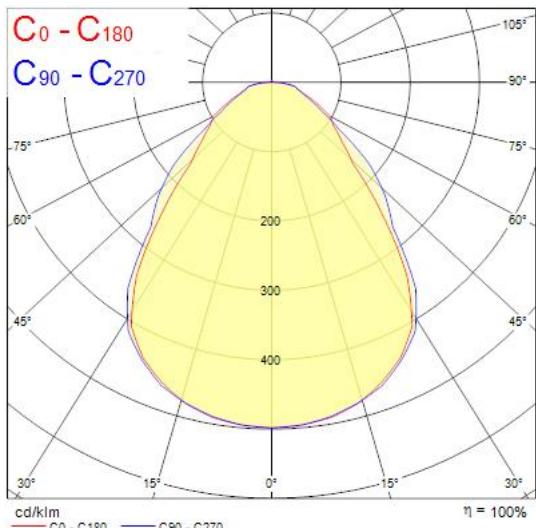

Technical drawings

