

Features

- A round (4000K) neutral white LED downlight with phase dimmable driver, finished in a white finish , Colour rendering index Ra >80, , Class II, Protection rating IP65/IK02

Product Overview

| | |
|-----------------------------------|-------------------------------------|
| Product name | Insaver 75 LED RS NW DB WH |
| Technology | LED |
| Housing | Aluminium |
| Mount | Ceiling recessed mounting |
| Environment | External (remote) |
| General application | Hospitality, Residential & Consumer |
| ETIM Class | EC001744 |
| E-number FI | 4271172 |
| E-number SE | 7467429 |
| Fixture luminous flux (lm) | 1200 |
| Luminaire efficacy (lm/W) | 75 |
| Correlated colour temperature (k) | 4000 |
| CRI (Ra) | 80 |
| Colour Variation Initial (SDCM) | 5 |
| Beam Angle (°) | 55 |
| Photobiological Risk Group | RG1 |
| Total power consumption (W) | 16 |
| Electrical protection | Class II |
| Control gear type | LED driver constant current |
| Housing colour | White |
| IP rating | IP65/20 |
| IK rating | IK02 |

Insaver 75 LED RS NW DB WH 3097101


Product EAN number

8711971971016

Warranty

3 years

Photometry

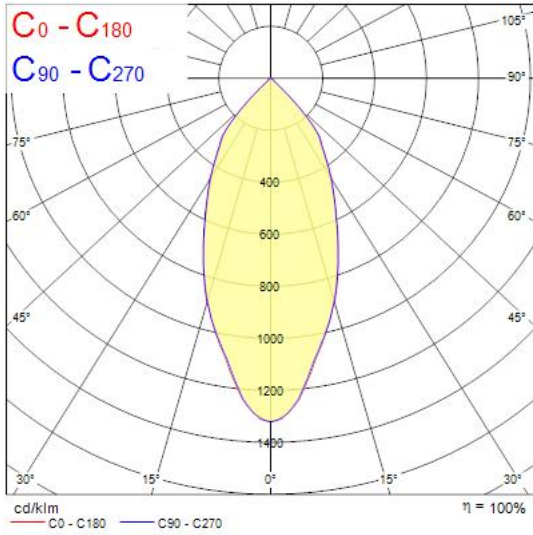

Technical drawings

