

TRONIX



600-048 & 600-049
4-wire 3 circuits

LED Track Mounting Emergency Light



RoHS




INTRODUCTION

Classic and sleek emergency downlight for track mounting, 4-wire 3 circuits track adaptor for AT/ MT. 6-wire 3 circuits tack adaptor for DALI

FEATURES

- Simple & buckle design, convenient installation
- Round/oval lens interchangeable: round lens for open areas, oval lens for corridors
- Manual test/ Auto test(low maintenance)
- DALI/CBS is available
- LiFePO4 battery(high performance)

DIMENSION: mm

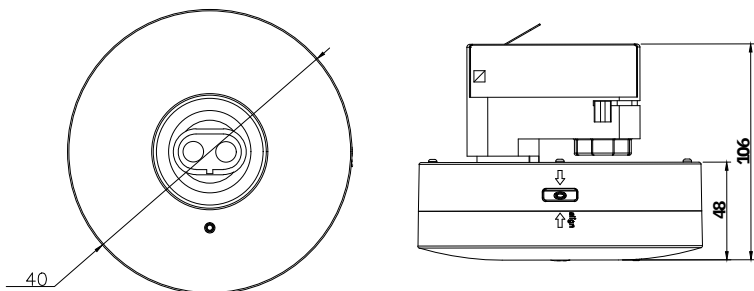

GENERAL

Voltage	200-240VAC, 50/60Hz
Lumen Output	240lm/ 450lm
Mains Power	3.5W/ 6W Max
Emergency Power	2W/ 4W Max
Battery	LiFePO4 6.4V 1500mAh/ LiFePO4 9.6V 1500mAh
Charge Time	≥24H
Discharge Duration	≥3H
CCT/ CRI	4000K or 5000K/ Ra>70
Test Mode	AT / MT / DALI
Protection Class	Class II
IP Rating	IP20

STRUCTURE

Material	PC
Operating Temp (°C)	0°C~45°C
Mounting Type	Track Mount

Remarks

INSTALLATION

