

## LED IP20 BATTEN L1200 SINGLE 4000K 0045159



### Features

- full range of LED Battens to replace traditional T8 battens (600mm, 1200mm, 1500mm and 1800mm), ease of installation, 16W, 1920 lum, 4000K, 25000h lifetime




### Product Overview


Product name	LED IP20 BATTEN L1200 SINGLE 4000K
Technology	LED
Cap/Base	N/A
Housing	PC Polycarbonate
Fixture luminous flux (lm)	1920
Luminaire efficacy (lm/W)	120
Colour temperature (K)	4000
Light colour	Neutral White
CRI (Ra)	80
Photobiological Risk Group	RG0
Total power consumption (W)	16
Electrical protection	Class I
Control gear type	LED driver constant current
Housing colour	White
IP rating	IP20
IK rating	IK02
Product EAN number	5410288451596
Warranty	2 years

## LED IP20 BATTEN L1200 SINGLE 4000K 0045159

### Photometry

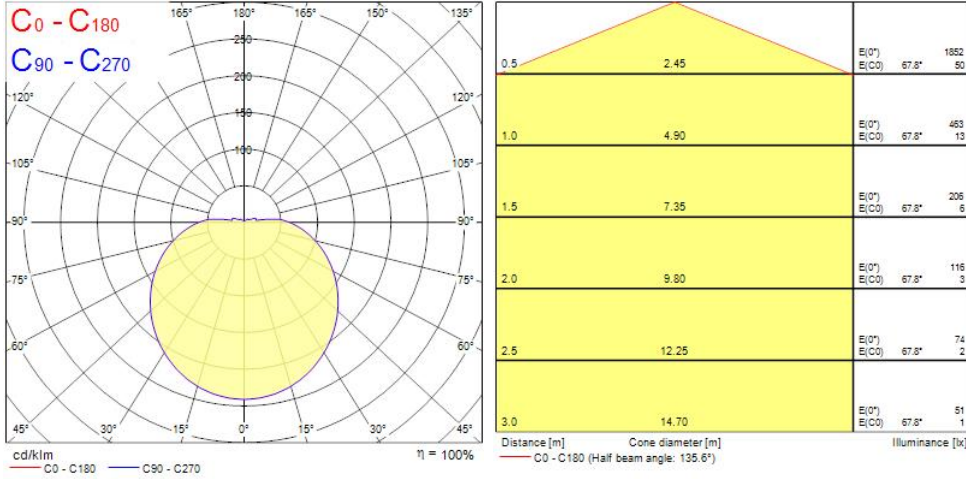

### Technical drawings

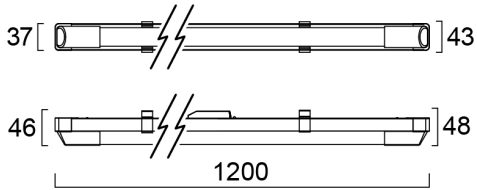

### Data table

#### GENERAL DATA

Product name

LED IP20 BATTEN L1200 SINGLE 4000K

## LED IP20 BATTEN L1200 SINGLE 4000K 0045159

Technology	LED
Cap/Base	N/A
Housing	PC Polycarbonate
Performance ambient temperature Tq (°C)	25
Warranty	2 years

### OPTICAL DATA

Fixture luminous flux (lm)	1920
Luminaire efficacy (lm/W)	120
Colour temperature (K)	4000
Light colour	Neutral White
CRI (Ra)	80
Photobiological Risk Group	RG0

### ELECTRICAL DATA

Total power consumption (W)	16
Primary Supply/Product voltage - min (V)	220
Electrical protection	Class I
Control gear required	No
Control gear type	LED driver constant current
Drive current (mA)	120
Glow Wire Test (°C)	650
Energy Efficiency Class (A->G) of contained light source	D, C(more than 1 Light Source)
Nominal Frequency (Hz)	50/60Hz
Max. products per 10A C Breaker	27
Max. products per 20A B Breaker	36
Connectable conductor cross section - Max (mm <sup>2</sup> )	1.5

### LIFETIME DATA

Lifespan L70 B50	25000
------------------	-------

## LED IP20 BATTEN L1200 SINGLE 4000K 0045159

### PHYSICAL DATA

Housing colour	White
IP rating	IP20
IK rating	IK02
Nominal Product Length (mm)	1200
Nominal Product Width (mm)	43
Weight (kg)	0.39

### PACKAGING

Single packaging type	Mix blister(20% carton, 80% pl
Product EAN number	5410288451596
Packaging single width (cm)	4.25
Packaging single depth (cm)	4.72
DUN14 (outer)	15410288451593
Packaging outer length / height (cm)	122.0

### SAFETY DATA

Special purpose lamp	No
Dry applications use only	No
Suitable for household illumination	No