


# Concord

## MYRIAD IP65 4000K PHASE DIM WHITE 2049529



### Features

- MYRIAD IP65 4000K PHASE DIM WHITE



### Product Overview


Product name	MYRIAD IP65 4000K PHASE DIM WHITE
Technology	LED
Cap/Base	N/A
Mount	Ceiling recessed mounting
Environment	Interior
General application	Hospitality, Office, Retail
ETIM Class	EC001744
E-number SE	7462014
E-number Norway	3290237
Fixture luminous flux (lm)	1050
Luminaire efficacy (lm/W)	105
LOR (%)	100
Correlated colour temperature (k)	4000
Light colour	Neutral White
CRI (Ra)	90
Colour Variation Initial (SDCM)	3
Beam Angle (°)	30
Photobiological Risk Group	RG1
Total power consumption (W)	10
Electrical protection	Class II

# Concord

## MYRIAD IP65 4000K PHASE DIM WHITE 2049529

Control gear type	LED driver constant current
Control gear mounting	Integral
IP rating	IP65/20
IK rating	IK02
Product EAN number	5025768495290
Warranty	5 years
Dimming method	Mains: leading / trailing edge


### Photometry

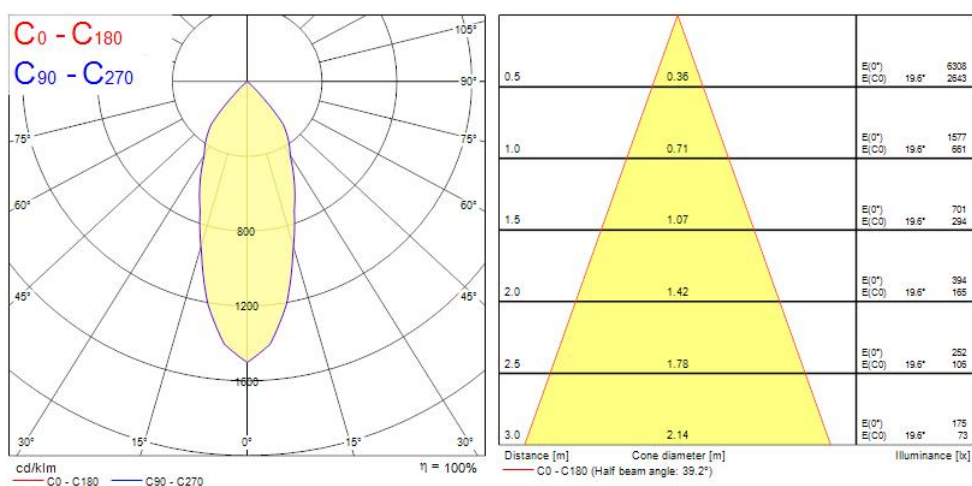

# Concord

## MYRIAD IP65 4000K PHASE DIM WHITE 2049529

### Technical drawings

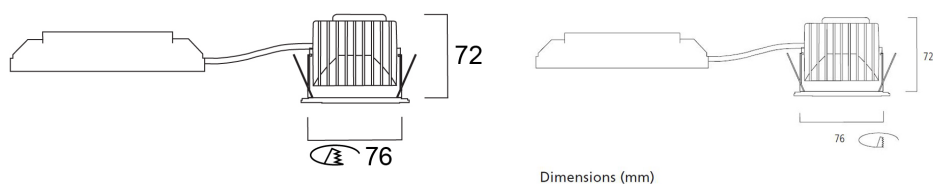

### Data table

#### GENERAL DATA

Product name	MYRIAD IP65 4000K PHASE DIM WHITE
Technology	LED
Cap/Base	N/A
Mount	Ceiling recessed mounting
Environment	Interior
General application	Hospitality, Office, Retail
ETIM Class	EC001744
E-number SE	7462014
E-number Norway	3290237
Warranty	5 years

#### OPTICAL DATA

Fixture luminous flux (lm)	1050
Luminaire efficacy (lm/W)	105
LOR (%)	100
Correlated colour temperature (k)	4000

# Concord

## MYRIAD IP65 4000K PHASE DIM WHITE 2049529

Light colour	Neutral White
CRI (Ra)	90
Colour Variation Initial (SDCM)	3
Adjustable chromaticity	N
Beam Angle (°)	30
Distribution type	Symmetric
Photobiological Risk Group	RG1

### ELECTRICAL DATA

Total power consumption (W)	10
Primary Supply/Product voltage - min (V)	220
Primary Supply/Product voltage - max (V)	240
Electrical protection	Class II
Control gear required	No
Control gear type	LED driver constant current
Control gear mounting	Integral
Dimming method	Mains: leading / trailing edge
Drive current (mA)	250
Energy Efficiency Class (A->G) of contained light source	E
Nominal Frequency (Hz)	50/60Hz

### LIFETIME DATA

Lifespan L70 B50	100000
Lifespan L80 B20	100000
Lifespan L90 B10	68500

### PHYSICAL DATA

IP rating	IP65/20
IK rating	IK02
Diffuser material	Glass
Nominal Product Height (mm)	72
Nominal Product Diameter (mm)	76
Weight (kg)	0.39

# Concord

## MYRIAD IP65 4000K PHASE DIM WHITE 2049529

Recessed Depth (mm)	72
---------------------	----

### PACKAGING

Product EAN number	5025768495290
--------------------	---------------

Packaging single length / height (cm)	17.5
---------------------------------------	------

Packaging single width (cm)	15.0
-----------------------------	------

Packaging single depth (cm)	17.5
-----------------------------	------

Units per outer package	1
-------------------------	---

Packaging outer length / height (cm)	17.5
--------------------------------------	------

Packaging outer width (cm)	15.0
----------------------------	------

Packaging outer depth (cm)	17.5
----------------------------	------

### SAFETY DATA

Special purpose lamp	No
----------------------	----

Dry applications use only	No
---------------------------	----

Suitable for household illumination	No
-------------------------------------	----