


Concord

CONCORD BEACON 4000K MEDIUM O/B DIM BLACK 2062465

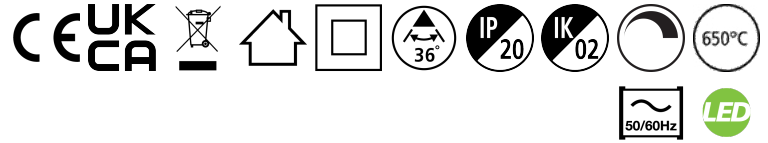

Features

- Simple and slick integral design with no driver box and without any visible screws

New technology utilization for improved performance

Invisible in-track adaptor for an impressive architectural look

Extremely precise light beams due to the high-quality lenses

#80mm die-cast aluminium body, Fix beam angle: 36° , Textured black finishing colour

Light color temperature: 4000K, natural light

System power: 18W, Fixture lumen output: 1675lm, efficacy: 93lm/W, Ra97 typical, LED chromacity: 2 step MacAdam ellipse LED source (SDCM2), IR/UV free light source without heat radiation

Operating voltage 220-240V / 50-60Hz, dimmable via on-board potentiometer, Suitable for installation on 3-circuit tracks, please check compatibility list on the instruction sheet. Compatible with OneTrack

Electrical protection: Class II. Degree of protection: IP20, suitable for indoor environment only

Horizontal rotation: 355°, vertical tilt: 90°

Nominal product dimensions: D.80mmx200mm

5 years warranty. Suitable for track mounting

Product Overview


| | |
|----------------------------|---|
| Product name | CONCORD BEACON 4000K MEDIUM O/B DIM BLACK |
| Technology | LED |
| Cap/Base | N/A |
| Housing | Aluminium |
| Mount | Track mounting |
| Fixture rating | Enclosed |
| General application | Museums & Galleries, Retail, Hospitality |
| ETIM Class | EC001744 |
| Fixture luminous flux (lm) | 1675 |

Concord

CONCORD BEACON 4000K MEDIUM O/B DIM BLACK 2062465

| | |
|-----------------------------------|-----------------------------|
| Luminaire efficacy (lm/W) | 93 |
| LOR (%) | 100 |
| Correlated colour temperature (k) | 4000 |
| Light colour | Neutral White |
| CRI (Ra) | 97 |
| Colour Variation Initial (SDCM) | 2 |
| Beam Angle (°) | 36 |
| Photobiological Risk Group | RG1 |
| Total power consumption (W) | 18 |
| Electrical protection | Class II |
| Control gear type | LED driver constant current |
| Dimmable | Yes |
| Minimum dimming level (%) | 1 |
| Housing colour | RAL9005 |
| IP rating | IP20 |
| IK rating | IK02 |
| Product EAN number | 5025768624652 |
| Warranty | 5 years |
| Dimming method | Onboard pot |
| Useful luminous flux (#use) | 1625 |

Photometry

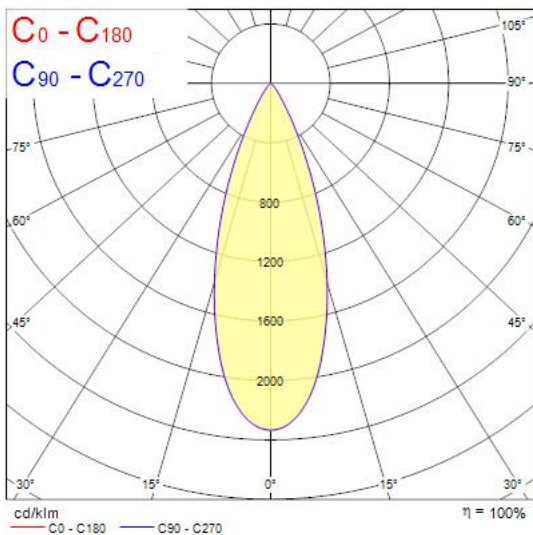

Technical drawings

