


INSET TREND KIT SW REFLED ES50 36° BN WW DIM 3001762

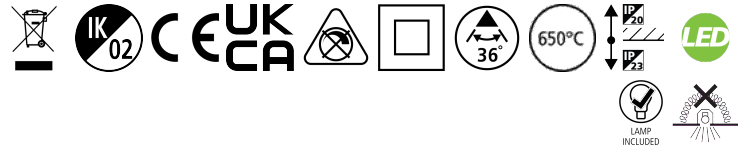

Features

- GU10 Housing with REFLED ES50 36° lamp included, Ideal for indoor application, Loop in - loop out box included


Product Overview

Product name	INSET TREND KIT SW REFLED ES50 36° BN WW DIM
Technology	LED
Cap/Base	GU10
Housing	Aluminium
Mount	Ceiling recessed mounting
Light source included	0029126
Environment	Indoor
General application	Hospitality, Residential & Consumer
ETIM Class	EC001744
E-number FI	4271313
E-number SE	7467393
Fixture luminous flux (lm)	345
Luminaire efficacy (lm/W)	76
LOR (%)	100
Correlated colour temperature (k)	3000
Light colour	Warm White
CRI (Ra)	80
Colour Variation Initial (SDCM)	6
Beam Angle (°)	36

INSET TREND KIT SW REFLED ES50 36° BN WW DIM 3001762

Photobiological Risk Group	RG1
Total power consumption (W)	4.5
Electrical protection	Class II
Control gear type	LED driver constant current
Dimmable	No
Housing colour	White
IP rating	IP23/20
IK rating	IK02
Product EAN number	8711971017622
Warranty	3 years
Dimming method	Mains: leading / trailing edge

Technical drawings

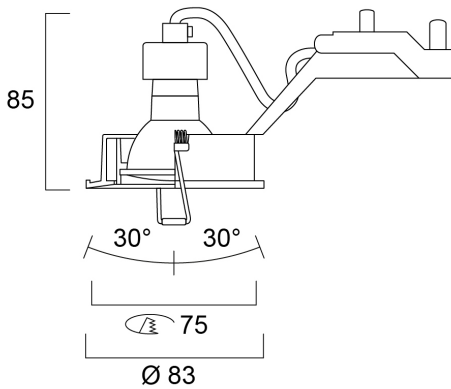

Data table

GENERAL DATA

Product name	INSET TREND KIT SW REFLED ES50 36° BN WW DIM
Technology	LED
Cap/Base	GU10
Housing	Aluminium

INSET TREND KIT SW REFLED ES50 36° BN WW DIM 3001762

Mount	Ceiling recessed mounting
Environment	Indoor
General application	Hospitality, Residential & Consumer
ETIM Class	EC001744
E-number FI	4271313
E-number SE	7467393
Warranty	3 years

OPTICAL DATA

Fixture luminous flux (lm)	345
Luminaire efficacy (lm/W)	76
LOR (%)	100
Correlated colour temperature (k)	3000
Light colour	Warm White
CRI (Ra)	80
Colour Variation Initial (SDCM)	6
Adjustable chromaticity	N
Beam Angle (°)	36
Distribution type	Symmetric
Photobiological Risk Group	RG1

ELECTRICAL DATA

Light source included	0029126
Total power consumption (W)	4.5
Primary Supply/Product voltage - min (V)	220
Primary Supply/Product voltage - max (V)	240
Electrical protection	Class II
Control gear required	No
Control gear type	LED driver constant current
Dimmable	No
Dimming method	Mains: leading / trailing edge
Energy Efficiency Class (A->G) of contained light source	F

INSET TREND KIT SW REFLED ES50 36° BN WW DIM 3001762

Connectable conductor cross section - Min (mm ²)	0.75
---	------

Connectable conductor cross section - Max (mm ²)	2.0
---	-----

PHYSICAL DATA

Housing colour	White
----------------	-------

IP rating	IP23/20
-----------	---------

IK rating	IK02
-----------	------

Diffuser finish	Other
-----------------	-------

Diffuser material	None
-------------------	------

Reflector finish	Not Applicable
------------------	----------------

Nominal Product Height (mm)	85
-----------------------------	----

Nominal Product Diameter (mm)	83
-------------------------------	----

Weight (kg)	0.179
-------------	-------

Recessed Depth (mm)	100
---------------------	-----

PACKAGING

Product EAN number	8711971017622
--------------------	---------------

Packaging single length / height (cm)	13.13
---------------------------------------	-------

Packaging single width (cm)	9.9
-----------------------------	-----

Packaging single depth (cm)	8.4
-----------------------------	-----

DUN14 (inner)	18711971017629
---------------	----------------

Units per outer package	30
-------------------------	----

Packaging outer length / height (cm)	28.5
--------------------------------------	------

Packaging outer width (cm)	28.7
----------------------------	------

Packaging outer depth (cm)	53.0
----------------------------	------

SAFETY DATA

Glow Wire Test (°C)	650
---------------------	-----

Special purpose lamp	No
----------------------	----

Dry applications use only	No
---------------------------	----

Suitable for household illumination	No
-------------------------------------	----

SYLVANIA

INSET TREND KIT SW REFLED ES50 36° BN WW DIM
3001762



Light your world