


# Concord

## Rocks IP65 20KLM 840 WIDE DALI EM 2825460

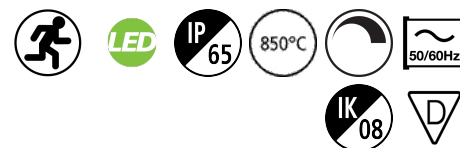

### Features

- Logistics and Industry high bay luminaire with Symmetrical Wide beam optics to provide homogenous light distribution for open space areas, comes complete with 2000mm flying lead and 1000mm suspension cable, aluminium housing, PC diffuser, IP65, IK08, Class I, 4000K, CRI80, 3 step MacAdam ellipse, DALI dimmable, Integrated 3hrs Self Test Emergency LiFePO4 unit, 21200lm, 114W, 186lm/W, 105.000hrs L80B50 lifespan, 446 x 481 x 128mm (LxWxD) dimensions, 4.86kg weight, RAL7012 Basalt Grey color, 0...+40°C operating temperature range. Ball-impact-resistance according to DIN57710-13 VDE 0710 13/5.81, DIN 18032-3.

### Product Overview

|                                   |                                   |
|-----------------------------------|-----------------------------------|
| Product name                      | Rocks IP65 20KLM 840 WIDE DALI EM |
| Technology                        | LED                               |
| Cap/Base                          | N/A                               |
| Housing                           | Aluminium                         |
| Mount                             | Suspended                         |
| General application               | Logistics & Industry              |
| ETIM Class                        | EC001716                          |
| Fixture luminous flux (lm)        | 21200                             |
| Luminaire efficacy (lm/W)         | 186                               |
| Correlated colour temperature (k) | 4000                              |
| Light colour                      | Neutral White                     |
| CRI (Ra)                          | 80                                |
| Colour Consistency (SDCM)         | 3                                 |
| Colour Variation Initial (SDCM)   | 3                                 |
| Beam Angle (°)                    | 75                                |
| Glare control                     | < 19                              |

# Concord

## Rocks IP65 20KLM 840 WIDE DALI EM 2825460

|                                |                             |
|--------------------------------|-----------------------------|
| Photobiological Risk Group     | RG1                         |
| Luminous flux (emergency) (lm) | 830                         |
| Total power consumption (W)    | 114                         |
| Electrical protection          | Class I                     |
| Control gear type              | LED driver constant current |
| Dimmable                       | Yes                         |
| Housing colour                 | Grey                        |
| IP rating                      | IP65                        |
| IK rating                      | IK08                        |
| Product EAN number             | 5025768254606               |
| Warranty                       | 5 years                     |
| Built in presence detector     | NONE                        |
| Dimming method                 | DALI-2                      |

### Photometry

### Technical drawings