


IP20 LED Batten - Twin

LED IP20 BATTEN L1500 TWIN 4000K
0045164

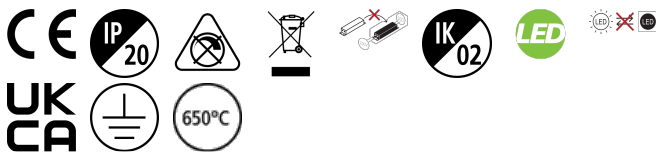

PRODUCT OVERVIEW


| | |
|-----------------------------|----------------------------------|
| Product name | LED IP20 BATTEN L1500 TWIN 4000K |
| Technology | LED |
| Cap/Base | N/A |
| Housing | PC Polycarbonate |
| Warranty | 2 years |
| Fixture luminous flux (lm) | 4100 |
| Luminaire efficacy (lm/W) | 114 |
| Colour temperature (K) | 4000 |
| Light colour | Neutral White |
| CRI (Ra) | 80 |
| Photobiological Risk Group | RG0 |
| Total power consumption (W) | 36 |
| Electrical protection | Class I |
| Control gear type | LED driver constant current |
| Housing colour | White |
| IP rating | IP20 |
| IK rating | IK02 |
| Product EAN number | 5410288451640 |

PHOTOMETRY

| Distance [m] | Cone diameter [m] | E ₀ [lx] | E ₁₀ [lx] | E ₃₀ [lx] |
|--------------|-------------------|---------------------|----------------------|----------------------|
| 0.5 | 2.06 | 807 | 84.1* | 400 |
| 1.0 | 4.12 | 202 | 84.1* | 100 |
| 1.5 | 6.18 | 80.7 | 84.1* | 40 |
| 2.0 | 8.24 | 40.3 | 84.1* | 15 |
| 2.5 | 10.30 | 24.2 | 84.1* | 7 |
| 3.0 | 12.36 | 16.1 | 84.1* | 5 |

Distance [m] Cone diameter [m] Illuminance [lx]

— C0 - C180 (Half beam angle: 128.2°)



IP20 LED Batten - Twin *LED IP20 BATTEN L 1500 TWIN 4000K* 0045164

TECHNICAL DRAWINGS

