


# Walraven VibraTek® SB-MM Silentblock

(L20560)

a rubber silentblock with two external threads

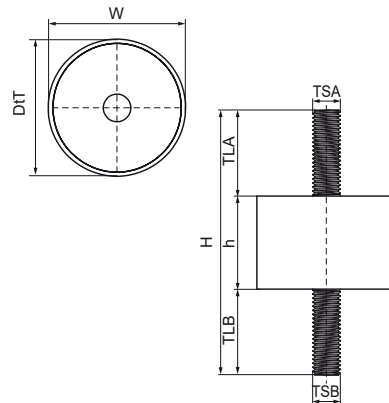

## Features & benefits

- a universal rubber absorber, ideal for use with all kinds of elastic suspension or mounting of equipment
- ideal for use with machinery and equipment mounted on metallic surface
- with two male threads
- for use in compression only
- working temperature range -30 °C till 80 °C

| Product Number   | Thread Size A | Thread Size B | Thread Length A | Thread Length B | Total Height | Total Width | Total Depth | Height | Maximum Allowed Load Faz |
|------------------|---------------|---------------|-----------------|-----------------|--------------|-------------|-------------|--------|--------------------------|
| Reference Letter | TSA           | TSB           | TLA             | TLB             | H            | W           | DtT         | h      | F <sub>0,z</sub>         |
| Unit description |               |               | mm              | mm              | mm           | mm          | mm          | mm     | N                        |
| 2801400420       | M8            | M8            | 23              | 23              | 71           | 30          | 30          | 25     | 420                      |
| 2801400750       | M8            | M8            | 23              | 23              | 86           | 40          | 40          | 40     | 750                      |
| 2801401170       | M10           | M10           | 28              | 28              | 96           | 50          | 50          | 40     | 1,170                    |
| 2801401690       | M12           | M12           | 37              | 37              | 114          | 60          | 60          | 40     | 1,690                    |
| 2801400181       | M8            | M8            | 23              | 23              | 66           | 20          | 20          | 20     | 180                      |
| 2801400291       | M8            | M8            | 23              | 23              | 66           | 25          | 25          | 20     | 290                      |
| 2801400550       | M8            | M8            | 23              | 23              | 76           | 40          | 40          | 30     | 550                      |