

### Features

- A round (4000K) neutral white LED downlight with phase dimmable driver, finished in a white finish , Colour rendering index Ra >80, , Class II, Protection rating IP65/IK02


### Product Overview

Product name	Insaver 75 LED RS NW DB WH
Technology	LED
Housing	Aluminium
Mount	Ceiling recessed mounting
Environment	External (remote)
E-number FI	4271172
E-number SE	7467429
Fixture luminous flux (lm)	1200
Luminaire efficacy (lm/W)	75
Colour temperature (K)	4000
CRI (Ra)	80
Colour Variation Initial (SDCM)	5
Photobiological Risk Group	RG1
Total power consumption (W)	16
Electrical protection	Class II
Control gear type	LED driver constant current
Housing colour	White
IP rating	IP65/20
IK rating	IK02
Product EAN number	8711971971016
Warranty	3 years


# Lumiance

Insaver 75 LED RS NW DB WH  
3097101

## Photometry

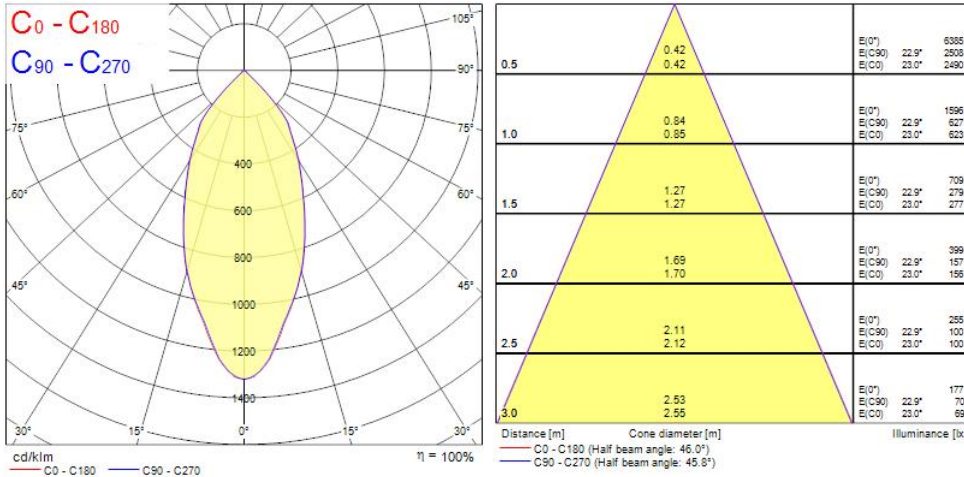

## Technical drawings

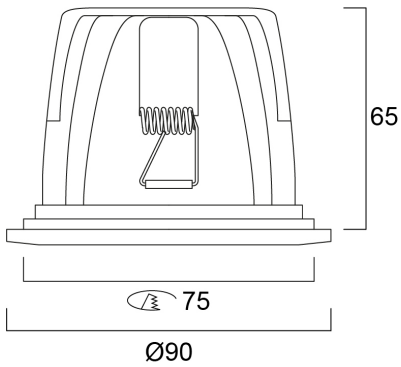

## Data table

### GENERAL DATA

Product name

Insaver 75 LED RS NW DB WH

## Insaver 75 LED RS NW DB WH 3097101

Technology	LED
Housing	Aluminium
Mount	Ceiling recessed mounting
Environment	External (remote)
E-number FI	4271172
E-number SE	7467429
Warranty	3 years

### OPTICAL DATA

Fixture luminous flux (lm)	1200
Luminaire efficacy (lm/W)	75
Colour temperature (K)	4000
CRI (Ra)	80
Colour Variation Initial (SDCM)	5
Adjustable chromaticity	N
Photobiological Risk Group	RG1

### ELECTRICAL DATA

Total power consumption (W)	16
Electrical protection	Class II
Control gear required	No
Control gear type	LED driver constant current
Drive current (mA)	350
Energy Efficiency Class (A->G) of contained light source	F

### PHYSICAL DATA

Housing colour	White
IP rating	IP65/20
IK rating	IK02
Diffuser finish	Transparent
Diffuser material	Glass
Nominal Product Diameter (mm)	90
Weight (kg)	0.441

## PACKAGING

---

Single packaging type	Carton
Product EAN number	8711971971016
Packaging single width (cm)	8.5
Packaging single depth (cm)	14.9
DUN14 (outer)	18711971971013
Packaging outer length / height (cm)	46.4

## SAFETY DATA

---

Special purpose lamp	No
Dry applications use only	No
Suitable for household illumination	No