

Concord

MC2 D/I KIT 2.4M 4K DALI WHT PRIS 2071464

650°C



Features

- MC2-KIT D/I 2.4M 4K DALI WHT PRIS LED luminaire, white RAL9016 finishing, direct/indirect distribution (65/35), suspended kit version is pre-wired and supplied complete with end caps and suspension cables, compact and minimalist design based on the Golden Mean, ideal for offices, meeting rooms, corridors, education facilities, museums and libraries, extruded aluminium body, diffuser: micro prismatic, colour temperature: 4000K neutral white, total system power: 58W, total fixture output: 7700lm, luminaire efficacy: 133lm/W, LOR: 100%, colour rendering: Ra >80, LED Chromacity: 3 step MacAdam ellipse, lifespan: 66,000 hours L90B10, IR/UV free light source without heat radiation, operating voltage: 220-240V / 50-60Hz, drive current: (Direct) 800mA + (Indirect) 350mA, electronic driver, DALI dimmable, direct/indirect independently addressable, electrical protection: CLASS I, IP20, suitable for internal environment only.

Product Overview


Product name	MC2 D/I KIT 2.4M 4K DALI WHT PRIS
Technology	LED
Cap/Base	N/A
Housing	Aluminium
Mount	Suspended
General application	Education, Hospitality, Office, Retail
ETIM Class	EC001743
E-number FI	4170305
Fixture luminous flux (lm)	7700
Luminaire efficacy (lm/W)	133
LOR (%)	100
Correlated colour temperature (k)	4000
Light colour	Neutral White

Concord

MC2 D/I KIT 2.4M 4K DALI WHT PRIS 2071464

CRI (Ra)	80
Colour Variation Initial (SDCM)	3
Glare control	< 19
Photobiological Risk Group	RG0
Total power consumption (W)	58
Electrical protection	Class I
Control gear type	Electronic ballast
Dimmable	Yes
Minimum dimming level (%)	1
Housing colour	White
IP rating	IP20
IK rating	IK03
Product EAN number	5025768714643
Warranty	5 years
Built in presence detector	NONE
Virtual assistant compatibility	N/A
Dimming method	DALI

Photometry

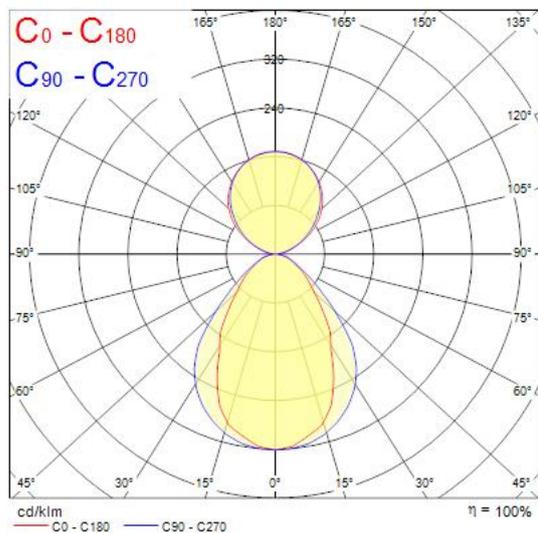

Technical drawings

