


Concord

BEACON XL 85CRI 4K WIDE BEAM L3 WHITE 2059723

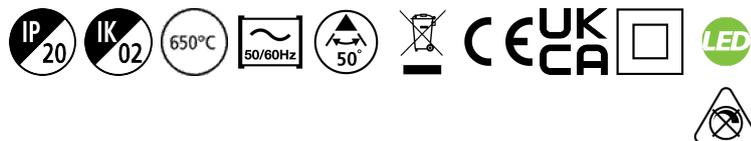

Features

- Integrated LED spotlight, white RAL 9016, compact and minimalist design, ideal for retail and display applications, die-cast aluminium body, passive cooling heatsink, beam angle: 50° wide beam, optics: Polycarbonate lens, colour temperature: 4000K neutral white, total system power: 33W, total fixture output: 3550lm, luminaire efficacy: 108lm/W, LOR: 100%, colour rendering: Ra 85 typical, LED Chromacity: 3 step MacAdam ellipse, IR/UV free light source without heat radiation, operating voltage: 220-240V / 50-60Hz, drive current: 800mA, electronic driver, non-dimmable, power factor: 0.9 electrical protection: CLASS II, 3-circuit track adaptor, suitable for Concord Lytespan 3 track, ingress protection rating: IP20, suitable for internal environment only, horizontal rotation: 355°, vertical tilt: 90°, dimensions: Ø113x165x205mm, weight: 1.66kg.

Product Overview


Product name	BEACON XL 85CRI 4K WIDE BEAM L3 WHITE
Technology	LED
Cap/Base	N/A
Housing	Aluminium
Mount	Track mounting
Environment	Internal
General application	Museums & Galleries, Retail
ETIM Class	EC001744
E-number FI	4280883
E-number SE	7401264
Fixture luminous flux (lm)	3550
Luminaire efficacy (lm/W)	108
LOR (%)	100

Concord

BEACON XL 85CRI 4K WIDE BEAM L3 WHITE 2059723

Correlated colour temperature (k)	4000
Light colour	Neutral White
CRI (Ra)	85
Colour Consistency (SDCM)	3
Beam Angle (°)	50
Photobiological Risk Group	RG1
Total power consumption (W)	33
Electrical protection	Class II
Control gear type	Electronic ballast
Dimmable	No
Housing colour	White
IP rating	IP20
IK rating	IK02
Product EAN number	5025768597239
Warranty	5 years
Dimming method	N/A


Photometry

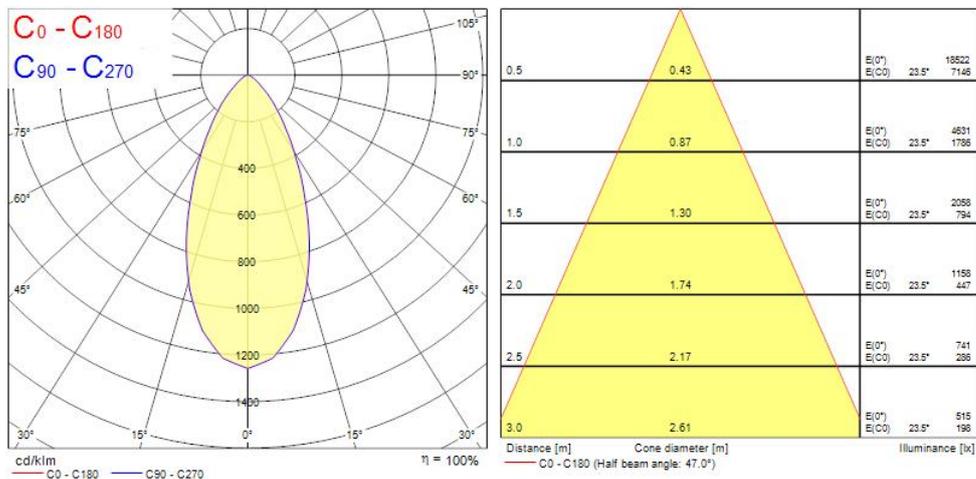

Concord

BEACON XL 85CRI 4K WIDE BEAM L3 WHITE 2059723

Technical drawings

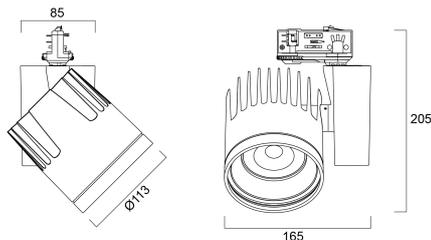

Data table

GENERAL DATA

Product name	BEACON XL 85CRI 4K WIDE BEAM L3 WHITE
Technology	LED
Cap/Base	N/A
Housing	Aluminium
Mount	Track mounting
Environment	Internal
General application	Museums & Galleries, Retail
Performance ambient temperature Tq (°C)	25
ETIM Class	EC001744
E-number FI	4280883
E-number SE	7401264
Warranty	5 years

OPTICAL DATA

Fixture luminous flux (lm)	3550
----------------------------	------

Concord

BEACON XL 85CRI 4K WIDE BEAM L3 WHITE 2059723

Luminaire efficacy (lm/W)	108
LOR (%)	100
Correlated colour temperature (k)	4000
Light colour	Neutral White
CRI (Ra)	85
Colour Consistency (SDCM)	3
Adjustable chromaticity	N
Beam Angle (°)	50
Photobiological Risk Group	RG1

ELECTRICAL DATA

Total power consumption (W)	33
Primary Supply/Product voltage - min (V)	220.0
Primary Supply/Product voltage - max (V)	240.0
Lamp power factor	0.9
Electrical protection	Class II
Control gear required	No
Control gear type	Electronic ballast
Dimmable	No
Dimming method	N/A
Drive current (mA)	800
Inrush Current (A)	30
Inrush Duration (µs)	200
Energy Efficiency Class (A->G) of contained light source	D
Nominal Frequency (Hz)	50/60Hz
Max. products per 10A C Breaker	12
Max. products per 16A C Breaker	20
Max. products per 10A B Breaker	12
Max. products per 16A B Breaker	20

LIFETIME DATA

Lifespan L70 B50	72000
Lifespan L80 B20	72000

Concord

BEACON XL 85CRI 4K WIDE BEAM L3 WHITE 2059723

Lifespan L90 B10	33000
------------------	-------

PHYSICAL DATA

Housing colour	White
IP rating	IP20
IK rating	IK02
Nominal Product Length (mm)	85
Nominal Product Width (mm)	165
Nominal Product Height (mm)	205
Weight (kg)	1.365

PACKAGING

Product EAN number	5025768597239
Packaging single length / height (cm)	25.0
Packaging single width (cm)	19.5
Packaging single depth (cm)	20.0
DUN14 (inner)	05025768597239
Units per outer package	1
Packaging outer length / height (cm)	25.0
Packaging outer width (cm)	19.5
Packaging outer depth (cm)	20.0

SAFETY DATA

Glow Wire Test (°C)	650
Special purpose lamp	No
Dry applications use only	No
Suitable for household illumination	No