



### Features

• MC2 D/I 2.4M 4K DALI WHT PRIS LED luminaire, white RAL9016 finishing, direct/indirect distribution (65/35), various accessories available, compact and minimalist design based on the Golden Mean, ideal for offices, meeting rooms, corridors, education facilities, museums and libraries, extruded aluminium body, diffuser: micro prismatic, colour temperature: 4000K neutral white, total system power: 58W, total fixture output: 7700lm, luminaire efficacy: 133m/W, LOR: 100%, colour rendering: Ra >80, LED Chromacity: 3 step MacAdam ellipse, lifespan: 66,000 hours L90B10, IR/UV free light source without heat radiation, operating voltage: 220-240V / 50-60Hz, drive current: (Direct) 800mA + (Indirect) 350mA, electronic driver, DALI dimmable, direct/indirect independently addressable, electrical protection: CLASS I, IP20, suitable for internal environment only.


### Product Overview

|                                   |                                        |
|-----------------------------------|----------------------------------------|
| Product name                      | MC2 D/I 2.4M 4K DALI WHT PRIS          |
| Technology                        | LED                                    |
| Cap/Base                          | N/A                                    |
| Housing                           | Aluminium                              |
| Mount                             | Suspended                              |
| General application               | Education, Hospitality, Office, Retail |
| ETIM Class                        | EC001743                               |
| E-number FI                       | 4170317                                |
| Fixture luminous flux (lm)        | 7700                                   |
| Luminaire efficacy (lm/W)         | 133                                    |
| LOR (%)                           | 100                                    |
| Correlated colour temperature (k) | 4000                                   |
| Light colour                      | Neutral White                          |
| CRI (Ra)                          | 80                                     |
| Colour Variation Initial (SDCM)   | 3                                      |

## MC2 D/I 2.4M 4K DALI WHT PRIS 2071454

|                                 |                    |
|---------------------------------|--------------------|
| Glare control                   | < 19               |
| Photobiological Risk Group      | RG0                |
| Total power consumption (W)     | 58                 |
| Electrical protection           | Class I            |
| Control gear type               | Electronic ballast |
| Dimmable                        | Yes                |
| Minimum dimming level (%)       | 1                  |
| Housing colour                  | White              |
| IP rating                       | IP20               |
| IK rating                       | IK03               |
| Product EAN number              | 5025768714544      |
| Warranty                        | 5 years            |
| Built in presence detector      | NONE               |
| Virtual assistant compatibility | N/A                |
| Dimming method                  | DALI               |

### Photometry

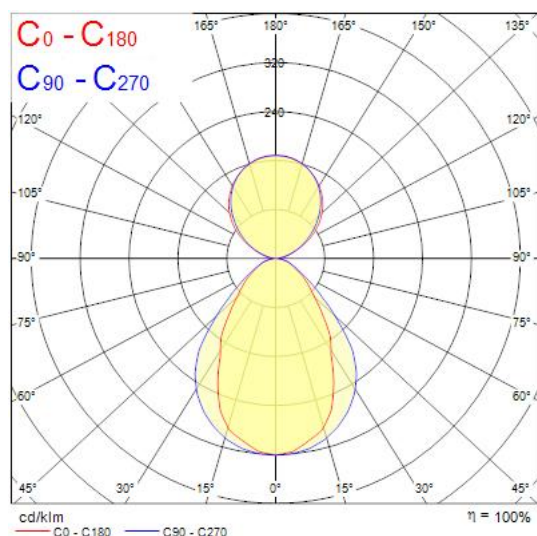

### Technical drawings

