
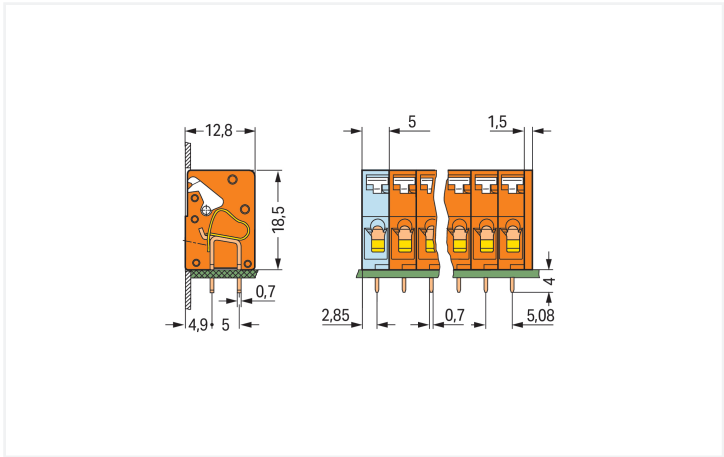


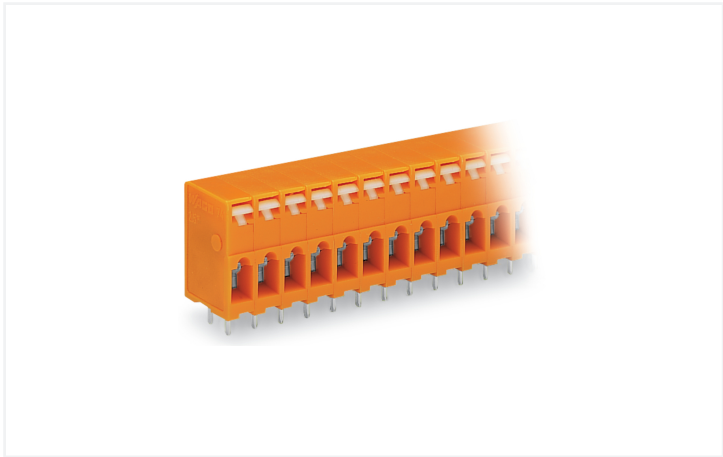

Color: ■ orange      Similar to illustration      Dimensions in mm  
Total length = (pole no. – 1) x pin spacing + 5 mm + 1.5 mm

Feedthrough terminal block, 741 Series, with 5.08 mm pin spacing

Enjoy error-free electrical installations with feedthrough terminal block (item number 741-208). Ensure that the strip lengths are between 5 and 6 mm when connecting conductors to feedthrough terminal block. This product features one conductor terminal and utilizes CAGE CLAMP®. Our proven universal connection known as CAGE CLAMP® is industry-leading when it comes to connection technology and electrical interconnections. Dimensions: (42.14 x 22.5 x 12.8) mm (width x height x depth). Feedthrough terminal block is suitable for conductor cross sections ranging from 0.08 mm² to 2.5 mm².

The contact surface is coated with tin. The feedthrough terminal block is designed for THT soldering.

Notes

Variants:

Other pole numbers  
Other colors  
Direct marking  
Other versions (or variants) can be requested from WAGO Sales or configured at <https://configurator.wago.com/>.

| Electrical data                 |  |                |       |       |               |       |              |
|---------------------------------|--|----------------|-------|-------|---------------|-------|--------------|
| Ratings per                     |  | IEC/EN 60664-1 |       |       | Approvals per |       | UL 1059      |
| Overvoltage category            |  | III            | III   | II    | Use group     | B     | C      D     |
| Pollution degree                |  | 3              | 2     | 2     | Rated voltage | 300 V | -      300 V |
| Nominal voltage                 |  | 250 V          | 320 V | 630 V | Rated current | 10 A  | -      10 A  |
| Rated impulse withstand voltage |  | 4 kV           | 4 kV  | 4 kV  |               |       |              |
| Rated current                   |  | 16 A           | 16 A  | 16 A  |               |       |              |

| Approvals per |  | CSA   |   |       |
|---------------|--|-------|---|-------|
| Use group     |  | B     | C | D     |
| Rated voltage |  | 300 V | - | 300 V |
| Rated current |  | 16 A  | - | 10 A  |



| Connection data            |   |                                                   |                                  |
|----------------------------|---|---------------------------------------------------|----------------------------------|
| Clamping units             | 8 | Connection 1                                      |                                  |
| Total number of potentials | 8 | Connection technology                             | CAGE CLAMP®                      |
| Number of connection types | 1 | Actuation type                                    | Push-button                      |
| Number of levels           | 1 | Solid conductor                                   | 0.08 ... 2.5 mm² / 28 ... 12 AWG |
|                            |   | Fine-stranded conductor                           | 0.08 ... 2.5 mm² / 28 ... 12 AWG |
|                            |   | Fine-stranded conductor; with insulated ferrule   | 0.25 ... 1.5 mm²                 |
|                            |   | Fine-stranded conductor; with uninsulated ferrule | 0.25 ... 1.5 mm²                 |
|                            |   | Strip length                                      | 5 ... 6 mm / 0.2 ... 0.24 inches |
|                            |   | Conductor connection direction to PCB             | 0°                               |
|                            |   | Pole number                                       | 8                                |

| Physical data                        |                          |
|--------------------------------------|--------------------------|
| Pin spacing                          | 5.08 mm / 0.2 inches     |
| Width                                | 42.14 mm / 1.659 inches  |
| Height                               | 22.5 mm / 0.886 inches   |
| Height from the surface              | 18.5 mm / 0.728 inches   |
| Depth                                | 12.8 mm / 0.504 inches   |
| Solder pin length                    | 4 mm                     |
| Solder pin dimensions                | 0.7 x 0.7 mm             |
| Drilled hole diameter with tolerance | 1.1 <sup>(+0.1)</sup> mm |

| PCB contact                         |  |                                          |
|-------------------------------------|--|------------------------------------------|
| PCB contact                         |  | THT                                      |
| Solder pin arrangement              |  | over the entire terminal strip (in-line) |
| Number of solder pins per potential |  | 2                                        |

| Material data                      |  |                                                                          |
|------------------------------------|--|--------------------------------------------------------------------------|
| Note (material data)               |  | <a href="#">Information on material specifications can be found here</a> |
| Color                              |  | orange                                                                   |
| Material group                     |  | I                                                                        |
| Insulation material (main housing) |  | Polyamide (PA66)                                                         |
| Flammability class per UL94        |  | V0                                                                       |
| Clamping spring material           |  | Chrome-nickel spring steel (CrNi)                                        |
| Contact material                   |  | Electrolytic copper (E <sub>Cu</sub> )                                   |
| Contact Plating                    |  | Tin                                                                      |
| Fire load                          |  | 0.217 MJ                                                                 |
| Weight                             |  | 10.6 g                                                                   |

| Environmental requirements |                 |
|----------------------------|-----------------|
| Limit temperature range    | -60 ... +105 °C |



| Commercial data       |                                |
|-----------------------|--------------------------------|
| Product Group         | 4 (Printed Circuit Connectors) |
| PU (SPU)              | 100 (25) pcs                   |
| Packaging type        | Box                            |
| Country of origin     | CH                             |
| GTIN                  | 4044918679879                  |
| Customs tariff number | 85369010000                    |

| Product Classification |                      |
|------------------------|----------------------|
| UNSPSC                 | 39121409             |
| eCl@ss 10.0            | 27-44-04-01          |
| eCl@ss 9.0             | 27-44-04-01          |
| ETIM 9.0               | EC002643             |
| ETIM 10.0              | EC002643             |
| ECCN                   | NO US CLASSIFICATION |

| Environmental Product Compliance |                         |
|----------------------------------|-------------------------|
| RoHS Compliance Status           | Compliant, No Exemption |

Approvals / Certificates

| General approvals                                                                  |               | Declarations of conformity and manufacturer's declarations                                                                                                                                                                                                                                |          |          |                  |                                                         |   |   |                                                         |   |   |
|------------------------------------------------------------------------------------|---------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------|----------|------------------|---------------------------------------------------------|---|---|---------------------------------------------------------|---|---|
|  |               |                                                                                                                                                                                                                                                                                           |          |          |                  |                                                         |   |   |                                                         |   |   |
| Approval                                                                           | Standard      | Certificate Name                                                                                                                                                                                                                                                                          |          |          |                  |                                                         |   |   |                                                         |   |   |
| CCA<br>DEKRA Certification B.V.                                                    | EN 60947      | 2160584.21                                                                                                                                                                                                                                                                                |          |          |                  |                                                         |   |   |                                                         |   |   |
| CCA<br>DEKRA Certification B.V.                                                    | EN 60947      | NTR NL-7104                                                                                                                                                                                                                                                                               |          |          |                  |                                                         |   |   |                                                         |   |   |
| CCA<br>DEKRA Certification B.V.                                                    | EN 60998      | 2166926.01                                                                                                                                                                                                                                                                                |          |          |                  |                                                         |   |   |                                                         |   |   |
| CCA<br>DEKRA Certification B.V.                                                    | EN 60998      | NTR NL-7187                                                                                                                                                                                                                                                                               |          |          |                  |                                                         |   |   |                                                         |   |   |
| CSA<br>DEKRA Certification B.V.                                                    | C22.2 No. 158 | 1711139                                                                                                                                                                                                                                                                                   |          |          |                  |                                                         |   |   |                                                         |   |   |
| UR<br>Underwriters Laboratories Inc.                                               | UL 1059       | E45172                                                                                                                                                                                                                                                                                    |          |          |                  |                                                         |   |   |                                                         |   |   |
|                                                                                    |               | <table><tr><th>Approval</th><th>Standard</th><th>Certificate Name</th></tr><tr><td>EU-Declaration of Confor-<br/>mity<br/>WAGO GmbH &amp; Co. KG</td><td>-</td><td>-</td></tr><tr><td>UK-Declaration of Confor-<br/>mity<br/>WAGO GmbH &amp; Co. KG</td><td>-</td><td>-</td></tr></table> | Approval | Standard | Certificate Name | EU-Declaration of Confor-<br>mity<br>WAGO GmbH & Co. KG | - | - | UK-Declaration of Confor-<br>mity<br>WAGO GmbH & Co. KG | - | - |
| Approval                                                                           | Standard      | Certificate Name                                                                                                                                                                                                                                                                          |          |          |                  |                                                         |   |   |                                                         |   |   |
| EU-Declaration of Confor-<br>mity<br>WAGO GmbH & Co. KG                            | -             | -                                                                                                                                                                                                                                                                                         |          |          |                  |                                                         |   |   |                                                         |   |   |
| UK-Declaration of Confor-<br>mity<br>WAGO GmbH & Co. KG                            | -             | -                                                                                                                                                                                                                                                                                         |          |          |                  |                                                         |   |   |                                                         |   |   |

Approvals for marine applications

|  |           |                   |
|------------------------------------------------------------------------------------|-----------|-------------------|
| Approval                                                                           | Standard  | Certificate Name  |
| ABS<br>American Bureau of Ship-<br>ping                                            | -         | 24-0095975-PDA    |
| BV<br>Bureau Veritas S.A.                                                          | IEC 60998 | 11915/E0 BV       |
| DNV<br>DNV GL SE                                                                   | -         | TAE000016Z        |
| PRS<br>Polski Rejestr Statków                                                      | -         | TE/1095/880590/23 |

Downloads

Environmental Product Compliance

Compliance Search

Environmental Product Compliance 741-208

↓

Documentation

Additional Information

Technical Section

03.04.2019

pdf

2027.26 KB

↓

CAD/CAE-Data

CAD data

2D/3D Models 741-208

↓

CAE data

EPLAN Data Portal 741-208

↓

ZUKEN Portal 741-208

↓

PCB Design

Symbol and Footprint via SamacSys 741-208

↓

Symbol and Footprint via Ultra Librarian 741-208

↓

1 Compatible Products

1.1 Optional Accessories

1.1.1 Ferrule

1.1.1.1 Ferrule

|                                                                                                                                                                                                                                                              |                                                                                                                                                                                                                                                                                |                                                                                                                                                                                                        |                                                                                                                                                                                                                                                                             |
|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
|  <div><b>Item No.: 216-301</b><br/>Ferrule; Sleeve for 0.25 mm² / AWG 24; insulated; electro-tin plated; yellow</div>                                                     |  <div><b>Item No.: 216-321</b><br/>Ferrule; Sleeve for 0.25 mm² / AWG 24; insulated; electro-tin plated; yellow</div>                                                                       |  <div><b>Item No.: 216-151</b><br/>Ferrule; Sleeve for 0.25 mm² / AWG 24; uninsulated; electro-tin plated</div>     |  <div><b>Item No.: 216-131</b><br/>Ferrule; Sleeve for 0.25 mm² / AWG 24; uninsulated; electro-tin plated; silver-colored</div>                                                        |
|  <div><b>Item No.: 216-302</b><br/>Ferrule; Sleeve for 0.34 mm² / 22 AWG; insulated; electro-tin plated; light turquoise</div>                                            |  <div><b>Item No.: 216-322</b><br/>Ferrule; Sleeve for 0.34 mm² / 22 AWG; insulated; electro-tin plated; light turquoise</div>                                                              |  <div><b>Item No.: 216-132</b><br/>Ferrule; Sleeve for 0.34 mm² / AWG 24; uninsulated; electro-tin plated</div>     |  <div><b>Item No.: 216-152</b><br/>Ferrule; Sleeve for 0.34 mm² / AWG 24; uninsulated; electro-tin plated</div>                                                                        |
|  <div><b>Item No.: 216-201</b><br/>Ferrule; Sleeve for 0.5 mm² / 20 AWG; insulated; electro-tin plated; electrolytic copper; acc. to DIN 46228, Part 4/09.90; white</div> |  <div><b>Item No.: 216-241</b><br/>Ferrule; Sleeve for 0.5 mm² / 20 AWG; insulated; electro-tin plated; electrolytic copper; gastight crimped; acc. to DIN 46228, Part 4/09.90; white</div> |  <div><b>Item No.: 216-221</b><br/>Ferrule; Sleeve for 0.5 mm² / 20 AWG; insulated; electro-tin plated; white</div> |  <div><b>Item No.: 216-141</b><br/>Ferrule; Sleeve for 0.5 mm² / 20 AWG; uninsulated; electro-tin plated; electrolytic copper; gastight crimped; acc. to DIN 46228, Part 1/08.92</div> |



1.1.1.1 Ferrule

|                                                                                                                                                                                                                                                                       |                                                                                                                                                                                                                                                                 |                                                                                                                                                                                                                                                                                   |                                                                                                                                                                                                                                                                        |
|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <br><b>Item No.: 216-101</b><br>Ferrule; Sleeve for 0.5 mm² / AWG 22; un-insulated; electro-tin plated; silver-colored                                                               | <br><b>Item No.: 216-121</b><br>Ferrule; Sleeve for 0.5 mm² / AWG 22; un-insulated; electro-tin plated; silver-colored                                                         | <br><b>Item No.: 216-242</b><br>Ferrule; Sleeve for 0.75 mm² / 18 AWG; insulated; electro-tin plated; electrolytic copper; gastight crimped; acc. to DIN 46228, Part 4/09.90; gray               | <br><b>Item No.: 216-262</b><br>Ferrule; Sleeve for 0.75 mm² / 18 AWG; insulated; electro-tin plated; electrolytic copper; gastight crimped; acc. to DIN 46228, Part 4/09.90; gray  |
| <br><b>Item No.: 216-202</b><br>Ferrule; Sleeve for 0.75 mm² / 18 AWG; insulated; electro-tin plated; gray                                                                           | <br><b>Item No.: 216-222</b><br>Ferrule; Sleeve for 0.75 mm² / 18 AWG; insulated; electro-tin plated; gray                                                                     | <br><b>Item No.: 216-142</b><br>Ferrule; Sleeve for 0.75 mm² / 18 AWG; un-insulated; electro-tin plated; electrolytic copper; gastight crimped; acc. to DIN 46228, Part 1/08.92                  | <br><b>Item No.: 216-102</b><br>Ferrule; Sleeve for 0.75 mm² / AWG 20; un-insulated; electro-tin plated; silver-colored                                                             |
| <br><b>Item No.: 216-122</b><br>Ferrule; Sleeve for 0.75 mm² / AWG 20; un-insulated; electro-tin plated; silver-colored                                                              | <br><b>Item No.: 216-243</b><br>Ferrule; Sleeve for 1 mm² / AWG 18; insulated; electro-tin plated; electrolytic copper; gastight crimped; acc. to DIN 46228, Part 4/09.90; red | <br><b>Item No.: 216-263</b><br>Ferrule; Sleeve for 1 mm² / AWG 18; insulated; electro-tin plated; electrolytic copper; gastight crimped; acc. to DIN 46228, Part 4/09.90; red                   | <br><b>Item No.: 216-203</b><br>Ferrule; Sleeve for 1 mm² / AWG 18; insulated; electro-tin plated; red                                                                              |
| <br><b>Item No.: 216-223</b><br>Ferrule; Sleeve for 1 mm² / AWG 18; insulated; electro-tin plated; red                                                                               | <br><b>Item No.: 216-103</b><br>Ferrule; Sleeve for 1 mm² / AWG 18; un-insulated; electro-tin plated                                                                           | <br><b>Item No.: 216-143</b><br>Ferrule; Sleeve for 1 mm² / AWG 18; un-insulated; electro-tin plated; electrolytic copper; gastight crimped; acc. to DIN 46228, Part 1/08.92                     | <br><b>Item No.: 216-123</b><br>Ferrule; Sleeve for 1 mm² / AWG 18; un-insulated; electro-tin plated; silver-colored                                                                |
| <br><b>Item No.: 216-204</b><br>Ferrule; Sleeve for 1.5 mm² / AWG 16; insulated; electro-tin plated; black                                                                          | <br><b>Item No.: 216-224</b><br>Ferrule; Sleeve for 1.5 mm² / AWG 16; insulated; electro-tin plated; black                                                                    | <br><b>Item No.: 216-244</b><br>Ferrule; Sleeve for 1.5 mm² / AWG 16; insulated; electro-tin plated; electrolytic copper; gastight crimped; acc. to DIN 46228, Part 4/09.90; black              | <br><b>Item No.: 216-264</b><br>Ferrule; Sleeve for 1.5 mm² / AWG 16; insulated; electro-tin plated; electrolytic copper; gastight crimped; acc. to DIN 46228, Part 4/09.90; black |
| <br><b>Item No.: 216-284</b><br>Ferrule; Sleeve for 1.5 mm² / AWG 16; insulated; electro-tin plated; electrolytic copper; gastight crimped; acc. to DIN 46228, Part 4/09.90; black | <br><b>Item No.: 216-124</b><br>Ferrule; Sleeve for 1.5 mm² / AWG 16; un-insulated; electro-tin plated                                                                       | <br><b>Item No.: 216-144</b><br>Ferrule; Sleeve for 1.5 mm² / AWG 16; un-insulated; electro-tin plated; electrolytic copper; gastight crimped; acc. to DIN 46228, Part 1/08.92; silver-colored | <br><b>Item No.: 216-104</b><br>Ferrule; Sleeve for 1.5 mm² / AWG 16; un-insulated; electro-tin plated; silver-colored                                                            |

1.1.2 Marking

1.1.2.1 Marking strip

|                                                                                                                                                                                                                                                                                |                                                                                                                                                                                                                                                                               |                                                                                                                                                                                                                                                                                  |                                                                                                                                                                                                                                                                                   |
|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <br><b>Item No.: 210-332/508-202</b><br>Marking strips; as a DIN A4 sheet; MARKED; 1-16 (160x); Height of marker strip: 3 mm; Strip length 182 mm; Horizontal marking; Self-adhesive; white | <br><b>Item No.: 210-332/508-205</b><br>Marking strips; as a DIN A4 sheet; MARKED; 1-32 (80x); Height of marker strip: 3 mm; Strip length 182 mm; Horizontal marking; Self-adhesive; white | <br><b>Item No.: 210-332/508-204</b><br>Marking strips; as a DIN A4 sheet; MARKED; 17-32 (160x); Height of marker strip: 3 mm; Strip length 182 mm; Horizontal marking; Self-adhesive; white | <br><b>Item No.: 210-332/508-206</b><br>Marking strips; as a DIN A4 sheet; MARKED; 33-48 (160x); Height of marker strip: 3 mm; Strip length 182 mm; Horizontal marking; Self-adhesive; white |
|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|



1.1.3 Tool

1.1.3.1 Operating tool



Item No.: 210-720

Operating tool; Blade: 3.5 x 0.5 mm; with a partially insulated shaft; multicoloured



Item No.: 210-657

Operating tool; Blade: 3.5 x 0.5 mm; with a partially insulated shaft; short; multicoloured