


# Concord

## BEACON XL 93CRI 3K WIDE BEAM L3 ON-BOARD DIM WHITE 2059691

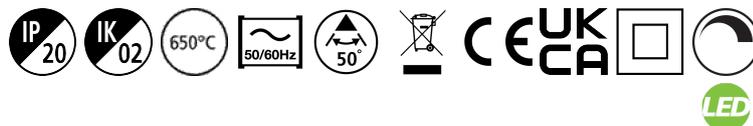

### Features

- Integrated LED spotlight, white RAL 9016, compact and minimalist design, ideal for retail, display, museum and gallery applications, die-cast aluminium body, passive cooling heatsink, beam angle: 50° wide beam, optics: Polycarbonate lens, colour temperature: 3000K warm white, total system power: 33W, total fixture output: 2700lm, luminaire efficacy: 82lm/W, LOR: 100%, colour rendering: Ra 93 typical, LED Chromacity: 3 step MacAdam ellipse, IR/UV free light source without heat radiation, operating voltage: 220-240V / 50-60Hz, drive current: 850mA, electronic driver, dimmable via on-board potentiometer, power factor: 0.9 electrical protection: CLASS II, 3-circuit track adaptor, suitable for Concord Lytespan 3 track, ingress protection rating: IP20, suitable for internal environment only, horizontal rotation: 355°, vertical tilt: 90°, dimensions: Ø113x165x205mm, weight: 1.66kg.

### Product Overview


<b>Product name</b>	BEACON XL 93CRI 3K WIDE BEAM L3 ON-BOARD DIM WHITE
<b>Technology</b>	LED
<b>Cap/Base</b>	N/A
<b>Housing</b>	Aluminium
<b>Mount</b>	Track mounting
<b>Environment</b>	Internal
<b>General application</b>	Museums & Galleries, Retail
<b>ETIM Class</b>	EC001744
<b>E-number FI</b>	4280851
<b>Fixture luminous flux (lm)</b>	2700
<b>Luminaire efficacy (lm/W)</b>	82
<b>LOR (%)</b>	100

# Concord

## BEACON XL 93CRI 3K WIDE BEAM L3 ON-BOARD DIM WHITE 2059691

Correlated colour temperature (k)	3000
Light colour	Warm White
CRI (Ra)	93
Colour Consistency (SDCM)	3
Beam Angle (°)	50
Photobiological Risk Group	RG1
Total power consumption (W)	33
Electrical protection	Class II
Control gear type	Electronic ballast
Dimmable	Yes
Minimum dimming level (%)	1
Housing colour	White
IP rating	IP20
IK rating	IK02
Product EAN number	5025768596911
Warranty	5 years
Dimming method	1-10V (Analogue)

### Photometry

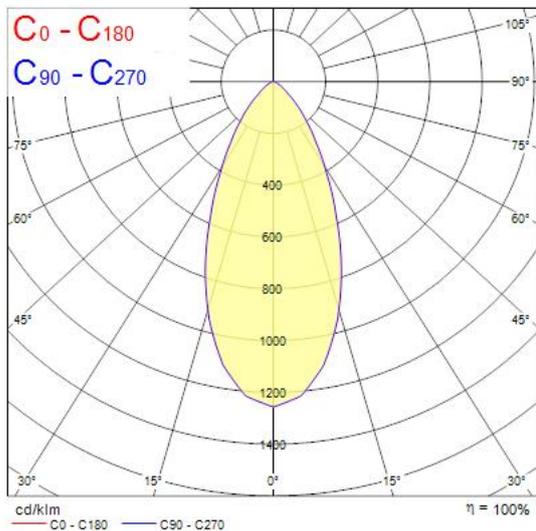

### Technical drawings

