


# Concord

## BEACON 93CRI 4K MEDIUM BEAM L3 ON-BOARD DIM BLACK 2059642

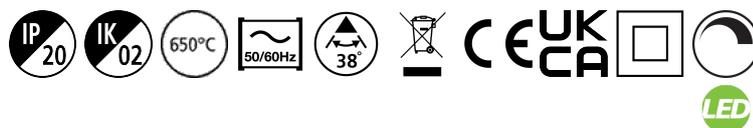

### Features

- Integrated LED spotlight, black RAL 9005, compact and minimalist design, ideal for retail, display, museum and gallery applications, die-cast aluminium body, passive cooling heatsink, beam angle: 38° medium beam, optics: Aluminium reflector, colour temperature: 4000K neutral white, total system power: 21W, total fixture output: 1885lm, luminaire efficacy: 90lm/W, LOR: 100%, colour rendering: Ra 93 typical, LED Chromacity: 3 step MacAdam ellipse, IR/UV free light source without heat radiation, operating voltage: 220-240V / 50-60Hz, drive current: 500mA, electronic driver, dimmable via on-board potentiometer, power factor: 0.9 electrical protection: CLASS II, 3-circuit track adaptor, suitable for Concord Lytespan 3 track, ingress protection rating: IP20, suitable for internal environment only, horizontal rotation: 355°, vertical tilt: 90°, dimensions: Ø80x130x190mm, weight: 0.96kg.

### Product Overview


<b>Product name</b>	BEACON 93CRI 4K MEDIUM BEAM L3 ON-BOARD DIM BLACK
<b>Technology</b>	LED
<b>Cap/Base</b>	N/A
<b>Housing</b>	Aluminium
<b>Mount</b>	Track mounting
<b>Environment</b>	Internal
<b>General application</b>	Museums & Galleries, Retail
<b>ETIM Class</b>	EC001744
<b>Fixture luminous flux (lm)</b>	1885
<b>Luminaire efficacy (lm/W)</b>	90
<b>LOR (%)</b>	100
<b>Correlated colour temperature (k)</b>	4000

# Concord

## BEACON 93CRI 4K MEDIUM BEAM L3 ON-BOARD DIM BLACK 2059642

Light colour	Neutral White
CRI (Ra)	93
Colour Consistency (SDCM)	3
Beam Angle (°)	38
Photobiological Risk Group	RG1
Total power consumption (W)	21
Electrical protection	Class II
Control gear type	Electronic ballast
Dimmable	Yes
Minimum dimming level (%)	5
Housing colour	Black
IP rating	IP20
IK rating	IK02
Product EAN number	5025768596423
Warranty	5 years
Dimming method	1-10V (Analogue)


### Photometry

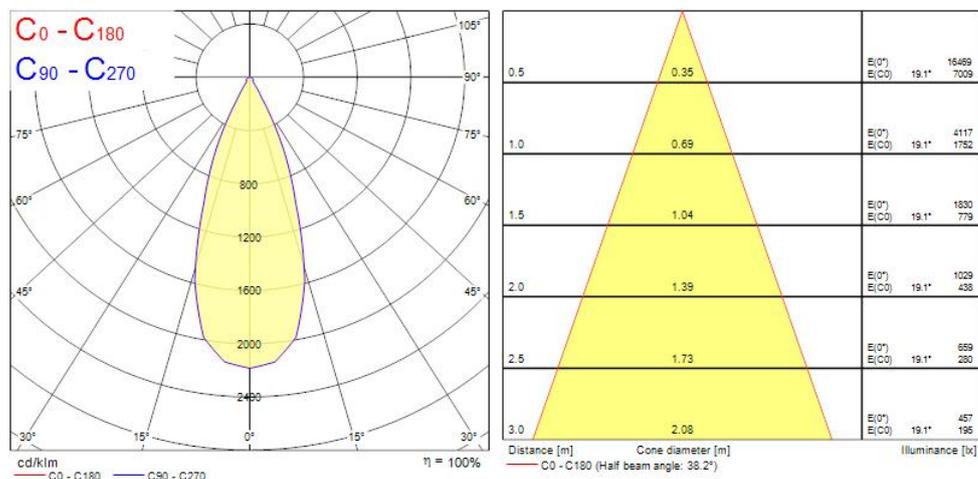

# Concord

## BEACON 93CRI 4K MEDIUM BEAM L3 ON-BOARD DIM BLACK 2059642

### Technical drawings

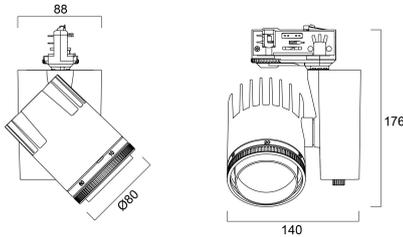

### Data table

#### GENERAL DATA

Product name	BEACON 93CRI 4K MEDIUM BEAM L3 ON-BOARD DIM BLACK
Technology	LED
Cap/Base	N/A
Housing	Aluminium
Mount	Track mounting
Environment	Internal
General application	Museums & Galleries, Retail
Performance ambient temperature Tq (°C)	25
ETIM Class	EC001744
Warranty	5 years

#### OPTICAL DATA

Fixture luminous flux (lm)	1885
Luminaire efficacy (lm/W)	90
LOR (%)	100
Correlated colour temperature (k)	4000
Light colour	Neutral White
CRI (Ra)	93
Colour Consistency (SDCM)	3

# Concord

## BEACON 93CRI 4K MEDIUM BEAM L3 ON-BOARD DIM BLACK 2059642

Adjustable chromaticity	N
Beam Angle (°)	38
Photobiological Risk Group	RG1

### ELECTRICAL DATA

Total power consumption (W)	21
Primary Supply/Product voltage - min (V)	220
Primary Supply/Product voltage - max (V)	240
Lamp power factor	0.9
Electrical protection	Class II
Control gear required	No
Control gear type	Electronic ballast
Dimmable	Yes
Dimming method	1-10V (Analogue)
Minimum dimming level (%)	5
Drive current (mA)	500
Inrush Current (A)	45
Inrush Duration (µs)	20
Energy Efficiency Class (A->G) of contained light source	E
Nominal Frequency (Hz)	50/60Hz
Max. products per 10A C Breaker	48
Max. products per 16A C Breaker	80

### LIFETIME DATA

Lifespan L70 B50	72000
Lifespan L70 B10	72000
Lifespan L80 B50	72000
Lifespan L80 B20	72000
Lifespan L80 B10	72000
Lifespan L90 B50	43000
Lifespan L90 B20	36000
Lifespan L90 B10	33000

# Concord

## BEACON 93CRI 4K MEDIUM BEAM L3 ON-BOARD DIM BLACK 2059642

### PHYSICAL DATA

Housing colour	Black
IP rating	IP20
IK rating	IK02
Nominal Product Width (mm)	130
Nominal Product Height (mm)	190
Nominal Product Diameter (mm)	80
Weight (kg)	0.7

### PACKAGING

Product EAN number	5025768596423
Packaging single length / height (cm)	16.0
Packaging single width (cm)	17.6
Packaging single depth (cm)	18.2
DUN14 (inner)	05025768596423
Units per outer package	1
Packaging outer length / height (cm)	16.0
Packaging outer width (cm)	17.6
Packaging outer depth (cm)	18.2

### SAFETY DATA

Glow Wire Test (°C)	650
Special purpose lamp	No
Dry applications use only	No
Suitable for household illumination	No