
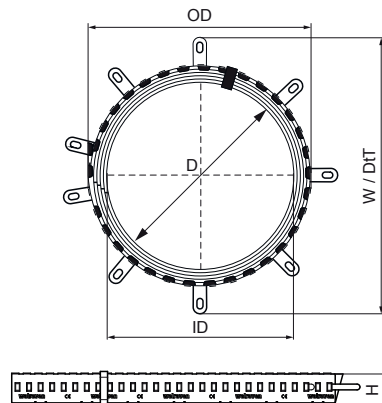


Walraven Pacifyre® BFC

(U0438)

Basic fire collar for plastic and multi-layer pipes



Features & benefits

- Easy to install
- Suitable for damp conditions
- Oversized for increased flexibility in positioning
- Up to 2 hours fire protection in wall penetrations
- Up to 4 hours fire protection on floor penetrations
- Low height increases installation flexibility
- For thin- and thick-walled pipes
- For flexible walls, solid walls and floors
- With a fire resistance up to EI 120 U/C
- Tested and approved according to EN 1366-3



Productnumber	Outside Pipe Diameter	Inner Diameter	Outer Diameter	Total Height	Total Width	Total Depth	Number Of Fixations Needed
Reference Letter	D	ID	OD	H	W	DtT	
Unit description	mm	mm	mm	mm	mm	mm	
2133000050	0 - 50	56	70	44	31	267	2
2133000063	51 - 63	67	90	44	33	313	3
2133000075	64 - 75	80	100	44	33	345	3
2133000090	76 - 90	98	125	44	35	423	3
2133000110	91 - 110	118	150	58	35	487	3
2133000125	111 - 125	130	160	44	37	533	4
2133000140	126 - 140	145	180	44	39	595	4
2133000160	141 - 160	165	200	44	39	659	4