

## ToLEDo GLS

ToLEDo GLS V7 1521LM 865 E27 SL

0029595



### Product features

- Compact and elegant design
- Suitable replacement for halogen, incandescent and compact fluorescent lamps
- Instant light at the flick of a switch
- Uniform light distribution
- Good colour rendering (CRI 80)
- Perfect for hotels, restaurants, lobbies, corridors, stairwells, reception areas
- Lower maintenance costs
- 15,000 hours average rated life



## PRODUCT OVERVIEW

Product name	ToLEDo GLS V7 1521LM 865 E27 SL
Technology	LED
Watt (Rated) (W)	13
Type	LED exchangeable
Cap/Base	E27
Fixture rating	Open
General application	Hospitality, Residential & Consumer
ETIM Class	EC001959
E-number FI	4740987
Warranty	3 years
Luminous flux (lm)	1521
Colour temperature (K)	6500
Light colour	Daylight
CRI (Ra)	80
Colour Variation Initial (SDCM)	SDCM6
Photobiological Risk Group	RG0
Wattage (W)	13
Dimmable	No
Average life (Nominal) (h)	15000
Product EAN number	5410288295954

## DATA TABLE

## ToLEDo GLS

ToLEDo GLS V7 1521LM 865 E27 SL

0029595

### General data

Product name	ToLEDo GLS V7 1521LM 865 E27 SL
Technology	LED
Watt (Rated) (W)	13
Type	LED exchangeable
Cap/Base	E27
Fixture rating	Open
General application	Hospitality, Residential & Consumer
Operating temperature range (°C)	-20°C...+40°C
Performance ambient temperature Tq (°C)	25
ETIM Class	EC001959
E-number FI	4740987
Warranty	3 years

### Optical data

Luminous flux (lm)	1521
Luminous flux (Rated) (lm)	1521
Colour temperature (K)	6500
Light colour	Daylight
CRI (Ra)	80
Colour Variation Initial (SDCM)	SDCM6
Photobiological Risk Group	RG0
Lumen maintenance at end of nominal life (%)	70

### Electrical data

Wattage (W)	13
Equivalent watt (W)	100
Primary Supply/Product voltage - min (V)	220
Primary Supply/Product voltage - max (V)	240
Control gear required	No
No. Of switching cycles before premature failures	>100000
Dimmable	No
Inrush Current (A)	6
Inrush Duration (µs)	350
Lamp Energy Label (class)	E
Nominal Frequency (Hz)	50/60Hz
Max. products per 16A C Breaker	27
Max. products per 16A B Breaker	13

### Lifetime data

Lifespan L70 B50	15000
Average life (Nominal) (h)	15000
Average life (Rated) (h)	15000

### Physical data

Nominal Product Length (mm)	120
-----------------------------	-----

## ToLEDo GLS

ToLEDo GLS V7 1521LM 865 E27 SL

0029595

Nominal Product Diameter (mm)	60
Weight (kg)	0.042


### Packaging

Single packaging type	Carton
Product EAN number	5410288295954
Packaging single length / height (cm)	6.0
Packaging single width (cm)	6.0
Packaging single depth (cm)	12.2
DUN14 (outer)	15410288295951
Units per outer package	6
Packaging outer length / height (cm)	18.8
Packaging outer width (cm)	12.7
Packaging outer depth (cm)	13.0


### Safety data

Optimal operating condition (°C)	-20-40
Breakage cleaning instructions	Not applicable
Special purpose lamp	No
Dry applications use only	Yes
Suitable for household illumination	Yes
Safety message	Not Suitable for totally enclosed fixtures

## PHOTOMETRY

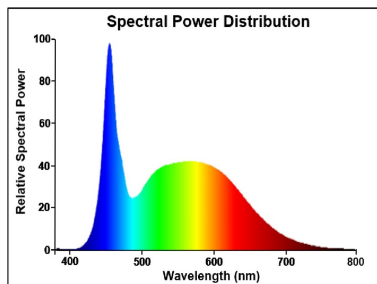

## TECHNICAL DRAWINGS



ToLEDo GLS


ToLEDo GLS V7 1521LM 865 E27 SL

0029595



SYLVANIA

0029595

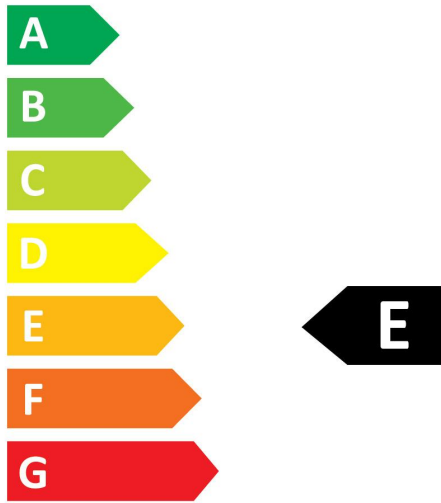

**13**  
kWh/1000h



2019/2015


ToLEDo GLS

ToLEDo GLS V7 1521LM 865 E27 SL

0029595



0029595

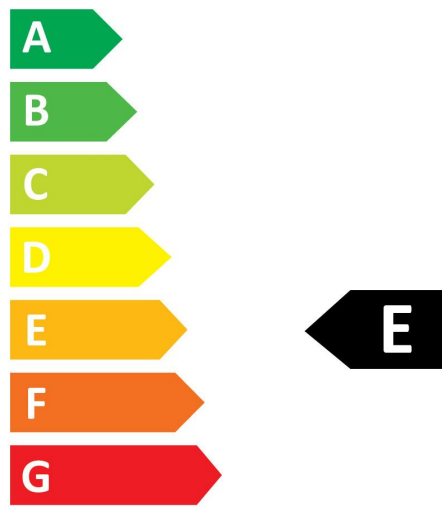

**13**  
kWh/1000h



2019/2015