

Concord

CONCORD BEACON 3000K WIDE SSC WHITE 2062494



Features

- Simple and slick integral design with no driver box and without any visible screws
- New technology utilization for improved performance
- Invisible in-track adaptor for an impressive architectural look
- Extremely precise light beams due to the high-quality lenses
- #80mm die-cast aluminium body, Fix beam angle: 55° , Textured white finishing colour
- Light color temperature: 3000K, warm light
- System power: 18W, Fixture lumen output: 1525lm, efficacy: 85lm/W, Ra97 typical, LED chromacity: 2 step MacAdam ellipse LED source (SDCM2), IR/UV free light source without heat radiation
- Operating voltage 220-240V / 50-60Hz, electronic driver, dimmable via SylSmart
- Standalone SSC Suitable for installation on 3-circuit tracks, please check compatibility list on the instruction sheet. Compatible with OneTrack
- Electrical protection: Class II. Degree of protection: IP20, suitable for indoor environment only
- Horizontal rotation: 355°, vertical tilt: 90°
- Nominal product dimensions: D.80mmx200mm
- 5 years warranty. Suitable for track mounting

Product Overview


Product name	CONCORD BEACON 3000K WIDE SSC WHITE
Technology	LED
Cap/Base	N/A
Housing	Aluminium
Mount	Track mounting
Fixture rating	Enclosed
General application	Museums & Galleries, Retail, Hospitality
ETIM Class	EC001744
Fixture luminous flux (lm)	1525

Concord

CONCORD BEACON 3000K WIDE SSC WHITE 2062494

Luminaire efficacy (lm/W)	85
LOR (%)	100
Correlated colour temperature (k)	3000
Light colour	Warm White
CRI (Ra)	97
Colour Variation Initial (SDCM)	2
Beam Angle (°)	55
Photobiological Risk Group	RG1
Total power consumption (W)	18
Electrical protection	Class II
Control gear type	LED driver constant current
Dimmable	Yes
Minimum dimming level (%)	1
Housing colour	RAL 9016 - Traffic white / Bezel
IP rating	IP20
IK rating	IK02
Product EAN number	5025768624942
Warranty	5 years
Dimming method	SylSmart SSC
Useful luminous flux (#use)	1475

Photometry

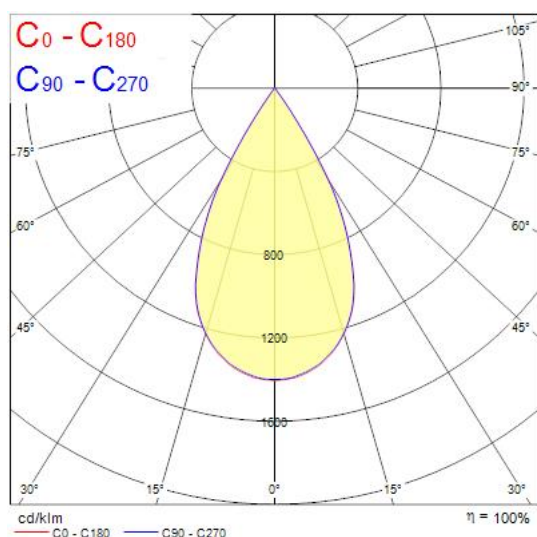

Technical drawings

