

## Start Flood Flat IP65 1850LM 830 Black 0050109



### Features

- The streamlined, durable, lightweight die-cast aluminium body makes Start Flood Flat a perfect choice for building facades, car parks, garages and construction areas. The product includes 1 m pre-wired stripped cable and fitting bracket for quick and easy installation and the universal mounting bracket allows wall or surface mounting with the possibility of vertical tilting. Black (RAL9017) housing, white reflector, 1850 lm, 18 W, 103 lm/W, 3000K, non dimmable, CRI>80, IP65, IK06, Class I, lifespan L70:B50: 90000 hrs, 110 x 123 x 26 mm (L x W x H). Weight: 0.39kg.


### Product Overview

Product name	Start Flood Flat IP65 1850LM 830 Black
Technology	LED
General application	Residential & Consumer
ETIM Class	EC001744
E-number FI	4579528
Fixture luminous flux (lm)	1850
Luminaire efficacy (lm/W)	103
Correlated colour temperature (k)	3000
Light colour	Warm White
CRI (Ra)	80
Colour Variation Initial (SDCM)	5
Beam Angle (°)	110
Photobiological Risk Group	RG1
Total power consumption (W)	18
Electrical protection	Class I
LED Flickering Rate	Low (6% - 20%)
Housing colour	Black
IP rating	IP65

## Start Flood Flat IP65 1850LM 830 Black 0050109

IK rating	IK06
Product EAN number	5410288501093
Warranty	3 years
Dimming method	N/A
Useful luminous flux (#use)	1850

### Photometry

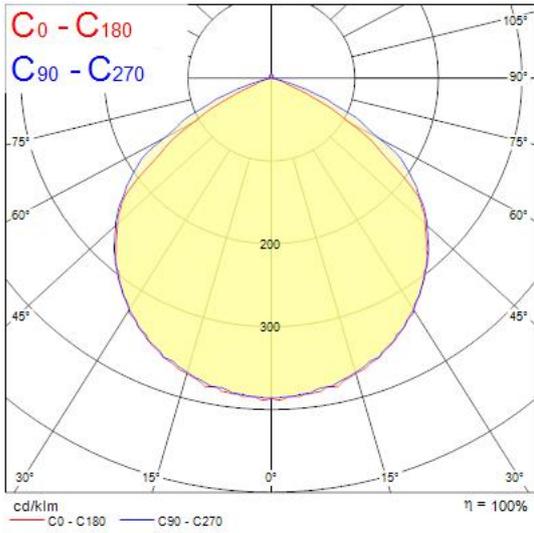

### Technical drawings

