


Start Flood Flat without PIR

Start Flood Flat IP65 1000LM 840 White
0050108



Product features

- The streamlined, durable, lightweight die-cast aluminium body makes Start Flood Flat a perfect choice for building facades, car parks, garages and construction areas. The product includes 1 m pre-wired stripped cable and fitting bracket for quick and easy installation and the universal mounting bracket allows wall or surface mounting with the possibility of vertical tilting. White (RAL9003) housing, white reflector, 1000 lm, 9 W, 111 lm/W, 4000K, non dimmable, CRI>80, IP65, IK06, Class I, lifespan L70:B50: 90000 hrs, 100 x 105 x 23 mm (L x W x H). Weight: 0.32kg.

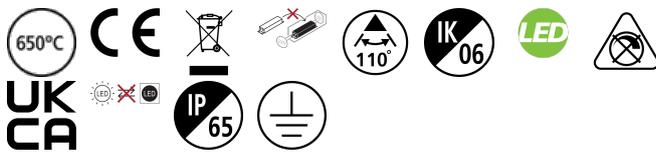


PRODUCT OVERVIEW

Product name	Start Flood Flat IP65 1000LM 840 White
Technology	LED
General application	Residential & Consumer
ETIM Class	EC001744
E-number FI	4579545
Warranty	3 years
Useful luminous flux (Fuse)	1000
Fixture luminous flux (lm)	1000
Luminaire efficacy (lm/W)	111
Correlated colour temperature (k)	4000
Light colour	Neutral White
CRI (Ra)	80
Colour Variation Initial (SDCM)	SDCM5
Beam Angle (°)	110
Photobiological Risk Group	RG1
Total power consumption (W)	9
Electrical protection	Class I
Dimmable	No
Dimming method	N/A
LED Flickering Rate	Low (6% - 20%)
Housing colour	White
IP rating	IP65
IK rating	IK06
Product EAN number	5410288501086

PHOTOMETRY

Start Flood Flat without PIR

Start Flood Flat IP65 1000LM 840 White
0050108



0.5	1.45	1810
	1.22	141
1.0	2.91	82
	2.43	38
1.5	4.36	19
	3.65	23
2.0	5.82	9
	4.87	13
2.5	7.28	6
	6.09	8
3.0	8.74	4
	7.30	6

Distance [m] Cone diameter [m] Illuminance [lx]
 — C0 - C180 (Half beam angle: 112.0°)
 — C90 - C270 (Half beam angle: 112.0°)

TECHNICAL DRAWINGS

